




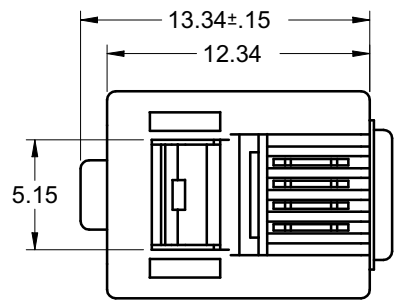

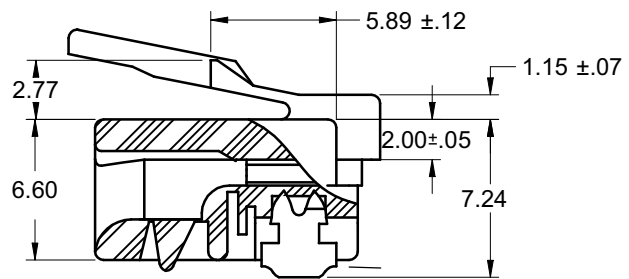
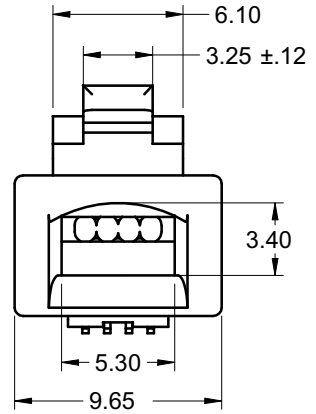


受控 CONTROLLED DOCUMENT

编号 P/N	32-5994UL	版本 Rev	01	日期 Rel'd Date	SEP 14,09
-----------	-----------	-----------	----	------------------	-----------

DRAWING NO.
32-5994UL

REVISIONS					
01	OFFICIAL RELEASE				
	08-19-09	Y	U	T	T
					<i>Betty</i>



NOTES:

1. ELECTRICAL SPECIFICATIONS

INSULATION RESISTANCE: 1000 MEGOHMS
WITHSTAND VOLTAGE: 1000V,AC/ MINUTE

2. MECHANICAL SPECIFICATIONS


CONTACT MATERIAL: PHOSPHOR BRONZE 0.3MM THICKNESS
CONTACT PLATING: 50 MICRO-INCH GOLD PLATE OVER 100 MICRO-INCH NICKEL PLATING
HOUSING MATERIAL: POLYCARBONATE
DURABILITY: 1000 CYCLES MIN
UL FLAMABILITY RATING: 94-V0

3. ENVIRONMENTAL SPECIFICATIONS

TEMPERATURE RANGE: -40 °C TO +70°C

THIS DRAWING TO BE INTERPRETED PER ANSI Y 14.5M - 1994

COMPANY CONFIDENTIAL



TOLERANCE UNLESS OTHERWISE SPECIFIED		DRAWN BY	DATE
DECIMALS	mm	BETTY.YU	09-15-05
X	± 0.5	CHECKED BY	DATE
X.X	± 0.15	TERRY.W	09-15-05
X.XX	± 0.10	APPROVED BY	DATE
ANGLES	± 0.5°	THOMAS	09-15-05
		U/M:	mm

TITLE
RJ11 MOD PLUG FOR ROUND SOLID

THIS DRAWING WAS PRODUCED BY COMPUTER, DO NOT SCALE DRAWING OR UPDATE MANUALLY.	SHEET 1 OF 1	DRAWING NO. 32-5994UL	SIZE C
---	-----------------	---------------------------------	------------------