
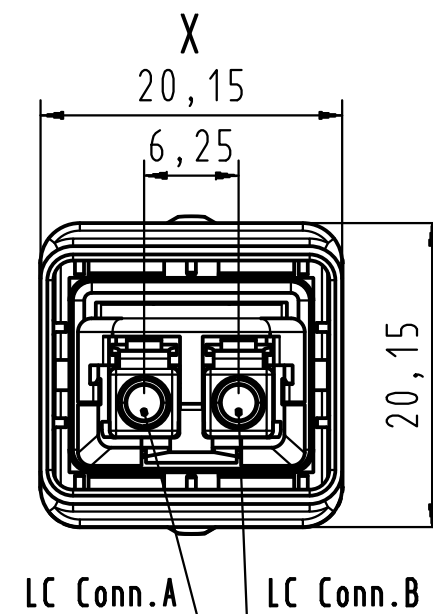
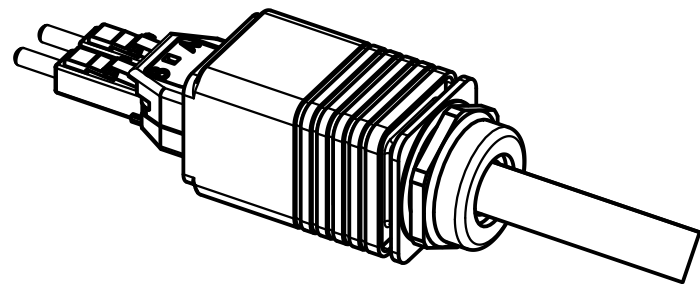


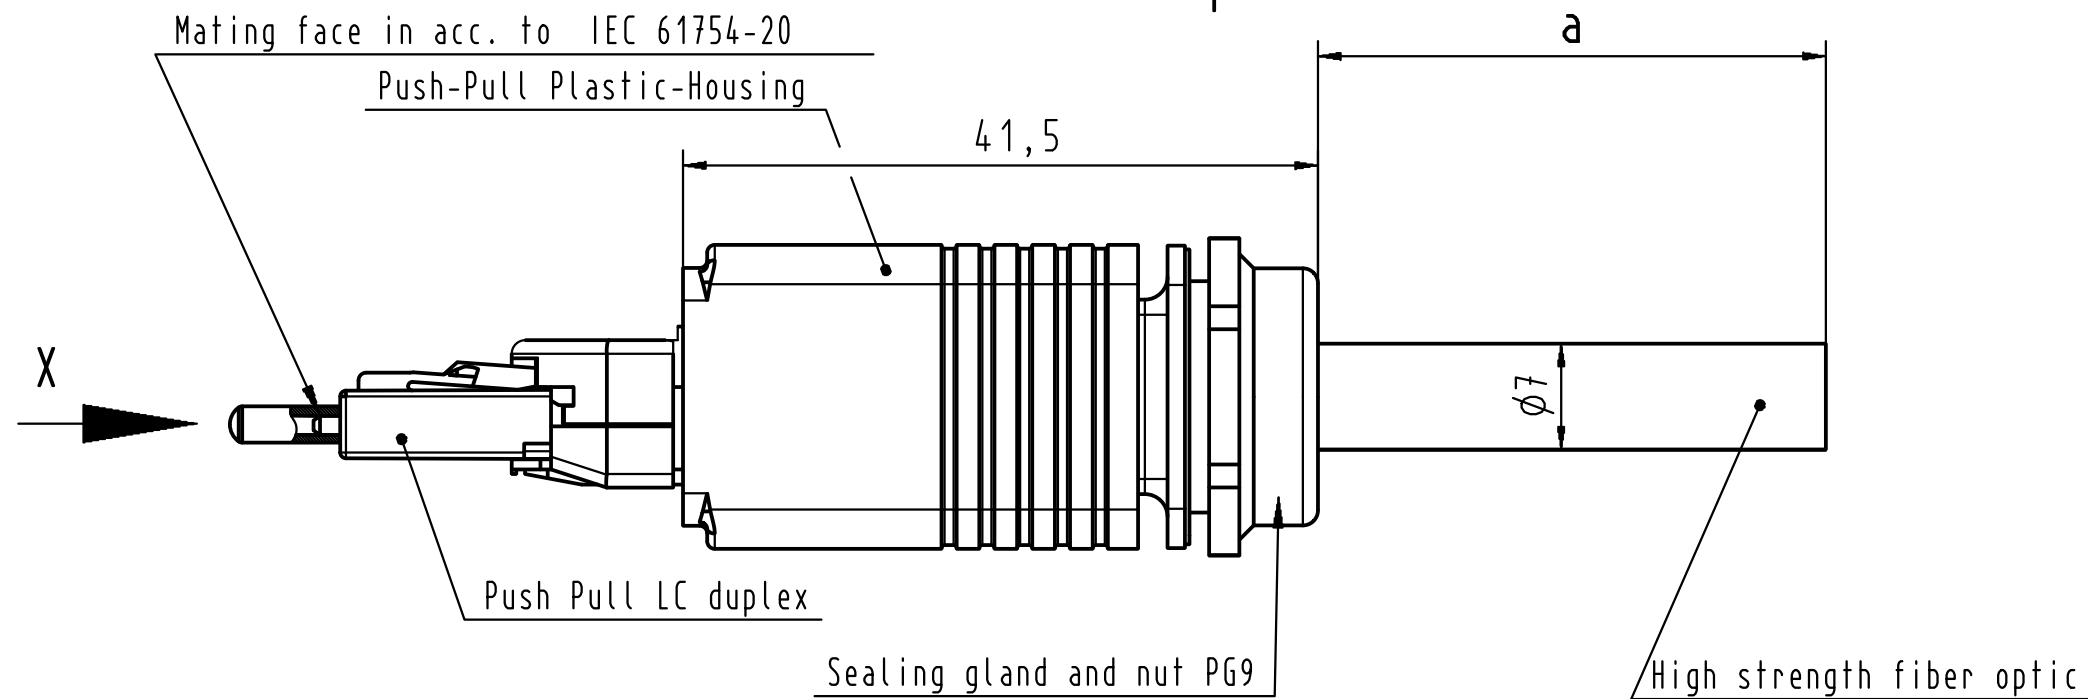

Loading-Plan

A	blue
B	orange

For Information Only
won't be replaced when changed

-Protection level: IP67/65
-Temperature range: -40°C ...+70°C

9	High strength fiber optic breakout cable multimode	33 58 111 300 0001	300 m
8	High strength fiber optic breakout cable multimode	33 58 111 100 0001	100 m
7	High strength fiber optic breakout cable multimode	33 58 111 060 0001	60 m
6	High strength fiber optic breakout cable multimode	33 58 111 050 0001	50 m
5	High strength fiber optic breakout cable multimode	33 58 111 040 0001	40 m
4	High strength fiber optic breakout cable multimode	33 58 111 020 0001	20 m
3	High strength fiber optic breakout cable multimode	33 58 111 010 0001	10 m
2	High strength fiber optic breakout cable multimode	33 58 111 005 0001	5 m
1	High strength fiber optic breakout cable multimode	33 58 111 001 0001	1 m

Cont No.	Type of cable	Part-No.	Dim. a
----------	---------------	----------	--------

 All Dimensions in mm Original Size DIN A 3			Techn. Character.			Nicht tolerierte Maß/Free size tolerances		
				Dat.	Name	Maßstab/Scale 2:1	Push Pull fiber optic assembly 1xPush Pull LC DUPLEX, plastic multimode, 62.5 µm	
			Detail.	05.08.08	MS			
			Insp.					
			Stand.					
35601	17.02.09	MR					TB 33 58 111 xxx 0001	
35025	10.11.08	MS	HARTING Electronics GmbH & Co. KG D-32339 ESPELKAMP					
35008								
Mod.	Dat.	Name					Sub.	Sub