



ACTUAL SIZE



Technical drawing of a 4-hole punch plate. The drawing shows a rectangular plate with four circular holes. Dimensions are provided in inches [millimeters] and parts per thousand (PLS). The overall width is .160 [4.06]. The distance between the centers of the first and second holes is .200 [5.08] (2) PLS. The distance between the centers of the second and third holes is .100 [2.54] (2) PLS. The distance between the center of the third hole and the right edge is .073 [1.85] TYP. The overall height is .042 [1.07]. The hole diameter is Ø.100 [Ø2.54] (4) PLS. The hole spacing is .052 [1.32]. The hole depth is ±.002 [±0.05].

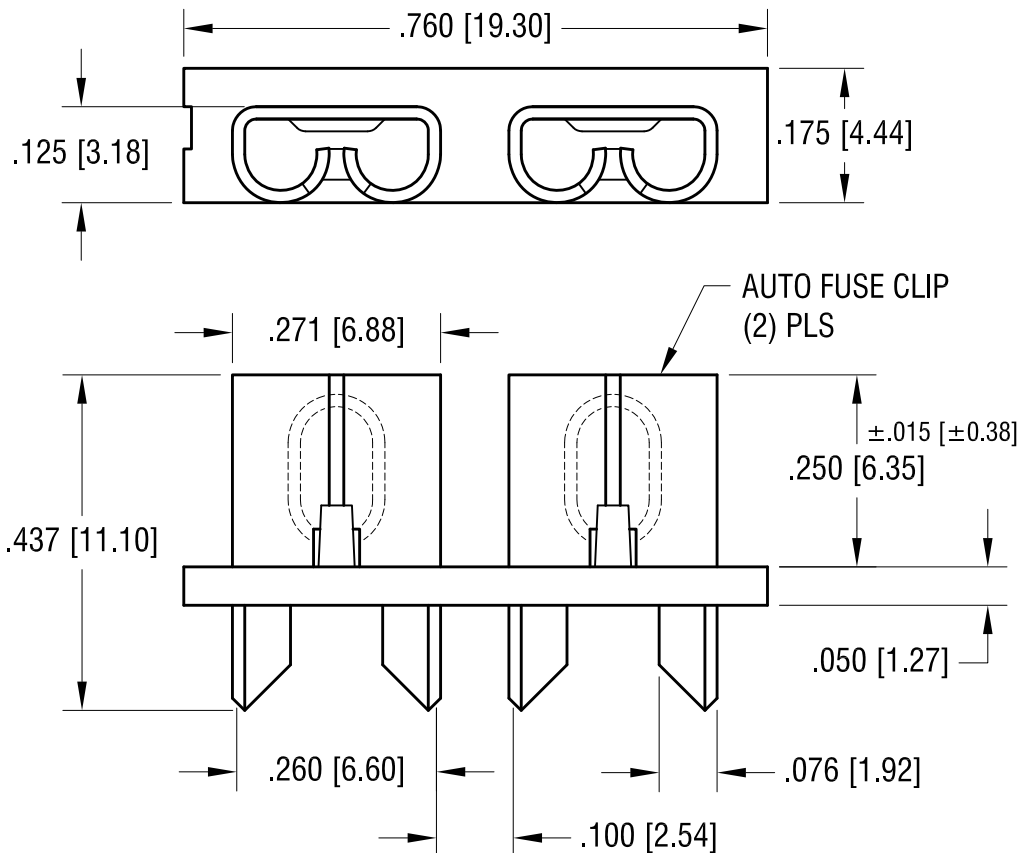

CLIP: .016 [0.40] TH'K BRASS, TIN NICKEL PLATE
BASE: MAT'L: NYLON 66/6, UL 94V-0
CURRENT RATING: 20 AMPS
VOLTAGE RATING: 500VAC
TEMPERATURE RATING: -58°F TO +292°F
(-50°C TO +145°C)

11.03.15	CHANGE AS PER ECN15-130	H
8.18.15	CHANGE AS PER ECN15-079	G
3.0512	CHANGE AS PER ECN 12-029	F
8.18.06	CHANGE AS PER ECN 06-046	E
9.21.04	CHANGE AS PER ECN 04-121	D
DATE	DESCRIPTION	REV.

<h1>KEYSTONE ELECTRONICS CORP.</h1> <p>www.keyelco.com • ASTORIA, N.Y. 11105-2017 • Tel (718) 956-8900</p>			
PART NAME <h2>PC AUTO FUSE SOCKET</h2>			
MATERIAL <h2>AS NOTED</h2>			
FINISH <h2>AS NOTED</h2>		DRN BY <h2>BOONE</h2>	DATE <h2>10.5.92</h2>
		APP'D <h2>LN</h2>	SCALE <h2>4X</h2>
TOLERANCES INCH [MM] DECIMAL $\pm .005$ [± 0.15] ANGULAR $\pm 1^\circ$ UNLESS OTHERWISE SPECIFIED	CODE <h2>C</h2>	DWG NO. <h1>3522-2</h1>	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Keystone Electronics:](#)

[3522-2](#)