


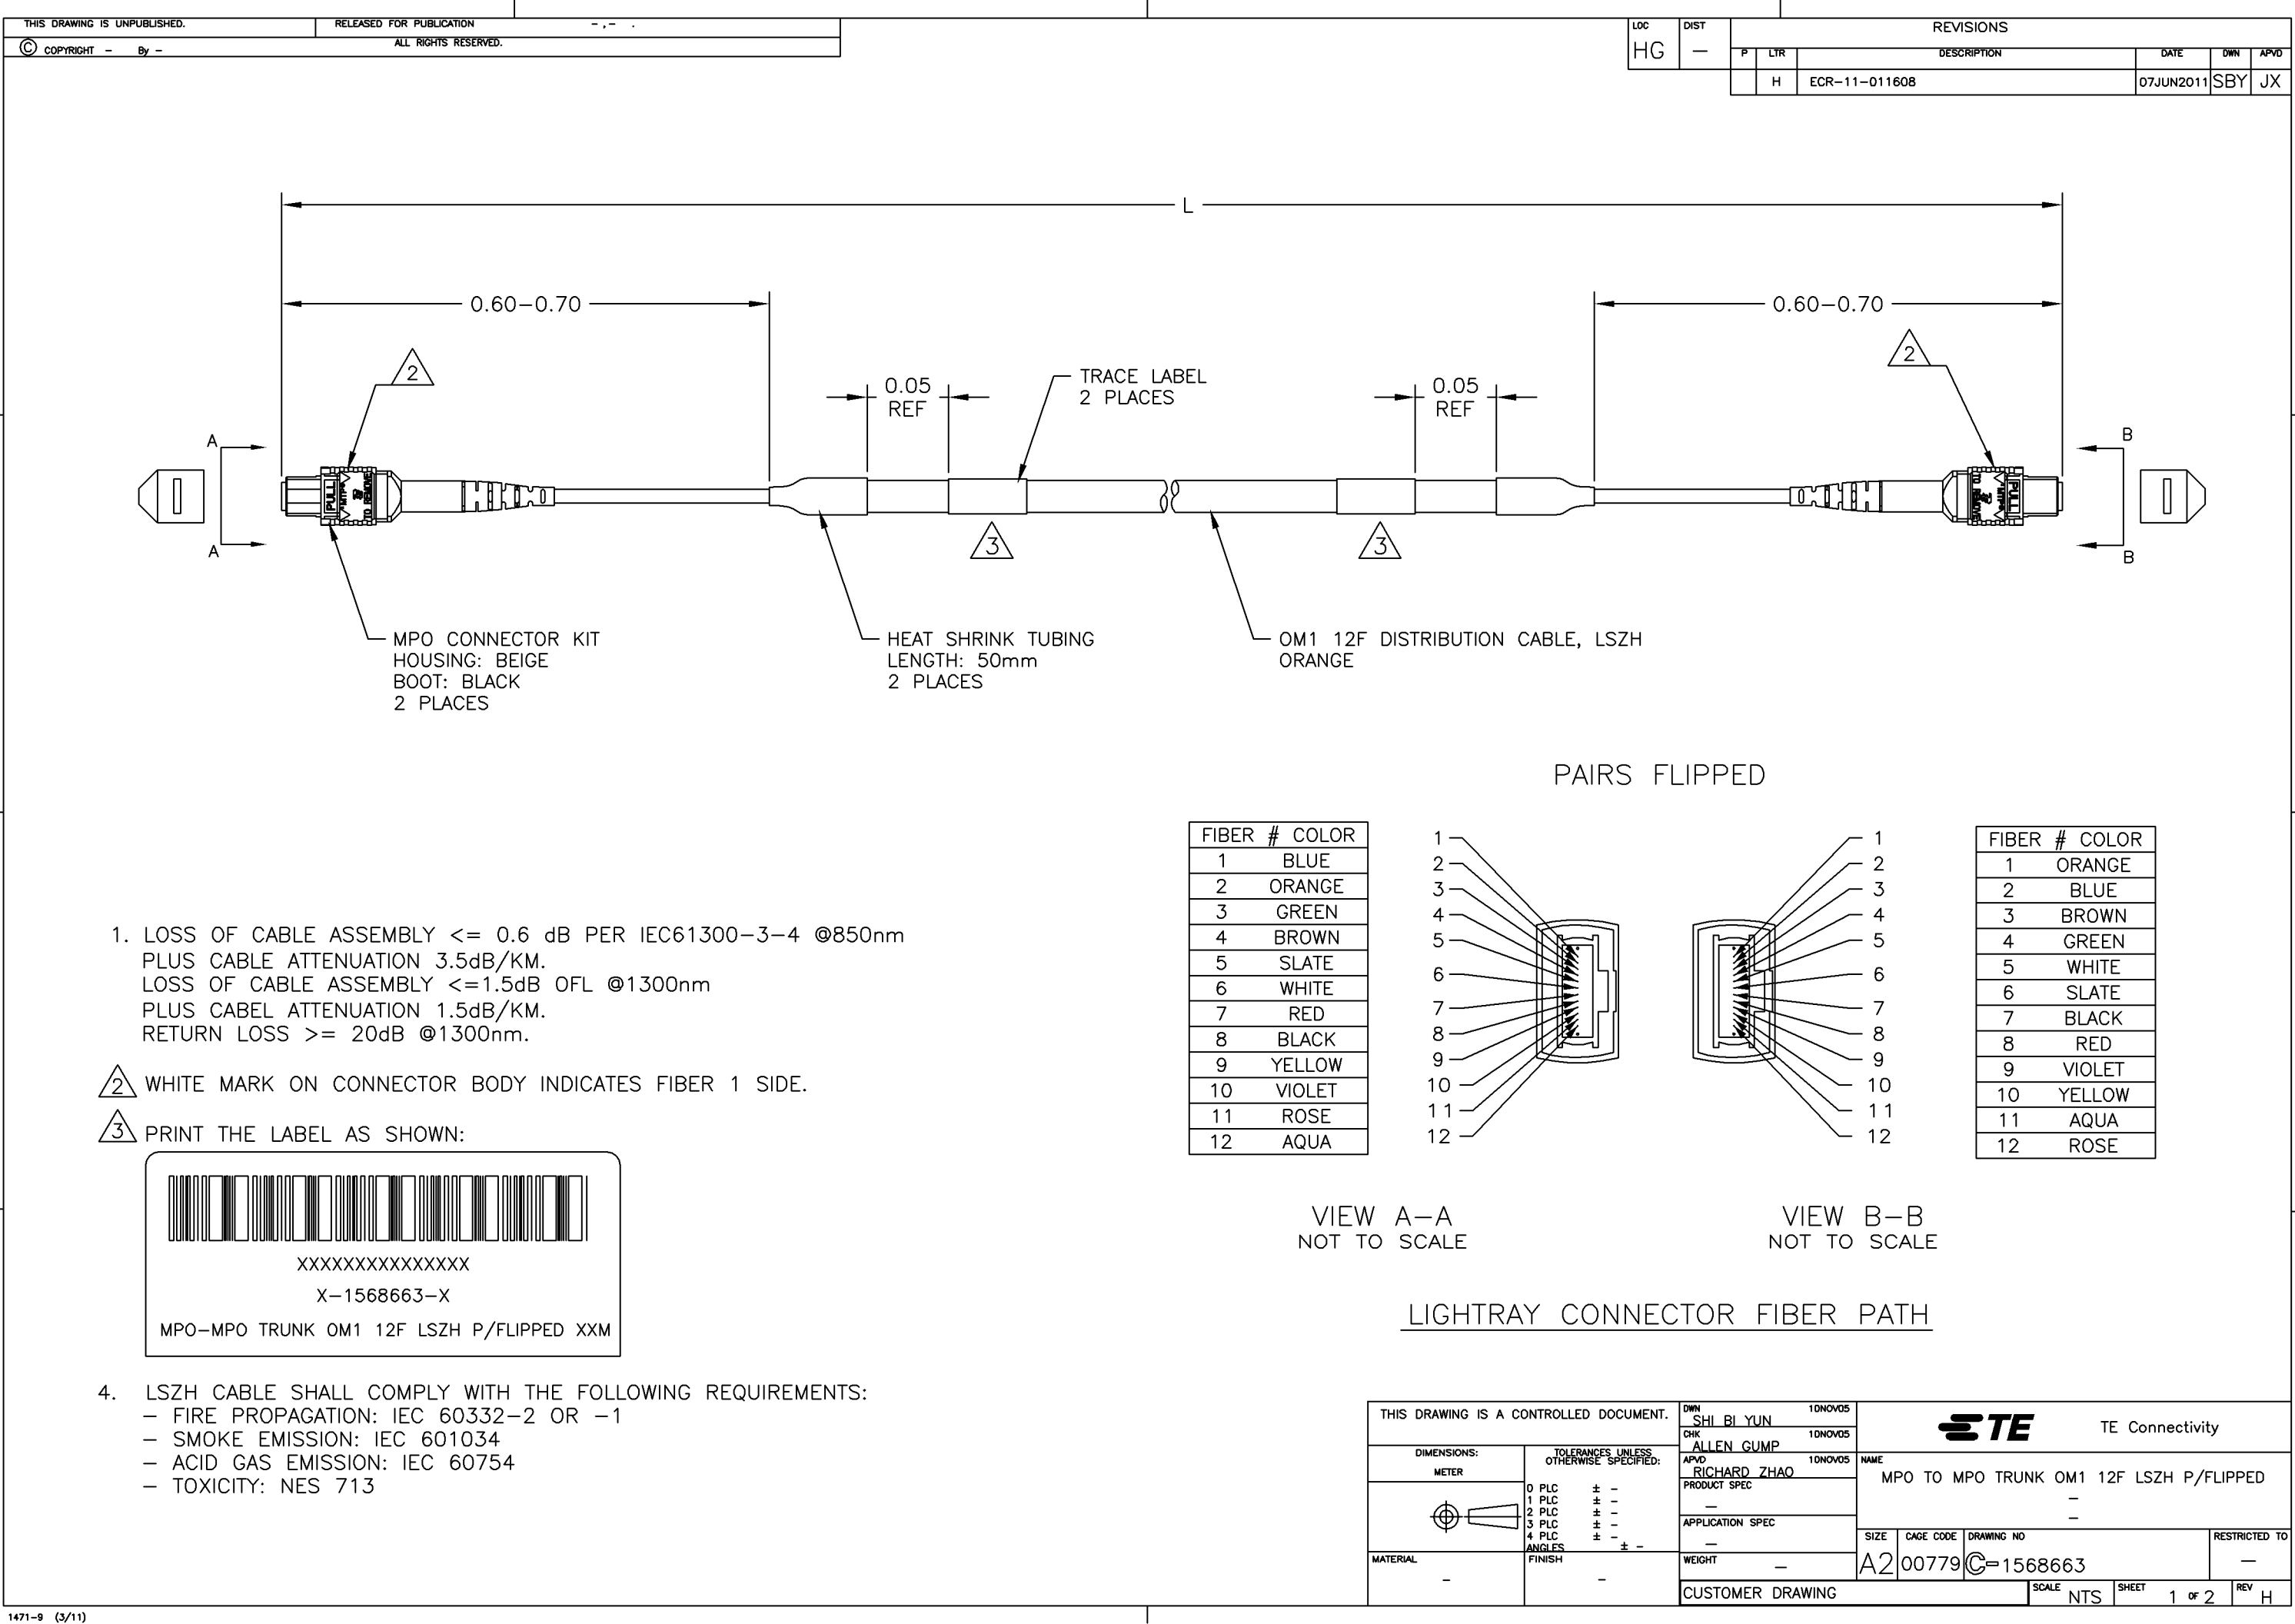

1. LOSS OF CABLE ASSEMBLY ≤ 0.6 dB PER IEC61300-3-4 @850nm
PLUS CABLE ATTENUATION 3.5dB/KM.
LOSS OF CABLE ASSEMBLY ≤ 1.5 dB OFL @1300nm
PLUS CABLE ATTENUATION 1.5dB/KM.
RETURN LOSS ≥ 20 dB @1300nm.


2 WHITE MARK ON CONNECTOR BODY INDICATES FIBER 1 SIDE.

3 PRINT THE LABEL AS SHOWN:


XXXXXXXXXXXXXXXXX
X-1568663-X
MPO-MPO TRUNK OM1 12F LSZH P/FLIPPED XXM

PAIRS FLIPPED

FIBER #	COLOR
1	BLUE
2	ORANGE
3	GREEN
4	BROWN
5	SLATE
6	WHITE
7	RED
8	BLACK
9	YELLOW
10	VIOLET
11	ROSE
12	AQUA

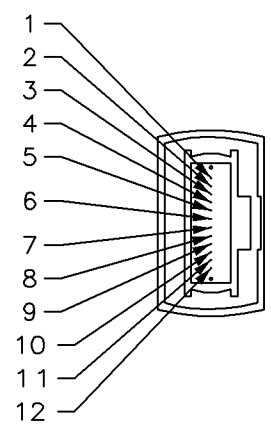

VIEW A-A
NOT TO SCALE

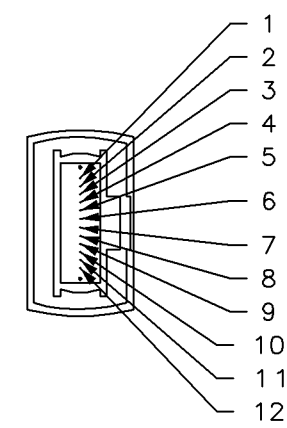

VIEW B-B
NOT TO SCALE

FIBER #	COLOR
1	ORANGE
2	BLUE
3	BROWN
4	GREEN
5	WHITE
6	SLATE
7	BLACK
8	RED
9	VIOLET
10	YELLOW
11	AQUA
12	ROSE

LIGHTRAY CONNECTOR FIBER PATH

4. LSZH CABLE SHALL COMPLY WITH THE FOLLOWING REQUIREMENTS:
- FIRE PROPAGATION: IEC 60332-2 OR -1
 - SMOKE EMISSION: IEC 601034
 - ACID GAS EMISSION: IEC 60754
 - TOXICITY: NES 713

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
METER	0 PLC ± -
	1 PLC ± -
	2 PLC ± -
	3 PLC ± -
	4 PLC ± -
	ANGLES ± -
MATERIAL	FINISH
-	-

DWN	SHI BI YUN	10NOV05
CHK	ALLEN GUMP	10NOV05
APVD	RICHARD ZHAO	10NOV05
PRODUCT SPEC	-	-
APPLICATION SPEC	-	-
WEIGHT	-	-

NAME	MPO TO MPO TRUNK OM1 12F LSZH P/FLIPPED
SIZE	A2
CAGE CODE	00779
DRAWING NO	C-1568663

CUSTOMER DRAWING	SCALE	NTS	SHEET	1 of 2	REV	H
------------------	-------	-----	-------	--------	-----	---

