

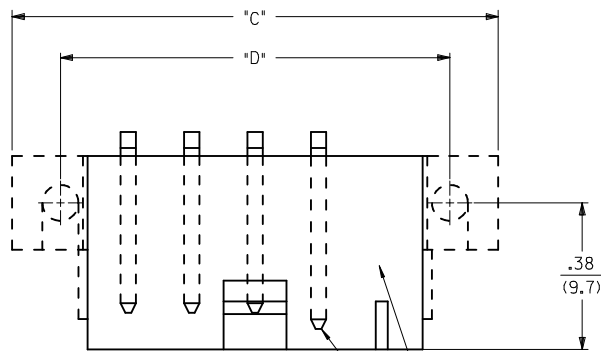


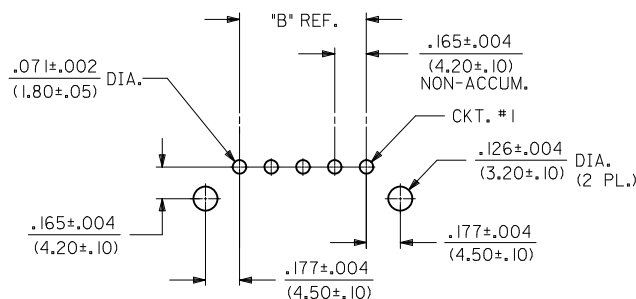

MATE FIRST BREAK LAST OPTION
SEE CHART FOR LOCATION

VOIDED CIRCUIT OPTION
SEE CHART FOR LOCATION

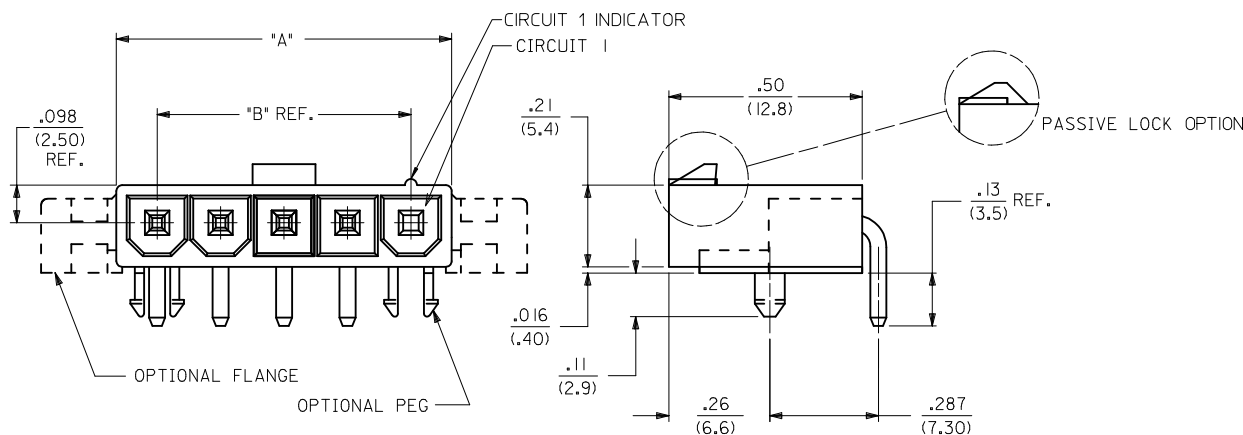


RECOMMENDED HOLE LAYOUT FOR
.070/(1.78) MAX. THICK P.C. BOARD.
VIEWED FROM COMPONENT SIDE
(FLANGE MOUNT)

CIRCUIT SIZE	DIM. "A"	DIM. "B"	DIM. "C"	DIM. "D"
2	.378 (9.60)	.165 (4.20)	.772 (19.60)	.520 (13.20)
3	.543 (13.80)	.331 (8.40)	.937 (23.80)	.685 (17.40)
4	.709 (18.00)	.496 (12.60)	1.102 (28.00)	.850 (21.60)
5	.874 (22.20)	.661 (16.80)	1.268 (32.20)	1.016 (25.80)
6	1.039 (26.40)	.827 (21.00)	1.433 (36.40)	1.181 (30.00)
7	1.205 (30.60)	.992 (25.20)	1.598 (40.60)	1.346 (34.20)
8	1.370 (34.80)	1.157 (29.40)	1.764 (44.80)	1.512 (38.40)
9	1.535 (39.00)	1.323 (33.60)	1.929 (49.00)	1.677 (42.60)
10	1.701 (43.20)	1.488 (37.80)	2.094 (53.20)	1.843 (46.80)
11	1.866 (47.40)	1.654 (42.00)	2.260 (57.40)	2.008 (51.00)
12	2.031 (51.60)	1.819 (46.20)	2.425 (61.60)	2.173 (55.20)

- NOTES:
- MATERIAL:
HOUSING:
A - NYLON 6/6, UL 94V-2, COLOR: NATURAL
B - NYLON 6/6, UL 94V-0, COLOR: NATURAL
TERMINALS: BRASS
 - FINISH (TERMINAL PLATING):
A - .000200/(.00508) MIN. BRIGHT TIN OVER
.000100/(.00254) MIN. COPPER OVERALL.
B - .000030/(0.00076) MIN. SELECT GOLD AND
.000100/(0.00254) MIN. SELECT MATTE TIN
OVER .000050/(0.00127) MIN. NICKEL OVERALL.
C - .000100/(.00254) MIN. BRIGHT TIN OVER
.000050/(.00127) MIN. NICKEL OVERALL.
 - PRODUCT SPECIFICATION: PS-5556-001
 - PACKAGING: BULK PACKAGED PER PK-5569-002
 - PART MATES WITH MINI-FIT JR. RECEPTACLE #5557.
 - MOUNTING OPTIONS:
1 - PEGS
2 - FLANGES
 - LOCK RAMP STYLES:
1 - POSITIVE LOCK
2 - PASSIVE LOCK
 - PARTS ARE NOT TO BE MATED OR UNMATED WHILE
CIRCUITS ARE LIVE.
 - PART IS NOT DESIGNED FOR CURRENT SHARING.
 - PART CONFORMS TO CLASS "B" REQUIREMENTS OF
COSMETIC SPECIFICATION PS-45499-002.

2	B7
1	B9
SHEET	REV

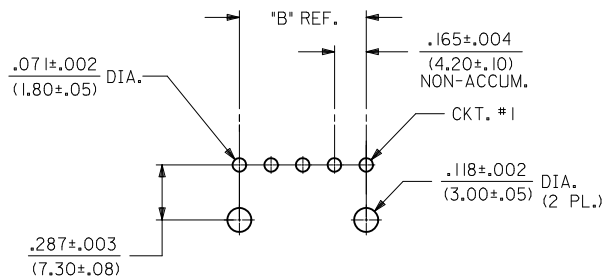

RECOMMENDED HOLE LAYOUT FOR
.070/(1.78) MAX. THICK P.C. BOARD.
VIEWED FROM COMPONENT SIDE
(PEG MOUNT)

UPDATED LINE TYPE EC NO: UCP2010-2674 DRWN: JAGUILAR 2010/04/19 CHKD: 2010/04/19 1993/02/01 APPR: FSMITH 2010/04/22	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED) mm INCH 4 PLACES ± --- ± --- 3 PLACES ± --- ± .015 2 PLACES ± 0.38 ± --- 1 PLACE ± --- ± --- ANGULAR ± 1/2°	DIMENSION STYLE IN/MM DRAWN BY DATE POLGAR 1993/02/01 CHECKED BY DATE FRY 1993/02/01 APPROVED BY DATE FRY 1993/02/01	SCALE 4:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	MINI-FIT JR. SINGLE ROW HEADER WITH MF/BL AND VOIDED CIRCUITS OPTION	
							MOLEX INCORPORATED	
							DOCUMENT NO. SDA-43232-*	
							SHEET NO. 1 OF 2	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS								
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION								

[illegible]