


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION ,19 .  
 © COPYRIGHT 19 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

PROD 4092 CODE	LOC DF	DIST 50	REVISIONS						
			P	F	ZONE	LTR	DESCRIPTION	DATE	APPD
					C	REV & REDRAWN PER DF-2186	CT	DE	11-89
					D	ADD -5 PER DF-3825	CT	DE	11-89
					E	REV PER 0600-3638-95	TT	DE	04-95

1. TOLERANCE OF LEAD LENGTH:  
 UP TO 24 INCHES [609.6] = ±.12 [±3.1]  
 24 INCHES [609.6] & UP = ±1%
2. MARKED PER MIL-STD-130.
3. TO MATE WITH AMP LGH-1/2  
 RECEPTACLE WITH .89 BARREL DEPTH.
4. INSULATION CUT BUT NOT REMOVED.
5. OPERATING VOLTAGE: 15 KVDC AT 0 TO 70,000 FEET, -55°C TO 125°C.

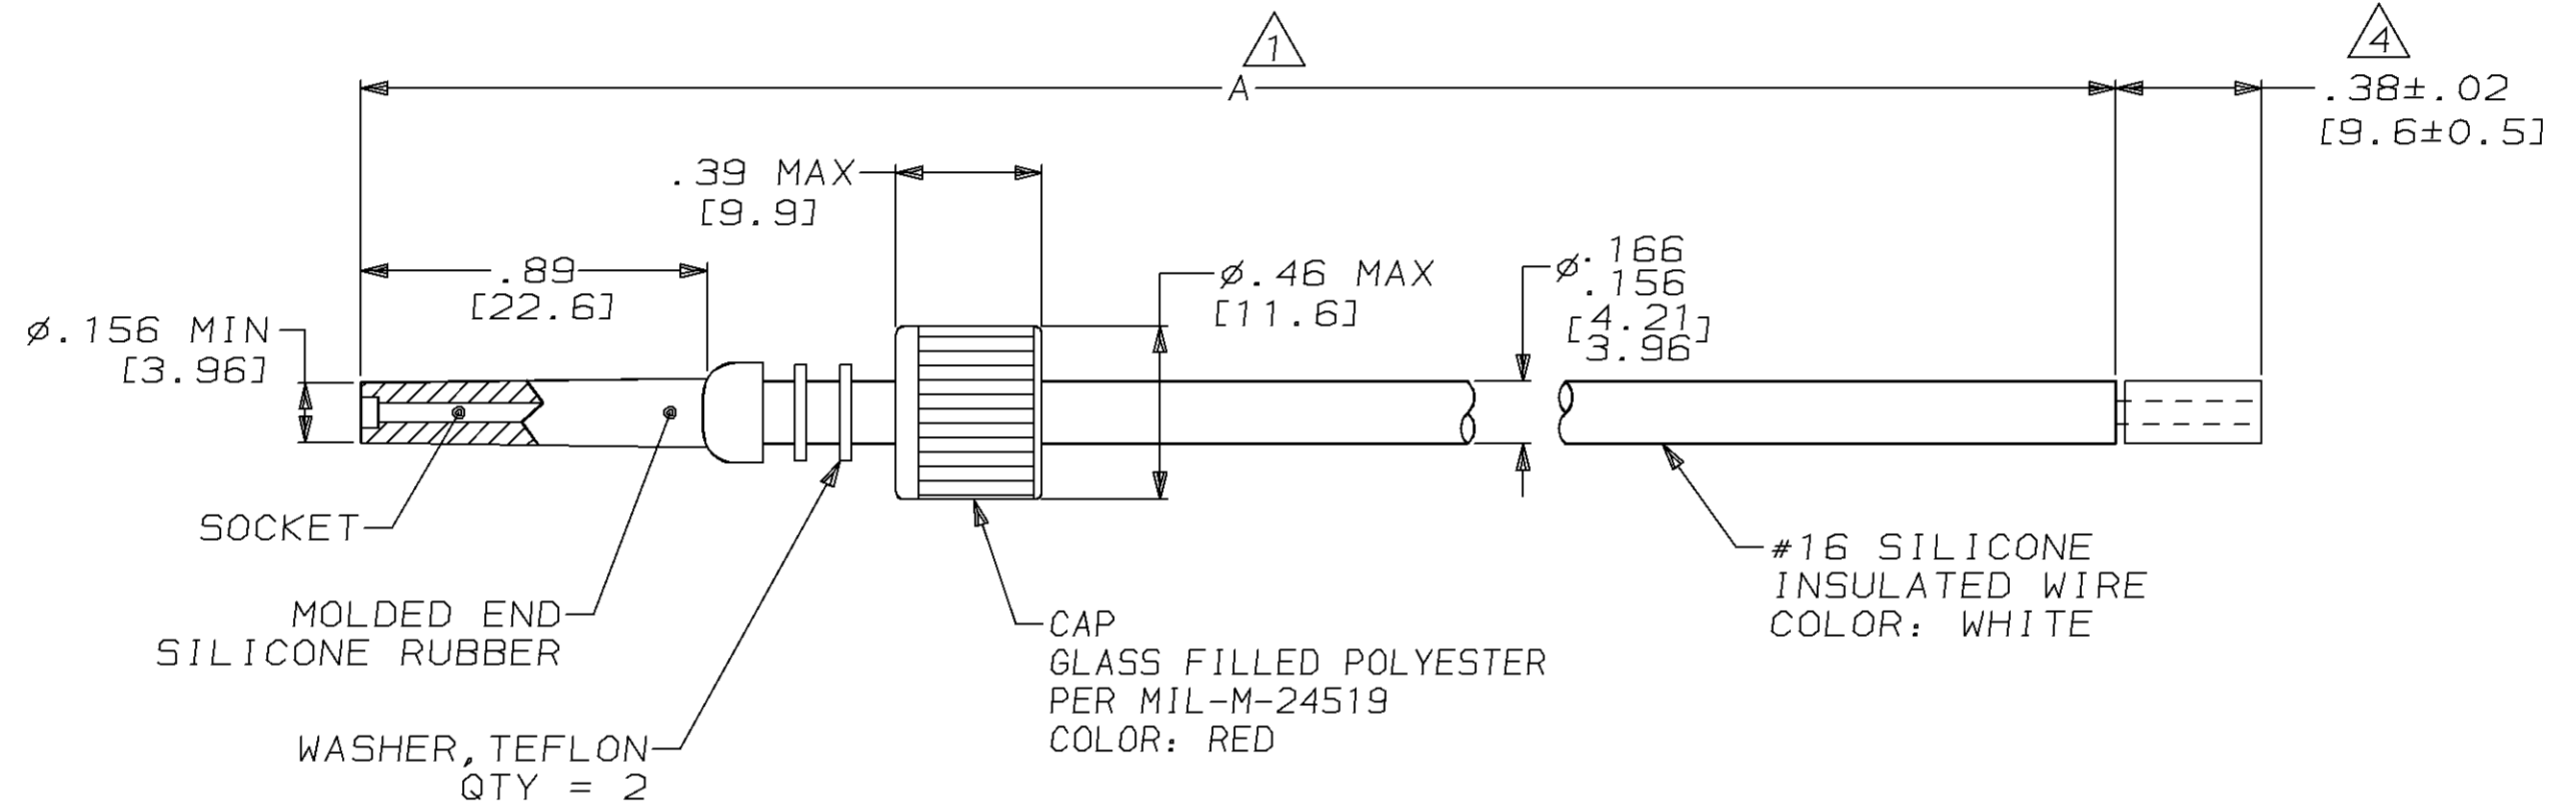

14.00	[355.6]	445245-5
13.00	[330.2]	445245-4
12.00	[304.8]	445245-3
19.00	[482.6]	445245-2
16.00	[406.4]	445245-1

A PART NO.

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN INCHES [mm] TOLERANCES ON : 2 PLC DEC ± .02 [0.5] 3 PLC DEC ± - ANGLES ± -	DR 11-14-89 C.C. THOMAS	AMP INCORPORATED Harrisburg, Pa. 17105		
	CHK 11-29-89 D.EABY			
MATERIAL SEE CALLOUTS	APPD 11-29-89 D.EABY	LEAD ASS'Y, SGL. END, LGH-1/2L		
FINISH -	APPD 11-29-89 CHUCK THOMAS			
	PRODUCT SPEC -	SIZE <b>C</b>	CAGE CODE 00779	DRAWING NO 445245
	APPLICATION SPEC -	SCALE 2:1	SHEET 1 OF 1	
	WEIGHT -			

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[445245-4](#)