

Series
45
Catalogue

www.eao.com



Expert manufacturers.

EAO creates possibilities. Since 1947.



Founding year: 1947

Number of employees: 600

Headquarters: Olten, Switzerland

Manufacturing Companies: Switzerland,
Germany, North America, China

Sales Companies: 11

Distribution countries: 50

Core markets: Transportation, Automotive,
Heavy Duty & Special Vehicles, Machinery

EAO AG, a Swiss, family-owned company founded in 1947, has developed into one of the world's leading manufacturers of high-quality industrial switches, complete custom HMI panels and interface systems, and specialised automotive switch systems.

Efficient and modern development processes, effective global supply chains and skilled project and consultation management represent additional services that we offer our customers and business partners around the world.

Your solution-focused expert and partner

We do much more than just manufacture individual control elements. As a solution-focused partner, we provide the option of technically and mechanically customizing existing HMI Components in line with our customers' individual requirements. From simple control elements through to sophisticated HMI Systems, from serial production through to installation – we offer the entire range of HMI services and inspire the confidence of our customers.

Customer-oriented.

More than an expert, a partner.



Being close to customers and able to offer a comprehensive range of services are fundamental to our success and at the core of our corporate policy.

EAO's production sites in Switzerland, Germany, North America and China combine volume production, development, research, and logistics. In addition to these centres of competence, EAO has 11 sales companies around the world at its disposal.

Thanks to this comprehensive network and our 50 distribution companies in the major industrialized countries, EAO is represented wherever interactions between humans and machines play key roles.


Control. *For every application.*

Operator Device

Actuators and indicators for controlling specific and basic machine functions.

Handheld Control Unit

HMI solutions for mobile control units.

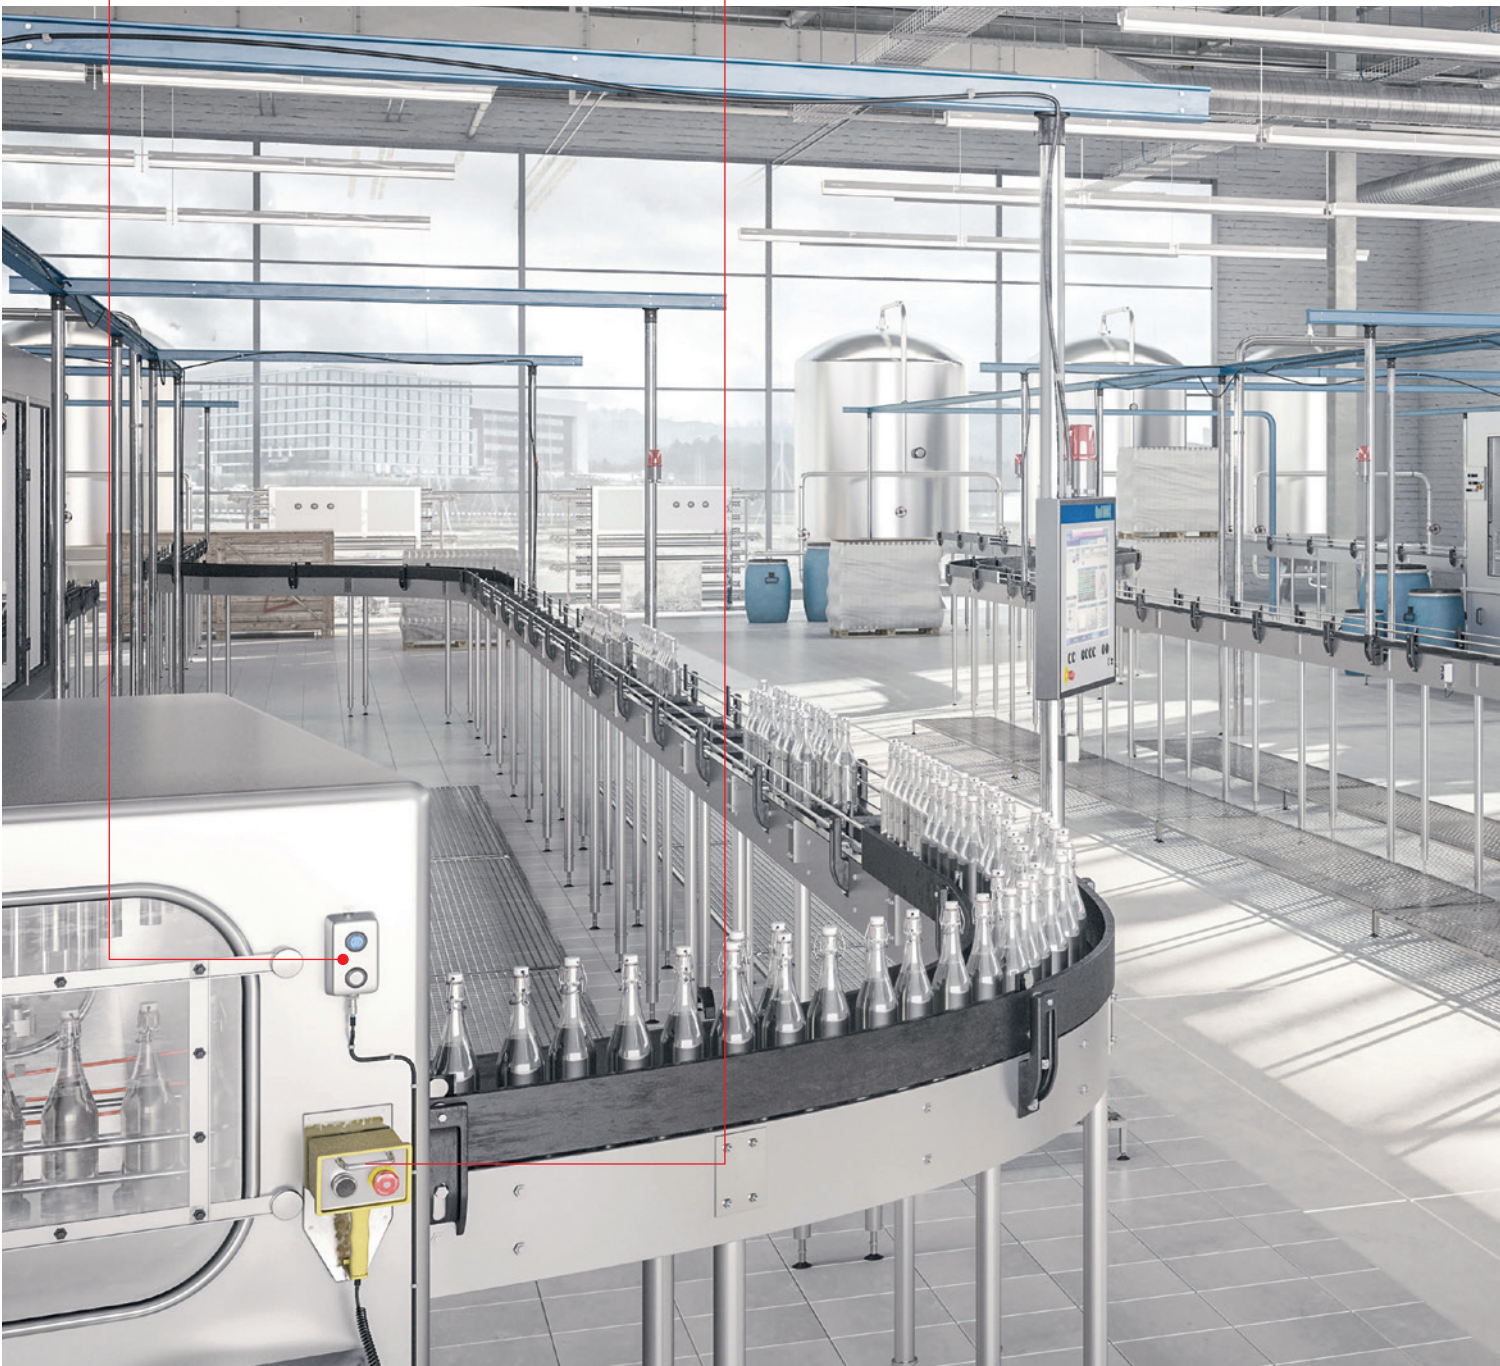

Regardless of the industrial demands placed on our HMI Components and Systems, reliability, longevity, intuitive operation and safety are always at the heart of our products and solutions. Our aim is to provide control over these processes and to afford machine operators the greatest possible level of protection at all times.

Main Operator Panel

HMI Components and Systems for main control units for the overall control of machinery.



Series 45.

Modular, aesthetic and robust in use.



Innovative and comprehensive *Series 45*

EAO's Series 45 unites an extremely broad range of machine operating functions with outstanding technical properties. Penetration by dust and liquids is prevented even under the most adverse conditions.

Robust industrial control system

Resistant to aggressive cleaning agents, oils, dyes and other chemical substances, the actuators and indicators of the new Series 45 work perfectly each and every time. Our HMIs literally keep their cool in the face of high humidity and extreme fluctuations in temperature. Functionality is preserved even when the control units are subjected to dust or water at high pressures (IP69K). Series 45 is ideal for use in the most adverse conditions.

High level of modularity

Their modular construction ensures that our HMI Components all operate smoothly with each other. They are straightforward to install and can also be integrated easily into decentralised systems.

Full functionality

Every conceivable HMI function can be performed by products from Series 45. Pushbuttons, illuminated pushbuttons, indicators, selector switches, keylock switches, toggle sticks and emergency stop switches are capable of handling all major functions.

Major benefits

- Comprehensive Series
- Easy to use, modular construction and rapid assembly without special tools
- Rugged in use; IP69K front protection and metal models
- Modern design thanks to flush mounting, attractive illumination and metallic or plastic appearance
- Low energy consumption thanks to LEDs
- Long service life (up to 10 million switching cycles)

Overview

Numbering structure	8
Flush design	
Indicator	20
Pushbutton	21
Illuminated pushbutton	23
Keylock switch	25
Selector switch	26
Raised design	
Indicator	34
Pushbutton	38
Illuminated pushbutton	49
Double pushbutton	57
Double pushbutton illuminated	59
Emergency stop switch	61
Emergency stop switch illuminated	63
Stop switch	65
Mushroom-head pushbutton	67
Keylock switch	86
ID keylock switch	90
Selector switch	91
Potentiometer	110
Toggle stick	112
Toggle switch	114
Accessories	115
Drawings	149
Technical data	158
Marking	167
Application guidelines	174
Index	175

45 Numbering structure

Indicator

45 - 2 T XX . X X X 0 . 0 0 0

Actuator

T = Indicator

Function

00 = Full face illumination

07 = Front illumination

Material

1 = Plastic

2 = Metal

3 = Metal/plastic

4 = Metal/matt

Shape of handle or front ring

F = flush

0 = raised

Colour

E = red transparent

F = amber transparent

G = yellow transparent

H = green transparent

J = blue transparent

K = colourless transparent

N = white transparent

Pushbutton

45 - 2 1 XX . X X X 0 . 0 0 0

Actuator

1 = Pushbutton

Function

31 = 2 positions, momentary

34 = 2 positions, maintain, push to release

Material

1 = Plastic

2 = Metal

3 = Metal / plastic

4 = Metal / matt

Shape of handle or front ring

1 = raised / lens level with front ring

2 = raised / lens raised above front ring

3 = raised / lens lower than front ring

4 = raised / lens lower than front ring, with castallations

F = flush

Colour

1 = black

2 = red

4 = yellow

5 = green

6 = blue

8 = grey

9 = white

K = clear transparent

45 Numbering structure

Double pushbutton, Double pushbutton illuminated

45 - 2 X XX . X X X 0 . 0 0 0

Actuator

J = Double pushbutton

K = Double pushbutton illuminated

Function

31 = 2 positions, momentary

Material

1 = Plastic

2 = Metal

3 = Metal/plastic

Shape of handle

5 = 2 lenses level with front ring

6 = lens level with front ring/ lens level raised above front ring

Colour

T = green/red

V = white/black

Illuminated pushbutton

45 - 2 2 XX . X X X 0 . 0 0 0

Actuator

2 = Illuminated pushbutton

Function

31 = 2 positions, momentary

34 = 2 positions, maintain, push to release

Material

1 = Plastic

2 = Metal

3 = Metal/plastic

4 = Metal/matt

Shape of handle or front ring

1 = raised/lens level with front ring

2 = raised/lens raised above front ring

4 = raised/lens lower than front ring, with castallations

F = flush

Colour

E = red transparent

F = amber transparent

G = yellow transparent

H = green transparent

J = blue transparent

K = colourless transparent

N = white transparent

45 Numbering structure

Emergency stop switch

[illegible]

Stop switch

	45 -	2	7	XX	.	X	X	X	0	.	0	0	0
Actuator													
7 = Stop switch													
Function													
36 = Twist to release													
Material													
1 = Plastic													
2 = Metal													
Shape of handle or front ring													
9 = Diameter 40mm													
Colour													
1 = black													

45 Numbering structure

Mushroom-head pushbutton

45 - 2 X XX . X X X 0 . 0 0 0

Actuator

5 = Mushroom-head pushbutton

6 = Mushroom-head pushbutton, illuminated

Function

30 = 2 positions, maintain, pull release

31 = 2 positions, momentary

32 = 3 positions, maintain/momentary, pull release

Material

1 = Plastic

2 = Metal

3 = Metal/plastic

Shape of handle or front ring

8 = Diameter 30 mm

9 = Diameter 40 mm

A = Diameter 60 mm

Colour

1 = black

2 = red

4 = yellow

5 = green

Keylock switch

45 - 2 9 XX . X X 0 0 . X X X

Actuator

9 = Keylock switch

Function

0C = 3 positions, maintain, key remove L/R

0D = 3 positions, maintain, key remove L

0F = 3 positions, maintain, key remove L/C/R

0G = 3 positions, maintain, key remove L/C

0H = 2 positions, maintain, key remove L/R

0J = 2 positions, maintain, key remove L

0K = 2 positions, maintain, key remove L

0Z = 3 positions, maintain, key remove C

11 = 3 positions, momentary/maintain, key remove C

17 = 3 positions, maintain, key remove R

22 = 3 positions, maintain/momentary, key remove C

24 = 3 positions, maintain, key remove C

25 = 2 positions, maintain, key remove R

Material

1 = Plastic

2 = Metal

3 = Metal/plastic

4 = Metal/matt

Shape of handle or front ring

F = flush

0 = raised

Lock System

1 = RONIS

Key

1 = T254

Angle

1 = 90° (V-Pos)

3 = 2x45° (V-Pos)

6 = 45° (0-Pos.12 o'clock)

45 Numbering structure

Selector switch

45 - 2 8 XX . X X X 0 . 0 0 X

Actuator

8 = Selector switch

Function

0S = 3 positions, momentary

0X = 3 positions, momentary L, maintain R

16 = 3 positions, momentary R, maintain L

19 = 3 positions, maintain

28 = 2 positions, maintain

44 = 2 positions, momentary

45 = 4 positions, Maintain, (0-Position 15 h/18 h/21 h/12 h)

Material

1 = Plastic

2 = Metal

3 = Metal/plastic

4 = Metal/matt

Shape of handle or front ring

C = short lever

D = long lever

E = round lever

Colour

2 = red

4 = yellow

5 = green

6 = blue

9 = white

Angle

1 = 90° (V-Pos)

2 = 4x90°

3 = 2x45° (V-Pos)

6 = 45° (0-Pos.12 o'clock)

Potentiometer

45 - 2 P XX . X X X 0 . 0 0 0

Actuator

P = Potentiometer

Function

01 = 100kOhm

02 = 10kOhm

03 = 1kOhm

04 = 4.7kOhm

05 = 470kOhm

06 = 47kOhm

Material

1 = Plastic

2 = Metal

Shape of handle or front ring

E = round lever

Colour

1 = black

45 Numbering structure

Toggle stick

45 - 2 F XX . X X X 0 . 0 0 0

Actuator

F = Toggle stick

Function

0T = 2 positions, momentary, L/R

0V = 4 positions, momentary, L/R/U/D

13 = 2 positions, momentary, L/R, lockable C

14 = 4 positions, momentary, L/R/U/D, lockable C

20 = 2 positions, maintain, L/R

21 = 4 positions, maintain, L/R/U/D

26 = 2 positions, maintain, L/R, lockable C

27 = 4 positions, maintain, L/R/U/D, lockable C

38 = 2 positions, momentary U/D

40 = 2 positions, momentary, U/D, lockable C

41 = 2 positions, maintain, U/D

43 = 2 positions, maintain, U/D, lockable

Material

1 = Plastic

2 = Metal

3 = Metal/plastic

Colour

1 = black

Toggle switch


	45 -	2	N	XX	.	X	0	1	0	.	0	0	0
Actuator													
N = Toggle switch													
Funktion													
39 = 2 positions, momentary													
42 = 2 positions, maintain													
Material													
1 = Plastic													
2 = Metal													
3 = Metal/plastic													

45 Flush design

Indicator, IP66, IP67, IP69K




Product can differ from the current configuration.

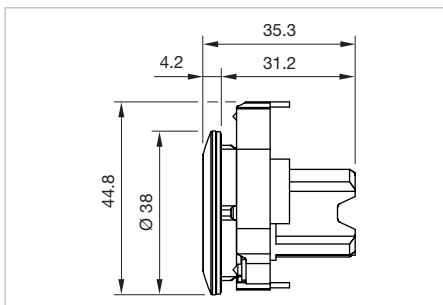

Dimensions [mm]


Additional Information

- Mounting depth incl. front plate, see chapter «drawings»
- Front panel thickness 1 ... 6 mm

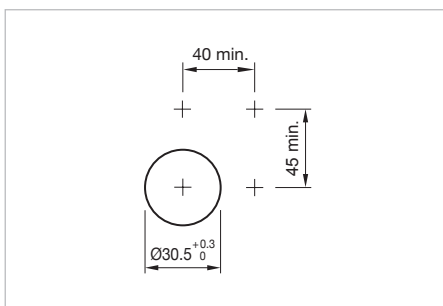


Mounting cut-outs [mm]

Equipment consisting of (schematic overview)




Actuator



Holder

page 134



Illumination element

page 138


Each Part Number listed below includes all the black components shown in the 3D-drawing.

To obtain a complete unit, please select the red components from the pages shown.


LED colour	Front ring	Lens cap	Part No.	Weight
 Indicator actuator, Front dimension Ø 38 mm				
red	Metal sandgrey	Plastic red transparent	45-2T07.4FE0.000	0.048 kg
 Indicator actuator, Front dimension Ø 38 mm				
yellow	Metal sandgrey	Plastic yellow transparent	45-2T07.4FG0.000	0.048 kg
 Indicator actuator, Front dimension Ø 38 mm				
green	Metal sandgrey	Plastic green transparent	45-2T07.4FH0.000	0.048 kg
 Indicator actuator, Front dimension Ø 38 mm				
blue	Metal sandgrey	Plastic blue transparent	45-2T07.4FJ0.000	0.048 kg
 Indicator actuator, Front dimension Ø 38 mm				
white	Metal sandgrey	Plastic colourless transparent	45-2T07.4FK0.000	0.048 kg

Pushbutton, IP66, IP67, IP69K

Equipment consisting of (schematic overview)




Actuator



Holder

page 134





Switching element

page 136

Each Part Number listed below includes all the black components shown in the 3D-drawing.

To obtain a complete unit, please select the red components from the pages shown.

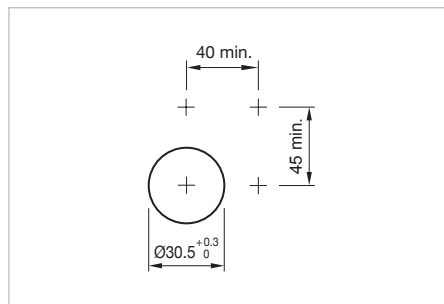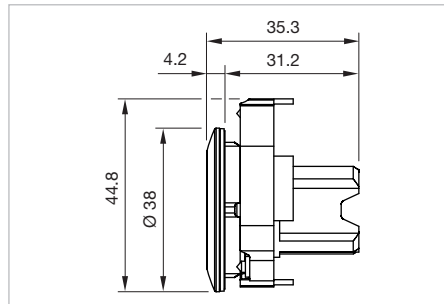

Product can differ from the current configuration.

Additional Information

- Mounting depth incl. front plate, see chapter «drawings»
- Front panel thickness 1 ... 6 mm

Front ring	Lens	Switching action	Part No.	Wiring diagram	Weight
Pushbutton actuator, Momentary, Front dimension Ø 38 mm					
Metal sandgrey	Plastic black	B	45-2131.4F10.000	1	0.048 kg
Pushbutton actuator, Momentary, Front dimension Ø 38 mm					
Metal sandgrey	Plastic red	B	45-2131.4F20.000	1	0.048 kg
Pushbutton actuator, Momentary, Front dimension Ø 38 mm					
Metal sandgrey	Plastic yellow	B	45-2131.4F40.000	1	0.048 kg
Pushbutton actuator, Momentary, Front dimension Ø 38 mm					
Metal sandgrey	Plastic green	B	45-2131.4F50.000	1	0.048 kg
Pushbutton actuator, Momentary, Front dimension Ø 38 mm					
Metal sandgrey	Plastic blue	B	45-2131.4F60.000	1	0.048 kg

45 Flush design


Front ring	Lens	Switching action	Part No.	Wiring diagram	Weight
	Pushbutton actuator, Momentary, Front dimension Ø 38 mm				
Metal sandgrey	Plastic white	B	45-2131.4F90.000	1	0.048 kg
	Pushbutton actuator, Maintain, Front dimension Ø 38 mm				
Metal sandgrey	Plastic black	C	45-2134.4F10.000	2	0.048 kg
	Pushbutton actuator, Maintain, Front dimension Ø 38 mm				
Metal sandgrey	Plastic red	C	45-2134.4F20.000	2	0.048 kg
	Pushbutton actuator, Maintain, Front dimension Ø 38 mm				
Metal sandgrey	Plastic yellow	C	45-2134.4F40.000	2	0.048 kg
	Pushbutton actuator, Maintain, Front dimension Ø 38 mm				
Metal sandgrey	Plastic green	C	45-2134.4F50.000	2	0.048 kg
	Pushbutton actuator, Maintain, Front dimension Ø 38 mm				
Metal sandgrey	Plastic blue	C	45-2134.4F60.000	2	0.048 kg
	Pushbutton actuator, Maintain, Front dimension Ø 38 mm				
Metal sandgrey	Plastic white	C	45-2134.4F90.000	2	0.048 kg

Switching action: B = Momentary, C = Maintain


E---	E~--
Wiring diagram 1	Wiring diagram 2

Illuminated pushbutton, IP66, IP67, IP69K

Equipment consisting of (schematic overview)



Actuator




Holder

page 134



Switching element

page 136




Illumination element


page 138

Each Part Number listed below includes all the black components shown in the 3D-drawing.

To obtain a complete unit, please select the red components from the pages shown.

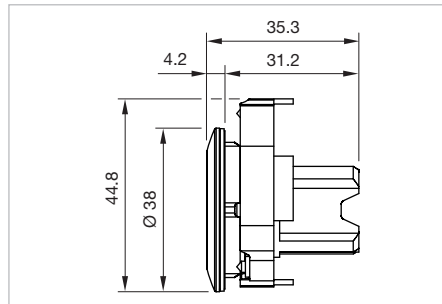

Dimensions [mm]

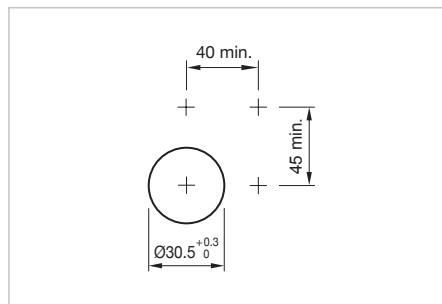

Mounting cut-outs [mm]



Product can differ from the current configuration.

Additional Information

- Mounting depth incl. front plate, see chapter «drawings»
- Front panel thickness 1 ... 6 mm

LED colour	Front ring	Lens	Switching action	Part No.	Wiring diagram	Weight
 Illuminated pushbutton actuator, Momentary, Front dimension Ø 38 mm						
red	Metal sandgrey	Plastic red transparent	B	45-2231.4FE0.000	1	0.048 kg
 Illuminated pushbutton actuator, Momentary, Front dimension Ø 38 mm						
yellow	Metal sandgrey	Plastic yellow transparent	B	45-2231.4FG0.000	1	0.048 kg
 Illuminated pushbutton actuator, Momentary, Front dimension Ø 38 mm						
green	Metal sandgrey	Plastic green transparent	B	45-2231.4FH0.000	1	0.048 kg
 Illuminated pushbutton actuator, Momentary, Front dimension Ø 38 mm						
blue	Metal sandgrey	Plastic blue transparent	B	45-2231.4FJ0.000	1	0.048 kg
 Illuminated pushbutton actuator, Momentary, Front dimension Ø 38 mm						
white	Metal sandgrey	Plastic colourless transparent	B	45-2231.4FK0.000	1	0.048 kg

45

Flush design


LED colour	Front ring	Lens	Switching action	Part No.	Wiring diagram	Weight
 Illuminated pushbutton actuator, Maintain, Front dimension Ø 38 mm						
red	Metal sandgrey	Plastic red transparent	C	45-2234.4FE0.000	2	0.048 kg
 Illuminated pushbutton actuator, Maintain, Front dimension Ø 38 mm						
yellow	Metal sandgrey	Plastic yellow transparent	C	45-2234.4FG0.000	2	0.048 kg
 Illuminated pushbutton actuator, Maintain, Front dimension Ø 38 mm						
green	Metal sandgrey	Plastic green transparent	C	45-2234.4FH0.000	2	0.048 kg
 Illuminated pushbutton actuator, Maintain, Front dimension Ø 38 mm						
blue	Metal sandgrey	Plastic blue transparent	C	45-2234.4FJ0.000	2	0.048 kg
 Illuminated pushbutton actuator, Maintain, Front dimension Ø 38 mm						
white	Metal sandgrey	Plastic colourless transparent	C	45-2234.4FK0.000	2	0.048 kg

Switching action: B = Momentary, C = Maintain


	
Wiring diagram 1	Wiring diagram 2

Keylock switch 2 and 3 positions, IP66, IP67, IP69K

Equipment consisting of (schematic overview)



Actuator




Holder *page 134*



Switching element *page 136*

Each Part Number listed below includes all the black components shown in the 3D-drawing.


To obtain a complete unit, please select the red components from the pages shown.

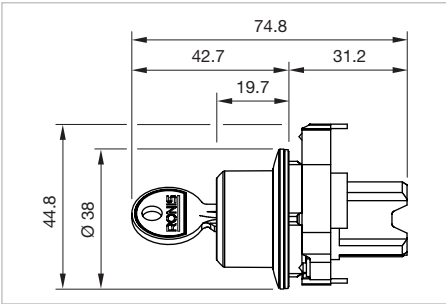

Dimensions [mm]



Product can differ from the current configuration.

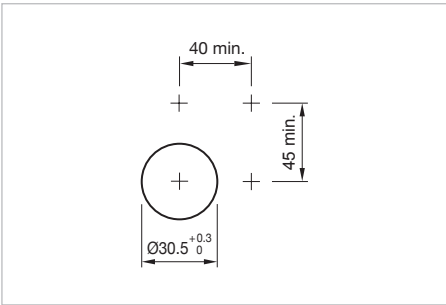

Mounting cut-outs [mm]

Additional Information


- Mounting depth incl. front plate, see chapter «drawings»
- Front panel thickness 1 ... 6 mm
- The standard lock: RONIS, T254
- Two keys are supplied with each key lock switch



Switching positions (A = Rest, B = Momentary, C = Maintained)

Front ring	Switching action	Switching angle	Key remove	Part No.	Wiring diagram	Weight
 Keylock switch 2 positions, Front dimension Ø 38 mm						
Metal sandgrey	A - B	B = 45°	A	45-290J.4F00.116	1	0.090 kg
	A - C	C = 90°	A + C	45-290H.4F00.111	2	0.090 kg
			A	45-290J.4F00.111	2	0.090 kg
 Keylock switch 3 positions, Front dimension Ø 38 mm						
Metal sandgrey	C - A - C	C = 45°	C - A - C	45-290F.4F00.113	3	0.090 kg

Switching action: A = Rest, B = Momentary, C = Maintain

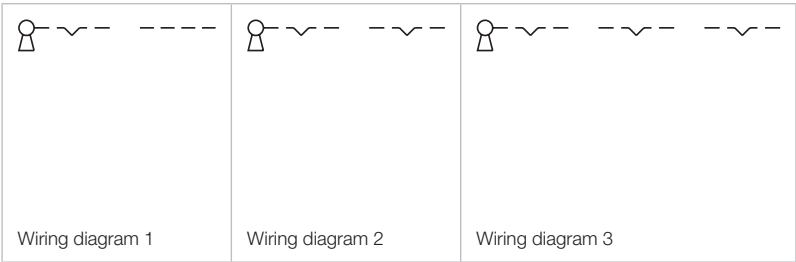


45 Flush design

Selector switch actuator 2 positions short lever, IP66, IP67, IP69K




Product can differ from the current configuration.

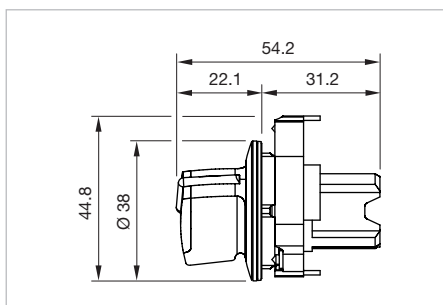

Dimensions [mm]


Additional Information

- It is advisable to choose a white illumination
- Mounting depth incl. front plate, see chapter «drawings»
- Front panel thickness 1 ... 6 mm
- Illumination elements are optional

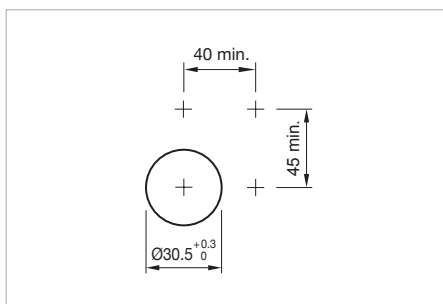


Mounting cut-outs [mm]

Equipment consisting of (schematic overview)



Actuator




Holder

page 134



Switching element

page 136



Illumination element

page 138

Each Part Number listed below includes all the black components shown in the 3D-drawing.

To obtain a complete unit, please select the red components from the pages shown.



Switching positions (A = Rest, B = Momentary, C = Maintained)

Lever	Front ring	Switching action	Switching angle	Part No.	Wiring diagram	Weight
 Selector switch actuator 2 positions, short lever, Front dimension Ø 38 mm						
Plastic red	Metal sandgrey	A - B	B = 45°	45-2844.4C20.006	1	0.055 kg
 Selector switch actuator 2 positions, short lever, Front dimension Ø 38 mm						
Plastic green	Metal sandgrey	A - B	B = 45°	45-2844.4C50.006	1	0.055 kg
 Selector switch actuator 2 positions, short lever, Front dimension Ø 38 mm						
Plastic white	Metal sandgrey	A - B	B = 45°	45-2844.4C90.006	1	0.055 kg
 Selector switch actuator 2 positions, short lever, Front dimension Ø 38 mm						
Plastic red	Metal sandgrey	A - C	C = 90°	45-2828.4C20.001	2	0.055 kg

Lever	Front ring	Switching action	Switching angle	Part No.	Wiring diagram	Weight
 Selector switch actuator 2 positions, short lever, Front dimension Ø 38 mm						
Plastic green	Metal sandgrey	A - C	C = 90°	45-2828.4C50.001	2	0.055 kg
 Selector switch actuator 2 positions, short lever, Front dimension Ø 38 mm						
Plastic white	Metal sandgrey	A - C	C = 90°	45-2828.4C90.001	2	0.055 kg

Switching action: A = Rest, B = Momentary, C = Maintain


	
Wiring diagram 1	Wiring diagram 2

45 Flush design

Selector switch 2 positions long lever, IP66, IP67, IP69K




Product can differ from the current configuration.

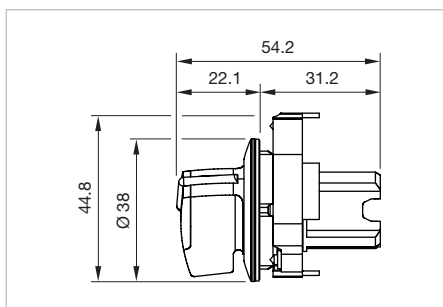

Dimensions [mm]


Additional Information

- It is advisable to choose a white illumination
- Mounting depth incl. front plate, see chapter «drawings»
- Front panel thickness 1 ... 6 mm
- Illumination elements are optional

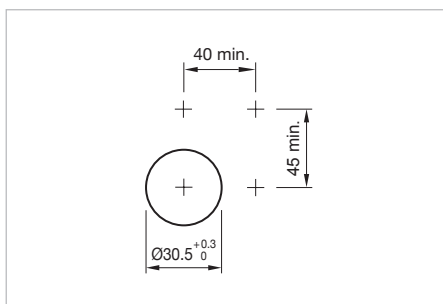


Mounting cut-outs [mm]

Equipment consisting of (schematic overview)



Actuator




Holder

page 134



Switching element

page 136



Illumination element

page 138

Each Part Number listed below includes all the black components shown in the 3D-drawing.

To obtain a complete unit, please select the red components from the pages shown.




Switching positions (A = Rest, B = Momentary, C = Maintained)

Lever	Front ring	Switching action	Switching angle	Part No.	Wiring diagram	Weight
	Selector switch actuator 2 positions, long lever, Front dimension Ø 38 mm					
Plastic red	Metal sandgrey	A - B	B = 45°	45-2844.4D20.006	1	0.055 kg
	Selector switch actuator 2 positions, long lever, Front dimension Ø 38 mm					
Plastic green	Metal sandgrey	A - B	B = 45°	45-2844.4D50.006	1	0.055 kg
	Selector switch actuator 2 positions, long lever, Front dimension Ø 38 mm					
Plastic white	Metal sandgrey	A - B	B = 45°	45-2844.4D90.006	1	0.055 kg
	Selector switch actuator 2 positions, long lever, Front dimension Ø 38 mm					
Plastic red	Metal sandgrey	A - C	C = 90°	45-2828.4D20.001	2	0.055 kg

Lever	Front ring	Switching action	Switching angle	Part No.	Wiring diagram	Weight
 Selector switch actuator 2 positions, long lever, Front dimension Ø 38 mm						
Plastic green	Metal sandgrey	A - C	C = 90°	45-2828.4D50.001	2	0.055 kg
 Selector switch actuator 2 positions, long lever, Front dimension Ø 38 mm						
Plastic white	Metal sandgrey	A - C	C = 90°	45-2828.4D90.001	2	0.055 kg

Switching action: A = Rest, B = Momentary, C = Maintain


	
Wiring diagram 1	Wiring diagram 2

45 Flush design

Selector switch 3 positions short lever, IP66, IP67, IP69K




Product can differ from the current configuration.

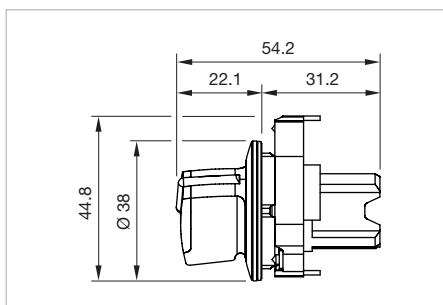


Additional Information


- It is advisable to choose a white illumination
- Mounting depth incl. front plate, see chapter «drawings»
- Front panel thickness 1 ... 6 mm
- Illumination elements are optional

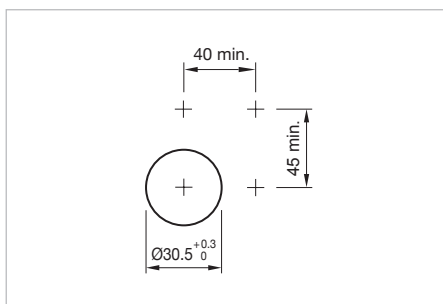

Equipment consisting of (schematic overview)



Actuator




Holder

page 134



Switching element

page 136




Illumination element

page 138

Each Part Number listed below includes all the black components shown in the 3D-drawing.

To obtain a complete unit, please select the red components from the pages shown.



Switching positions (A = Rest, B = Momentary, C = Maintained)

Lever	Front ring	Switching action	Switching angle	Part No.	Wiring diagram	Weight
	Selector switch actuator 3 positions, short lever, Front dimension Ø 38 mm					
Plastic red	Metal sandgrey	C - A - C	C = 45°	45-2819.4C20.003	1	0.055 kg
	Selector switch actuator 3 positions, short lever, Front dimension Ø 38 mm					
Plastic green	Metal sandgrey	C - A - C	C = 45°	45-2819.4C50.003	1	0.055 kg
	Selector switch actuator 3 positions, short lever, Front dimension Ø 38 mm					
Plastic white	Metal sandgrey	C - A - C	C = 45°	45-2819.4C90.003	1	0.055 kg
	Selector switch actuator 3 positions, short lever, Front dimension Ø 38 mm					
Plastic red	Metal sandgrey	B - A - B	B = 45°	45-280S.4C20.003	2	0.055 kg

Lever	Front ring	Switching action	Switching angle	Part No.	Wiring diagram	Weight
 Selector switch actuator 3 positions, short lever, Front dimension Ø 38 mm						
Plastic green	Metal sandgrey	B - A - B	B = 45°	45-280S.4C50.003	2	0.055 kg
 Selector switch actuator 3 positions, short lever, Front dimension Ø 38 mm						
Plastic white	Metal sandgrey	B - A - B	B = 45°	45-280S.4C90.003	2	0.055 kg

Switching action: A = Rest, B = Momentary, C = Maintain


	
Wiring diagram 1	Wiring diagram 2

45 Flush design

Selector switch 3 positions long lever, IP66, IP67, IP69K




Product can differ from the current configuration.

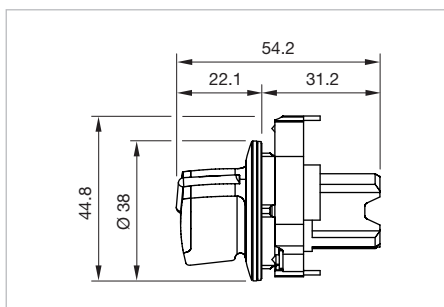

Dimensions [mm]


Additional Information

- It is advisable to choose a white illumination
- Mounting depth incl. front plate, see chapter «drawings»
- Front panel thickness 1 ... 6 mm
- Illumination elements are optional

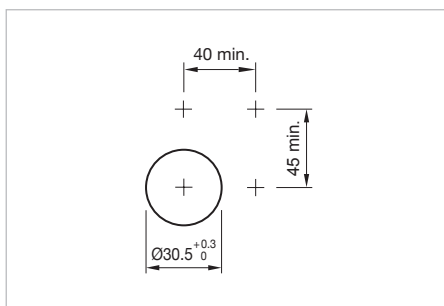


Mounting cut-outs [mm]

Equipment consisting of (schematic overview)



Actuator




Holder

page 134



Switching element

page 136




Illumination element

page 138

Each Part Number listed below includes all the black components shown in the 3D-drawing.

To obtain a complete unit, please select the red components from the pages shown.



Switching positions (A = Rest, B = Momentary, C = Maintained)

Lever	Front ring	Switching action	Switching angle	Part No.	Wiring diagram	Weight
 Selector switch actuator 3 positions, long lever, Front dimension Ø 38 mm						
Plastic red	Metal sandgrey	C - A - C	C = 45°	45-2819.4D20.003	1	0.055 kg
 Selector switch actuator 3 positions, long lever, Front dimension Ø 38 mm						
Plastic green	Metal sandgrey	C - A - C	C = 45°	45-2819.4D50.003	1	0.055 kg
 Selector switch actuator 3 positions, long lever, Front dimension Ø 38 mm						
Plastic white	Metal sandgrey	C - A - C	C = 45°	45-2819.4D90.003	1	0.055 kg
 Selector switch actuator 3 positions, long lever, Front dimension Ø 38 mm						
Plastic red	Metal sandgrey	B - A - B	B = 45°	45-280S.4D20.003	2	0.055 kg

Lever	Front ring	Switching action	Switching angle	Part No.	Wiring diagram	Weight
 Selector switch actuator 3 positions, long lever, Front dimension Ø 38 mm						
Plastic green	Metal sandgrey	B - A - B	B = 45°	45-280S.4D50.003	2	0.055 kg
 Selector switch actuator 3 positions, long lever, Front dimension Ø 38 mm						
Plastic white	Metal sandgrey	B - A - B	B = 45°	45-280S.4D90.003	2	0.055 kg

Switching action: A = Rest, B = Momentary, C = Maintain


 Wiring diagram 1	 Wiring diagram 2
--	--

45 Raised design

Indicator full face illumination, IP66, IP67, IP69K




Product can differ from the current configuration.

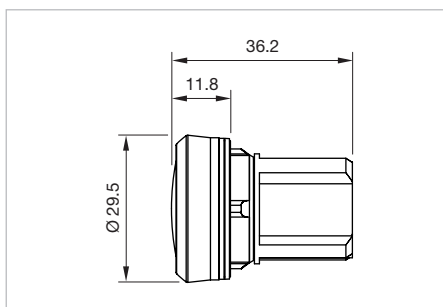

Dimensions [mm]

Additional Information

- Mounting depth incl. front plate, see chapter «drawings»

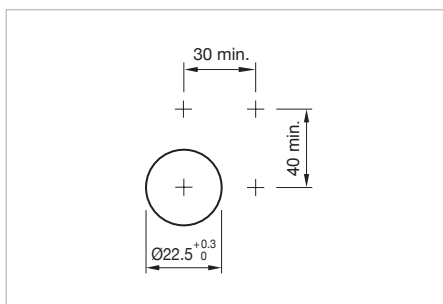


Mounting cut-outs [mm]

Equipment consisting of (schematic overview)




Actuator



Holder

page 134



Illumination element

page 138

Each Part Number listed below includes all the black components shown in the 3D-drawing.

To obtain a complete unit, please select the red components from the pages shown.

LED colour	Housing material	Lens cap	Part No.	Weight
 Indicator actuator, Front dimension Ø 29.45 mm				
amber	Plastic	Plastic amber transparency	45-2T00.10F0.000	0.001 kg
 Indicator actuator, Front dimension Ø 29.45 mm				
red	Plastic	Plastic red transparent	45-2T00.10E0.000	0.001 kg
 Indicator actuator, Front dimension Ø 29.45 mm				
yellow	Plastic	Plastic yellow transparent	45-2T00.10G0.000	0.001 kg
 Indicator actuator, Front dimension Ø 29.45 mm				
green	Plastic	Plastic green transparent	45-2T00.10H0.000	0.001 kg
 Indicator actuator, Front dimension Ø 29.45 mm				
blue	Plastic	Plastic blue transparent	45-2T00.10J0.000	0.001 kg


LED colour	Housing material	Lens cap	Part No.	Weight
 Indicator actuator, Front dimension Ø 29.45 mm				
white	Plastic	Plastic white transparent	45-2T00.10N0.000	0.001 kg
 Indicator actuator, Front dimension Ø 29.45 mm				
white	Plastic	Plastic colourless transparent	45-2T00.10K0.000	0.001 kg
 Indicator actuator, Front dimension Ø 29.45 mm				
amber	Metal	Plastic amber transparency	45-2T00.20F0.000	0.010 kg
 Indicator actuator, Front dimension Ø 29.45 mm				
red	Metal	Plastic red transparent	45-2T00.20E0.000	0.010 kg
 Indicator actuator, Front dimension Ø 29.45 mm				
yellow	Metal	Plastic yellow transparent	45-2T00.20G0.000	0.010 kg
 Indicator actuator, Front dimension Ø 29.45 mm				
green	Metal	Plastic green transparent	45-2T00.20H0.000	0.010 kg
 Indicator actuator, Front dimension Ø 29.45 mm				
blue	Metal	Plastic blue transparent	45-2T00.20J0.000	0.010 kg
 Indicator actuator, Front dimension Ø 29.45 mm				
white	Metal	Plastic white transparent	45-2T00.20N0.000	0.010 kg
 Indicator actuator, Front dimension Ø 29.45 mm				
white	Metal	Plastic colourless transparent	45-2T00.20K0.000	0.010 kg

45 Raised design

Indicator front illumination, IP66, IP67, IP69K




Product can differ from the current configuration.

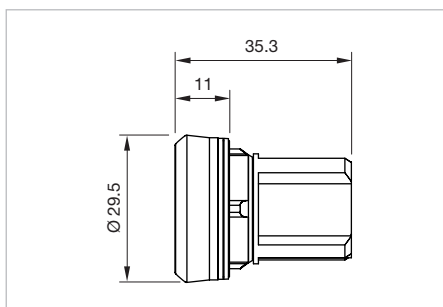

Dimensions [mm]

Additional Information

- Mounting depth incl. front plate, see chapter «drawings»

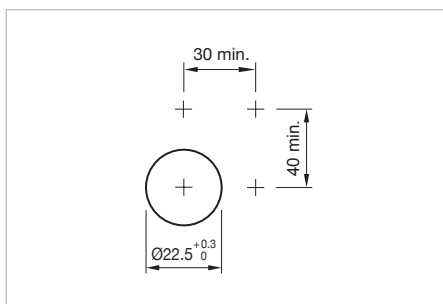


Mounting cut-outs [mm]

Equipment consisting of (schematic overview)




Actuator



Holder

page 134



Illumination element

page 138

Each Part Number listed below includes all the black components shown in the 3D-drawing.

To obtain a complete unit, please select the red components from the pages shown.

LED colour	Front ring	Lens	Housing material	Part No.	Weight
 Indicator actuator, Front dimension Ø 29.45 mm					
red	Plastic black	Plastic red transparent	Plastic	45-2T07.10E0.000	0.011 kg
 Indicator actuator, Front dimension Ø 29.45 mm					
yellow	Plastic black	Plastic yellow transparent	Plastic	45-2T07.10G0.000	0.011 kg
 Indicator actuator, Front dimension Ø 29.45 mm					
green	Plastic black	Plastic green transparent	Plastic	45-2T07.10H0.000	0.011 kg
 Indicator actuator, Front dimension Ø 29.45 mm					
blue	Plastic black	Plastic blue transparent	Plastic	45-2T07.10J0.000	0.011 kg
 Indicator actuator, Front dimension Ø 29.45 mm					
colourless	Plastic black	Plastic colourless transparent	Plastic	45-2T07.10K0.000	0.011 kg


LED colour	Front ring	Lens	Housing material	Part No.	Weight
 Indicator actuator, Front dimension Ø 29.45 mm					
red	Metal sandgrey	Plastic red transparent	Plastic	45-2T07.30E0.000	0.020 kg
 Indicator actuator, Front dimension Ø 29.45 mm					
yellow	Metal sandgrey	Plastic yellow transparent	Plastic	45-2T07.30G0.000	0.020 kg
 Indicator actuator, Front dimension Ø 29.45 mm					
green	Metal sandgrey	Plastic green transparent	Plastic	45-2T07.30H0.000	0.020 kg
 Indicator actuator, Front dimension Ø 29.45 mm					
blue	Metal sandgrey	Plastic blue transparent	Plastic	45-2T07.30J0.000	0.020 kg
 Indicator actuator, Front dimension Ø 29.45 mm					
colourless	Metal sandgrey	Plastic colourless transparent	Plastic	45-2T07.30K0.000	0.020 kg

45 Raised design

Pushbutton, IP66, IP67, IP69K




Product can differ from the current configuration.

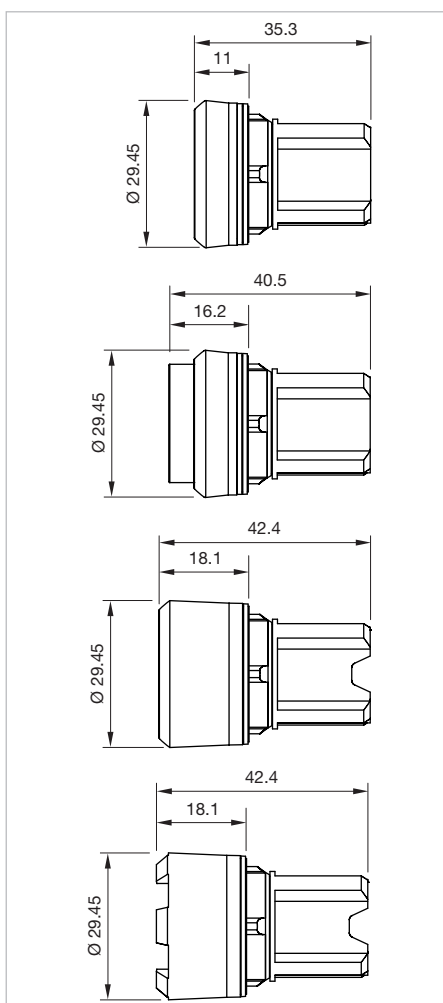

Dimensions [mm]

Additional Information

- Mounting depth incl. front plate, see chapter «drawings»

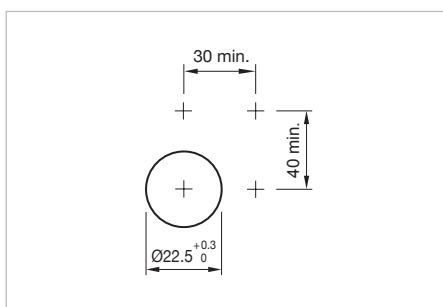


Mounting cut-outs [mm]

Equipment consisting of (schematic overview)




Actuator



Holder

page 134



Switching element

page 136

Each Part Number listed below includes all the black components shown in the 3D-drawing.

To obtain a complete unit, please select the red components from the pages shown.

Product attribute	Front ring	Lens	Housing material	Switching action	Part No.	Wiring diagram	Weight
 Pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens level with front ring	Plastic black	Plastic black	Plastic	B	45-2131.1110.000	1	0.013 kg
 Pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens level with front ring	Plastic black	Plastic red	Plastic	B	45-2131.1120.000	1	0.013 kg
 Pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens level with front ring	Plastic black	Plastic yellow	Plastic	B	45-2131.1140.000	1	0.013 kg
 Pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens level with front ring	Plastic black	Plastic green	Plastic	B	45-2131.1150.000	1	0.013 kg
 Pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens level with front ring	Plastic black	Plastic blue	Plastic	B	45-2131.1160.000	1	0.013 kg
 Pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens level with front ring	Plastic black	Plastic grey	Plastic	B	45-2131.1180.000	1	0.013 kg
 Pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens level with front ring	Plastic black	Plastic white	Plastic	B	45-2131.1190.000	1	0.013 kg
 Pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens level with front ring	Plastic black	Plastic colourless	Plastic	B	45-2131.11K0.000	1	0.013 kg
 Pushbutton actuator, Maintain, Front dimension Ø 29.45 mm							
Lens level with front ring	Plastic black	Plastic black	Plastic	C	45-2134.1110.000	2	0.013 kg

45 Raised design

Product attribute	Front ring	Lens	Housing material	Switching action	Part No.	Wiring diagram	Weight
 Pushbutton actuator, Maintain, Front dimension Ø 29.45 mm							
Lens level with front ring	Plastic black	Plastic red	Plastic	C	45-2134.1120.000	2	0.013 kg
 Pushbutton actuator, Maintain, Front dimension Ø 29.45 mm							
Lens level with front ring	Plastic black	Plastic yellow	Plastic	C	45-2134.1140.000	2	0.013 kg
 Pushbutton actuator, Maintain, Front dimension Ø 29.45 mm							
Lens level with front ring	Plastic black	Plastic green	Plastic	C	45-2134.1150.000	2	0.013 kg
 Pushbutton actuator, Maintain, Front dimension Ø 29.45 mm							
Lens level with front ring	Plastic black	Plastic blue	Plastic	C	45-2134.1160.000	2	0.013 kg
 Pushbutton actuator, Maintain, Front dimension Ø 29.45 mm							
Lens level with front ring	Plastic black	Plastic white	Plastic	C	45-2134.1190.000	2	0.013 kg
 Pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens level with front ring	Metal sandgrey	Plastic black	Plastic	B	45-2131.3110.000	1	0.021 kg
 Pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens level with front ring	Metal sandgrey	Plastic red	Plastic	B	45-2131.3120.000	1	0.021 kg
 Pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens level with front ring	Metal sandgrey	Plastic yellow	Plastic	B	45-2131.3140.000	1	0.021 kg
 Pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens level with front ring	Metal sandgrey	Plastic green	Plastic	B	45-2131.3150.000	1	0.021 kg

Product attribute	Front ring	Lens	Housing material	Switching action	Part No.	Wiring diagram	Weight
 Pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens level with front ring	Metal sandgrey	Plastic blue	Plastic	B	45-2131.3160.000	1	0.021 kg
 Pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens level with front ring	Metal sandgrey	Plastic grey	Plastic	B	45-2131.3180.000	1	0.021 kg
 Pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens level with front ring	Metal sandgrey	Plastic white	Plastic	B	45-2131.3190.000	1	0.021 kg
 Pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens level with front ring	Metal sandgrey	Plastic colourless	Plastic	B	45-2131.31K0.000	1	0.021 kg
 Pushbutton actuator, Maintain, Front dimension Ø 29.45 mm							
Lens level with front ring	Metal sandgrey	Plastic black	Plastic	C	45-2134.3110.000	2	0.021 kg
 Pushbutton actuator, Maintain, Front dimension Ø 29.45 mm							
Lens level with front ring	Metal sandgrey	Plastic red	Plastic	C	45-2134.3120.000	2	0.021 kg
 Pushbutton actuator, Maintain, Front dimension Ø 29.45 mm							
Lens level with front ring	Metal sandgrey	Plastic yellow	Plastic	C	45-2134.3140.000	2	0.021 kg
 Pushbutton actuator, Maintain, Front dimension Ø 29.45 mm							
Lens level with front ring	Metal sandgrey	Plastic green	Plastic	C	45-2134.3150.000	2	0.021 kg
 Pushbutton actuator, Maintain, Front dimension Ø 29.45 mm							
Lens level with front ring	Metal sandgrey	Plastic blue	Plastic	C	45-2134.3160.000	2	0.021 kg

45 Raised design

Product attribute	Front ring	Lens	Housing material	Switching action	Part No.	Wiring diagram	Weight
 Pushbutton actuator, Maintain, Front dimension Ø 29.45 mm							
Lens level with front ring	Metal sandgrey	Plastic white	Plastic	C	45-2134.3190.000	2	0.021 kg
 Pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens level with front ring	Metal silver	Plastic black	Metal	B	45-2131.2110.000	1	0.048 kg
 Pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens level with front ring	Metal silver	Plastic red	Metal	B	45-2131.2120.000	1	0.048 kg
 Pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens level with front ring	Metal silver	Plastic yellow	Metal	B	45-2131.2140.000	1	0.048 kg
 Pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens level with front ring	Metal silver	Plastic green	Metal	B	45-2131.2150.000	1	0.048 kg
 Pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens level with front ring	Metal silver	Plastic blue	Metal	B	45-2131.2160.000	1	0.048 kg
 Pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens level with front ring	Metal silver	Plastic grey	Metal	B	45-2131.2180.000	1	0.048 kg
 Pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens level with front ring	Metal silver	Plastic white	Metal	B	45-2131.2190.000	1	0.048 kg
 Pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens level with front ring	Metal silver	Plastic colourless	Metal	B	45-2131.21K0.000	1	0.048 kg


Product attribute	Front ring	Lens	Housing material	Switching action	Part No.	Wiring diagram	Weight
 Pushbutton actuator, Maintain, Front dimension Ø 29.45 mm							
Lens level with front ring	Metal silver	Plastic black	Metal	C	45-2134.2110.000	2	0.048 kg
 Pushbutton actuator, Maintain, Front dimension Ø 29.45 mm							
Lens level with front ring	Metal silver	Plastic red	Metal	C	45-2134.2120.000	2	0.048 kg
 Pushbutton actuator, Maintain, Front dimension Ø 29.45 mm							
Lens level with front ring	Metal silver	Plastic yellow	Metal	C	45-2134.2140.000	2	0.048 kg
 Pushbutton actuator, Maintain, Front dimension Ø 29.45 mm							
Lens level with front ring	Metal silver	Plastic green	Metal	C	45-2134.2150.000	2	0.048 kg
 Pushbutton actuator, Maintain, Front dimension Ø 29.45 mm							
Lens level with front ring	Metal silver	Plastic blue	Metal	C	45-2134.2160.000	2	0.048 kg
 Pushbutton actuator, Maintain, Front dimension Ø 29.45 mm							
Lens level with front ring	Metal silver	Plastic white	Metal	C	45-2134.2190.000	2	0.048 kg
 Pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens raised above bezel	Plastic black	Plastic black	Plastic	B	45-2131.1210.000	1	0.013 kg
 Pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens raised above bezel	Plastic black	Plastic red	Plastic	B	45-2131.1220.000	1	0.013 kg
 Pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens raised above bezel	Plastic black	Plastic yellow	Plastic	B	45-2131.1240.000	1	0.013 kg

45 Raised design

Product attribute	Front ring	Lens	Housing material	Switching action	Part No.	Wiring diagram	Weight
 Pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens raised above bezel	Plastic black	Plastic green	Plastic	B	45-2131.1250.000	1	0.013 kg
 Pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens raised above bezel	Plastic black	Plastic blue	Plastic	B	45-2131.1260.000	1	0.013 kg
 Pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens raised above bezel	Plastic black	Plastic white	Plastic	B	45-2131.1290.000	1	0.013 kg
 Pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens raised above bezel	Metal sandgrey	Plastic black	Plastic	B	45-2131.3210.000	1	0.021 kg
 Pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens raised above bezel	Metal sandgrey	Plastic red	Plastic	B	45-2131.3220.000	1	0.021 kg
 Pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens raised above bezel	Metal sandgrey	Plastic yellow	Plastic	B	45-2131.3240.000	1	0.021 kg
 Pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens raised above bezel	Metal sandgrey	Plastic green	Plastic	B	45-2131.3250.000	1	0.021 kg
 Pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens raised above bezel	Metal sandgrey	Plastic blue	Plastic	B	45-2131.3260.000	1	0.021 kg
 Pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens raised above bezel	Metal sandgrey	Plastic white	Plastic	B	45-2131.3290.000	1	0.021 kg

Product attribute	Front ring	Lens	Housing material	Switching action	Part No.	Wiring diagram	Weight
 Pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens raised above bezel	Metal silver	Plastic black	Metal	B	45-2131.2210.000	1	0.021 kg
 Pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens raised above bezel	Metal silver	Plastic red	Metal	B	45-2131.2220.000	1	0.048 kg
 Pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens raised above bezel	Metal silver	Plastic yellow	Metal	B	45-2131.2240.000	1	0.048 kg
 Pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens raised above bezel	Metal silver	Plastic green	Metal	B	45-2131.2250.000	1	0.048 kg
 Pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens raised above bezel	Metal silver	Plastic blue	Metal	B	45-2131.2260.000	1	0.048 kg
 Pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens raised above bezel	Metal silver	Plastic white	Metal	B	45-2131.2290.000	1	0.048 kg
 Pushbutton actuator, Maintain, Front dimension Ø 29.45 mm							
Lens raised above bezel	Metal silver	Plastic red	Metal	C	45-2134.2220.000	2	0.048 kg
 Pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens lower than front ring	Plastic black	Plastic black	Plastic	B	45-2131.1310.000	1	0.013 kg
 Pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens lower than front ring	Plastic black	Plastic red	Plastic	B	45-2131.1320.000	1	0.013 kg

45 Raised design

Product attribute	Front ring	Lens	Housing material	Switching action	Part No.	Wiring diagram	Weight
 Pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens lower than front ring	Plastic black	Plastic yellow	Plastic	B	45-2131.1340.000	1	0.013 kg
 Pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens lower than front ring	Plastic black	Plastic green	Plastic	B	45-2131.1350.000	1	0.013 kg
 Pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens lower than front ring	Plastic black	Plastic blue	Plastic	B	45-2131.1360.000	1	0.013 kg
 Pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens lower than front ring	Plastic black	Plastic white	Plastic	B	45-2131.1390.000	1	0.013 kg
 Pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens lower than front ring	Metal sandgrey	Plastic black	Plastic	B	45-2131.3310.000	1	0.021 kg
 Pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens lower than front ring	Metal sandgrey	Plastic red	Plastic	B	45-2131.3320.000	1	0.021 kg
 Pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens lower than front ring	Metal sandgrey	Plastic yellow	Plastic	B	45-2131.3340.000	1	0.021 kg
 Pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens lower than front ring	Metal sandgrey	Plastic green	Plastic	B	45-2131.3350.000	1	0.021 kg
 Pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens lower than front ring	Metal sandgrey	Plastic blue	Plastic	B	45-2131.3360.000	1	0.021 kg

Product attribute	Front ring	Lens	Housing material	Switching action	Part No.	Wiring diagram	Weight
	Pushbutton actuator, Momentary, Front dimension Ø 29.45 mm						
Lens lower than front ring	Metal sandgrey	Plastic white	Plastic	B	45-2131.3390.000	1	0.021 kg
	Pushbutton actuator, Momentary, Front dimension Ø 29.45 mm						
Lens lower than front ring	Metal silver	Plastic black	Metal	B	45-2131.2310.000	1	0.048 kg
	Pushbutton actuator, Momentary, Front dimension Ø 29.45 mm						
Lens lower than front ring	Metal silver	Plastic red	Metal	B	45-2131.2320.000	1	0.048 kg
	Pushbutton actuator, Momentary, Front dimension Ø 29.45 mm						
Lens lower than front ring	Metal silver	Plastic yellow	Metal	B	45-2131.2340.000	1	0.048 kg
	Pushbutton actuator, Momentary, Front dimension Ø 29.45 mm						
Lens lower than front ring	Metal silver	Plastic green	Metal	B	45-2131.2350.000	1	0.048 kg
	Pushbutton actuator, Momentary, Front dimension Ø 29.45 mm						
Lens lower than front ring	Metal silver	Plastic blue	Metal	B	45-2131.2360.000	1	0.048 kg
	Pushbutton actuator, Momentary, Front dimension Ø 29.45 mm						
Lens lower than front ring	Metal silver	Plastic white	Metal	B	45-2131.2390.000	1	0.048 kg
	Pushbutton actuator, Momentary, Front dimension Ø 29.45 mm						
Lens lower than front ring, with castellation	Plastic black	Plastic black	Plastic	B	45-2131.1410.000	1	0.013 kg
	Pushbutton actuator, Momentary, Front dimension Ø 29.45 mm						
Lens lower than front ring, with castellation	Plastic black	Plastic red	Plastic	B	45-2131.1420.000	1	0.013 kg

45 Raised design

Product attribute	Front ring	Lens	Housing material	Switching action	Part No.	Wiring diagram	Weight
 Pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens lower than front ring, with castellation	Plastic black	Plastic yellow	Plastic	B	45-2131.1440.000	1	0.013 kg
 Pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens lower than front ring, with castellation	Plastic black	Plastic green	Plastic	B	45-2131.1450.000	1	0.013 kg
 Pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens lower than front ring, with castellation	Plastic black	Plastic blue	Plastic	B	45-2131.1460.000	1	0.013 kg
 Pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens lower than front ring, with castellation	Plastic black	Plastic white	Plastic	B	45-2131.1490.000	1	0.013 kg


Switching action: B = Momentary, C = Maintain

	
Wiring diagram 1	Wiring diagram 2

Illuminated pushbutton, IP66, IP67, IP69K

Equipment consisting of (schematic overview)

**Actuator**


**Holder** *page 134*

**Switching element** *page 136*

**Illumination element** *page 138*

Each Part Number listed below includes all the black components shown in the 3D-drawing.


To obtain a complete unit, please select the red components from the pages shown.

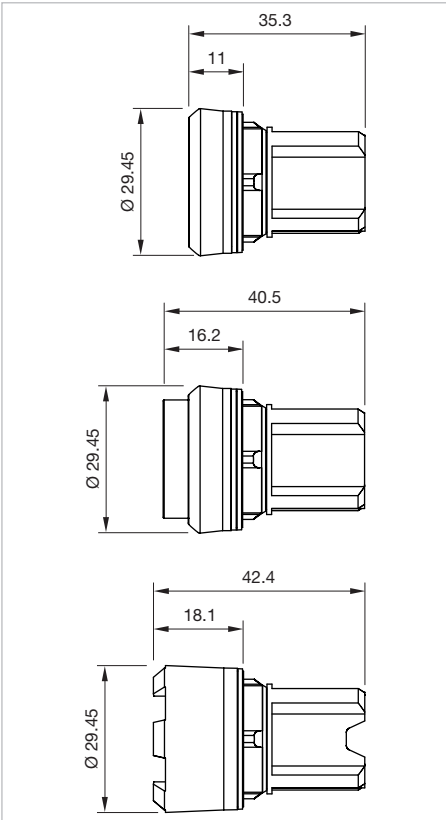

Dimensions [mm]



Product can differ from the current configuration.

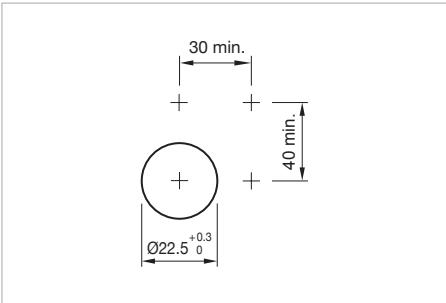

Mounting cut-outs [mm]

Additional Information

- Mounting depth incl. front plate, see chapter «drawings»

Product attribute	Front ring	Lens	Housing material	Switching action	Part No.	Wiring diagram	Weight
 Illuminated pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens level with front ring	Plastic black	Plastic amber transparency	Plastic	B	45-2231.11F0.000	1	0.011 kg
 Illuminated pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens level with front ring	Plastic black	Plastic red transparent	Plastic	B	45-2231.11E0.000	1	0.011 kg

45 Raised design

Product attribute	Front ring	Lens	Housing material	Switching action	Part No.	Wiring diagram	Weight
 Illuminated pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens level with front ring	Plastic black	Plastic yellow transparent	Plastic	B	45-2231.11G0.000	1	0.011 kg
 Illuminated pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens level with front ring	Plastic black	Plastic green transparent	Plastic	B	45-2231.11H0.000	1	0.011 kg
 Illuminated pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens level with front ring	Plastic black	Plastic blue transparent	Plastic	B	45-2231.11J0.000	1	0.011 kg
 Illuminated pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens level with front ring	Plastic black	Plastic white transparent	Plastic	B	45-2231.11N0.000	1	0.011 kg
 Illuminated pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens level with front ring	Plastic black	Plastic colourless transparent	Plastic	B	45-2231.11K0.000	1	0.011 kg
 Illuminated pushbutton actuator, Maintain, Front dimension Ø 29.45 mm							
Lens level with front ring	Plastic black	Plastic red transparent	Plastic	C	45-2234.11E0.000	2	0.011 kg
 Illuminated pushbutton actuator, Maintain, Front dimension Ø 29.45 mm							
Lens level with front ring	Plastic black	Plastic yellow transparent	Plastic	C	45-2234.11G0.000	2	0.011 kg
 Illuminated pushbutton actuator, Maintain, Front dimension Ø 29.45 mm							
Lens level with front ring	Plastic black	Plastic green transparent	Plastic	C	45-2234.11H0.000	2	0.011 kg
 Illuminated pushbutton actuator, Maintain, Front dimension Ø 29.45 mm							
Lens level with front ring	Plastic black	Plastic blue transparent	Plastic	C	45-2234.11J0.000	2	0.011 kg

Product attribute	Front ring	Lens	Housing material	Switching action	Part No.	Wiring diagram	Weight
 Illuminated pushbutton actuator, Maintain, Front dimension Ø 29.45 mm							
Lens level with front ring	Plastic black	Plastic white transparent	Plastic	C	45-2234.11N0.000	2	0.011 kg
 Illuminated pushbutton actuator, Maintain, Front dimension Ø 29.45 mm							
Lens level with front ring	Plastic black	Plastic colourless transparent	Plastic	C	45-2234.11K0.000	2	0.011 kg
 Illuminated pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens level with front ring	Metal sandgrey	Plastic amber transparency	Plastic	B	45-2231.31F0.000	1	0.020 kg
 Illuminated pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens level with front ring	Metal sandgrey	Plastic red transparent	Plastic	B	45-2231.31E0.000	1	0.020 kg
 Illuminated pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens level with front ring	Metal sandgrey	Plastic yellow transparent	Plastic	B	45-2231.31G0.000	1	0.020 kg
 Illuminated pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens level with front ring	Metal sandgrey	Plastic green transparent	Plastic	B	45-2231.31H0.000	1	0.020 kg
 Illuminated pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens level with front ring	Metal sandgrey	Plastic blue transparent	Plastic	B	45-2231.31J0.000	1	0.020 kg
 Illuminated pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens level with front ring	Metal sandgrey	Plastic white transparent	Plastic	B	45-2231.31N0.000	1	0.020 kg
 Illuminated pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens level with front ring	Metal sandgrey	Plastic colourless transparent	Plastic	B	45-2231.31K0.000	1	0.020 kg

45 Raised design

Product attribute	Front ring	Lens	Housing material	Switching action	Part No.	Wiring diagram	Weight
 Illuminated pushbutton actuator, Maintain, Front dimension Ø 29.45 mm							
Lens level with front ring	Metal sandgrey	Plastic red transparent	Plastic	C	45-2234.31E0.000	2	0.020 kg
 Illuminated pushbutton actuator, Maintain, Front dimension Ø 29.45 mm							
Lens level with front ring	Metal sandgrey	Plastic yellow transparent	Plastic	C	45-2234.31G0.000	2	0.020 kg
 Illuminated pushbutton actuator, Maintain, Front dimension Ø 29.45 mm							
Lens level with front ring	Metal sandgrey	Plastic green transparent	Plastic	C	45-2234.31H0.000	2	0.020 kg
 Illuminated pushbutton actuator, Maintain, Front dimension Ø 29.45 mm							
Lens level with front ring	Metal sandgrey	Plastic blue transparent	Plastic	C	45-2234.31J0.000	2	0.020 kg
 Illuminated pushbutton actuator, Maintain, Front dimension Ø 29.45 mm							
Lens level with front ring	Metal sandgrey	Plastic white transparent	Plastic	C	45-2234.31N0.000	2	0.020 kg
 Illuminated pushbutton actuator, Maintain, Front dimension Ø 29.45 mm							
Lens level with front ring	Metal sandgrey	Plastic colourless transparent	Plastic	C	45-2234.31K0.000	2	0.020 kg
 Illuminated pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens level with front ring	Metal silver	Plastic amber transparency	Metal	B	45-2231.21F0.000	1	0.032 kg
 Illuminated pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens level with front ring	Metal silver	Plastic red transparent	Metal	B	45-2231.21E0.000	1	0.032 kg
 Illuminated pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens level with front ring	Metal silver	Plastic yellow transparent	Metal	B	45-2231.21G0.000	1	0.032 kg

Product attribute	Front ring	Lens	Housing material	Switching action	Part No.	Wiring diagram	Weight
 Illuminated pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens level with front ring	Metal silver	Plastic green transparent	Metal	B	45-2231.21H0.000	1	0.032 kg
 Illuminated pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens level with front ring	Metal silver	Plastic blue transparent	Metal	B	45-2231.21J0.000	1	0.032 kg
 Illuminated pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens level with front ring	Metal silver	Plastic white transparent	Metal	B	45-2231.21N0.000	1	0.032 kg
 Illuminated pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens level with front ring	Metal silver	Plastic colourless transparent	Metal	B	45-2231.21K0.000	1	0.032 kg
 Illuminated pushbutton actuator, Maintain, Front dimension Ø 29.45 mm							
Lens level with front ring	Metal silver	Plastic red transparent	Metal	C	45-2234.21E0.000	2	0.032 kg
 Illuminated pushbutton actuator, Maintain, Front dimension Ø 29.45 mm							
Lens level with front ring	Metal silver	Plastic yellow transparent	Metal	C	45-2234.21G0.000	2	0.032 kg
 Illuminated pushbutton actuator, Maintain, Front dimension Ø 29.45 mm							
Lens level with front ring	Metal silver	Plastic green transparent	Metal	C	45-2234.21H0.000	2	0.032 kg
 Illuminated pushbutton actuator, Maintain, Front dimension Ø 29.45 mm							
Lens level with front ring	Metal silver	Plastic blue transparent	Metal	C	45-2234.21J0.000	2	0.032 kg
 Illuminated pushbutton actuator, Maintain, Front dimension Ø 29.45 mm							
Lens level with front ring	Metal silver	Plastic white transparent	Metal	C	45-2234.21N0.000	2	0.032 kg

45 Raised design

Product attribute	Front ring	Lens	Housing material	Switching action	Part No.	Wiring diagram	Weight
 Illuminated pushbutton actuator, Maintain, Front dimension Ø 29.45 mm							
Lens level with front ring	Metal silver	Plastic colourless transparent	Metal	C	45-2234.21K0.000	2	0.032 kg
 Illuminated pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens raised above bezel	Plastic black	Plastic red transparent	Plastic	B	45-2231.12E0.000	1	0.011 kg
 Illuminated pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens raised above bezel	Plastic black	Plastic yellow transparent	Plastic	B	45-2231.12G0.000	1	0.011 kg
 Illuminated pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens raised above bezel	Plastic black	Plastic green transparent	Plastic	B	45-2231.12H0.000	1	0.011 kg
 Illuminated pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens raised above bezel	Plastic black	Plastic blue transparent	Plastic	B	45-2231.12J0.000	1	0.011 kg
 Illuminated pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens raised above bezel	Plastic black	Plastic colourless transparent	Plastic	B	45-2231.12K0.000	1	0.011 kg
 Illuminated pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens raised above bezel	Metal sandgrey	Plastic red transparent	Plastic	B	45-2231.32E0.000	1	0.020 kg
 Illuminated pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens raised above bezel	Metal sandgrey	Plastic yellow transparent	Plastic	B	45-2231.32G0.000	1	0.020 kg
 Illuminated pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens raised above bezel	Metal sandgrey	Plastic green transparent	Plastic	B	45-2231.32H0.000	1	0.020 kg

Product attribute	Front ring	Lens	Housing material	Switching action	Part No.	Wiring diagram	Weight
 Illuminated pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens raised above bezel	Metal sandgrey	Plastic blue transparent	Plastic	B	45-2231.32J0.000	1	0.020 kg
 Illuminated pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens raised above bezel	Metal sandgrey	Plastic colourless transparent	Plastic	B	45-2231.32K0.000	1	0.020 kg
 Illuminated pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens raised above bezel	Metal silver	Plastic red transparent	Metal	B	45-2231.22E0.000	1	0.032 kg
 Illuminated pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens raised above bezel	Metal silver	Plastic amber transparency	Metal	B	45-2231.22F0.000	1	0.032 kg
 Illuminated pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens raised above bezel	Metal silver	Plastic yellow transparent	Metal	B	45-2231.22G0.000	1	0.032 kg
 Illuminated pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens raised above bezel	Metal silver	Plastic green transparent	Metal	B	45-2231.22H0.000	1	0.032 kg
 Illuminated pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens raised above bezel	Metal silver	Plastic blue transparent	Metal	B	45-2231.22J0.000	1	0.032 kg
 Illuminated pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens raised above bezel	Metal silver	Plastic colourless transparent	Metal	B	45-2231.22K0.000	1	0.032 kg

45 Raised design


Product attribute	Front ring	Lens	Housing material	Switching action	Part No.	Wiring diagram	Weight
 Illuminated pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens raised above bezel	Metal silver	Plastic white transparent	Metal	B	45-2231.22N0.000	1	0.032 kg
 Illuminated pushbutton actuator, Momentary, Front dimension Ø 29.45 mm							
Lens lower than front ring, with castellation	Plastic black	Plastic blue transparent	Plastic	B	45-2231.14J0.000	1	0.011 kg

Switching action: B = Momentary, C = Maintain

	
Wiring diagram 1	Wiring diagram 2


Double pushbutton, IP66, IP67, IP69K

Equipment consisting of (schematic overview)

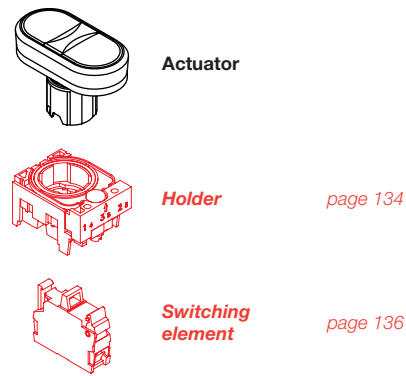

Each Part Number listed below includes all the black components shown in the 3D-drawing.


To obtain a complete unit, please select the red components from the pages shown.

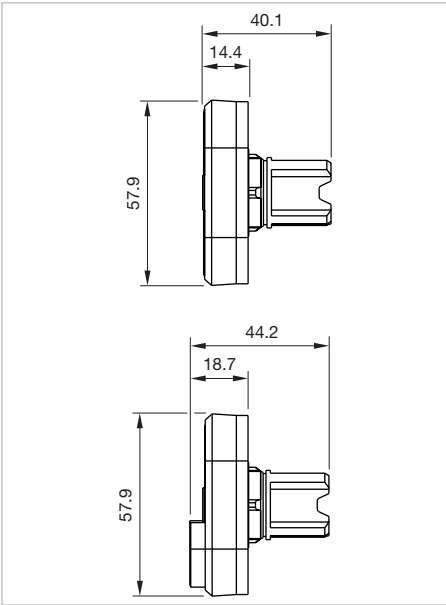

Dimensions [mm]



Product can differ from the current configuration.

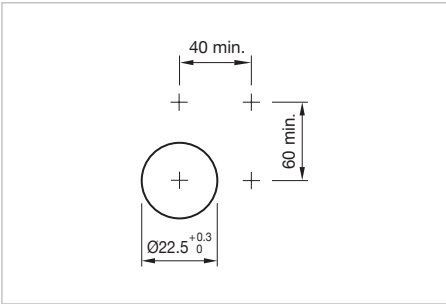

Mounting cut-outs [mm]

Additional Information


- Mounting depth incl. front plate, see chapter «drawings»

Product attribute	Front ring	Lens	Switching action	Part No.	Wiring diagram	Weight
	Double pushbutton actuator, momentary, Front dimension 57.7 x 29.8 mm					
2 lenses, level with front ring	Plastic black	Plastic green-red	B	45-2J31.16T0.000	1	0.026 kg
	Double pushbutton actuator, momentary, Front dimension 57.7 x 29.8 mm					
2 lenses, level with front ring	Plastic black	Plastic white-black	B	45-2J31.16V0.000	1	0.026 kg
	Double pushbutton actuator, momentary, Front dimension 57.7 x 29.8 mm					
2 lenses, level with/raised above front ring	Plastic black	Plastic green-red	B	45-2J31.15T0.000	1	0.026 kg

45 Raised design


Product attribute	Front ring	Lens	Switching action	Part No.	Wiring diagram	Weight
 Double pushbutton actuator, momentary, Front dimension 57.7 x 29.8 mm						
2 lenses, level with/raised above front ring	Plastic black	Plastic white-black	B	45-2J31.15V0.000	1	0.026 kg
 Double pushbutton actuator, momentary, Front dimension 57.7 x 29.8 mm						
2 lenses, level with front ring	Metal sandgrey	Plastic green-red	B	45-2J31.36T0.000	1	0.043 kg
 Double pushbutton actuator, momentary, Front dimension 57.7 x 29.8 mm						
2 lenses, level with front ring	Metal sandgrey	Plastic white-black	B	45-2J31.36V0.000	1	0.043 kg
 Double pushbutton actuator, momentary, Front dimension 57.7 x 29.8 mm						
2 lenses, level with/raised above front ring	Metal sandgrey	Plastic green-red	B	45-2J31.35T0.000	1	0.043 kg
 Double pushbutton actuator, momentary, Front dimension 57.7 x 29.8 mm						
2 lenses, level with front ring	Metal silver	Plastic green-red	B	45-2J31.26T0.000	1	0.068 kg
 Double pushbutton actuator, momentary, Front dimension 57.7 x 29.8 mm						
2 lenses, level with front ring	Metal silver	Plastic white-black	B	45-2J31.26V0.000	1	0.068 kg
 Double pushbutton actuator, momentary, Front dimension 57.7 x 29.8 mm						
2 lenses, level with/raised above front ring	Metal silver	Plastic green-red	B	45-2J31.25T0.000	1	0.068 kg
 Double pushbutton actuator, momentary, Front dimension 57.7 x 29.8 mm						
2 lenses, level with/raised above front ring	Metal silver	Plastic white-black	B	45-2J31.25V0.000	1	0.068 kg

Switching action: B = Momentary




Illuminated double pushbutton, IP66, IP67, IP69K

Equipment consisting of (schematic overview)

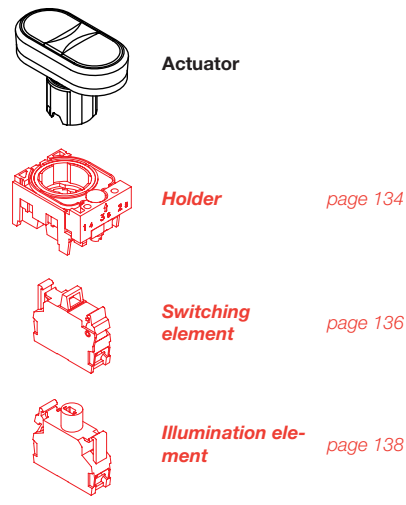


Each Part Number listed below includes all the black components shown in the 3D-drawing.

To obtain a complete unit, please select the red components from the pages shown.

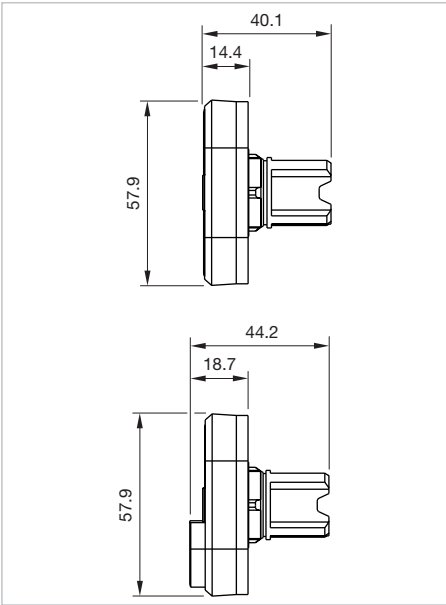

Dimensions [mm]

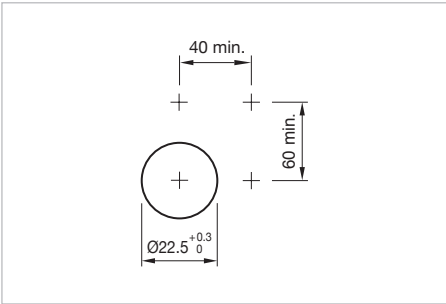

Mounting cut-outs [mm]



Product can differ from the current configuration.

Additional Information

- Mounting depth incl. front plate, see chapter «drawings»
- With illuminative centre window


Product attribute	Front ring	Lens	Switching action	Part No.	Compo- nent layout	Wiring dia- gram	Weight
	Illuminated double pushbutton actuator, Momentary, Front dimension 57.7 x 29.8 mm						
2 lenses, level with front ring	Plastic black	Plastic green-red	B	45-2K31.16T0.000	4	1	0.025 kg
	Illuminated double pushbutton actuator, Momentary, Front dimension 57.7 x 29.8 mm						
2 lenses, level with front ring	Plastic black	Plastic white-black	B	45-2K31.16V0.000	4	1	0.025 kg
	Illuminated double pushbutton actuator, Momentary, Front dimension 57.7 x 29.8 mm						
2 lenses, level with/raised above front ring	Plastic black	Plastic green-red	B	45-2K31.15T0.000	4	1	0.025 kg

45 Raised design

Product attribute	Front ring	Lens	Switching action	Part No.	Component layout	Wiring diagram	Weight
 Illuminated double pushbutton actuator, Momentary, Front dimension 57.7 x 29.8 mm							
2 lenses, level with/raised above front ring	Plastic black	Plastic white-black	B	45-2K31.15V0.000	4	1	0.025 kg
 Illuminated double pushbutton actuator, Momentary, Front dimension 57.7 x 29.8 mm							
2 lenses, level with front ring	Metal sandgrey	Plastic green-red	B	45-2K31.36T0.000	4	1	0.043 kg
 Illuminated double pushbutton actuator, Momentary, Front dimension 57.7 x 29.8 mm							
2 lenses, level with front ring	Metal sandgrey	Plastic white-black	B	45-2K31.36V0.000	4	1	0.043 kg
 Illuminated double pushbutton actuator, Momentary, Front dimension 57.7 x 29.8 mm							
2 lenses, level with/raised above front ring	Metal sandgrey	Plastic green-red	B	45-2K31.35T0.000	4	1	0.043 kg
 Illuminated double pushbutton actuator, Momentary, Front dimension 57.7 x 29.8 mm							
2 lenses, level with/raised above front ring	Metal sandgrey	Plastic white-black	B	45-2K31.35V0.000	4	1	0.043 kg


Switching action: B = Momentary

The component layouts you will find from page 149




Emergency-stop switch foolproof, EN IEC 60947-5-5, IP66, IP67, IP69K

Equipment consisting of (schematic overview)

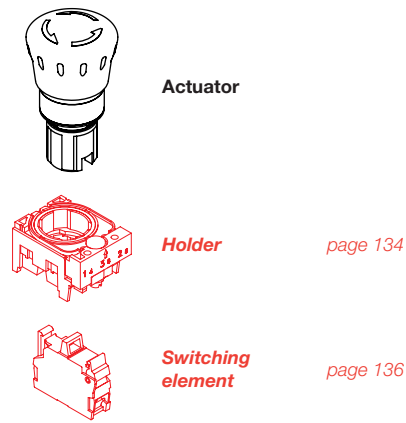


Each Part Number listed below includes all the black components shown in the 3D-drawing.

To obtain a complete unit, please select the red components from the pages shown.

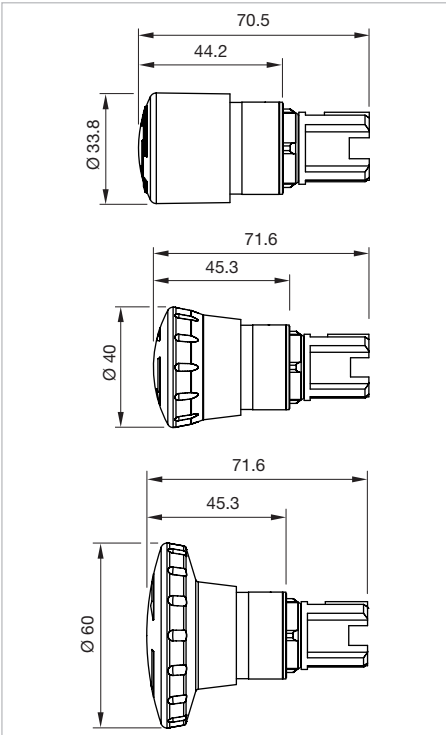

Dimensions [mm]

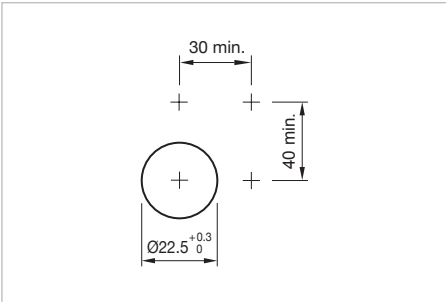

Mounting cut-outs [mm]



Product can differ from the current configuration.

Additional Information


- Mounting depth incl. front plate, see chapter «drawings»
- The standard lock: RONIS, T254
- Two keys are supplied with each key lock switch

Product attribute	Front ring	Lens	Switching action	Part No.	Wiring diagram	Weight
	Emergency-stop switch actuator, foolproof EN IEC 60947-5-5, Front dimension Ø 33.8 mm					
twist to release	Plastic black	Plastic red	C	45-2C36.1820.000	1	0.046 kg
	Emergency-stop switch actuator, foolproof EN IEC 60947-5-5, Front dimension Ø 40 mm					
twist to release	Plastic black	Plastic red	C	45-2C36.1920.000	1	0.046 kg

45 Raised design


Product attribute	Front ring	Lens	Switching action	Part No.	Wiring diagram	Weight
 Emergency-stop switch actuator, foolproof EN IEC 60947-5-5, Front dimension Ø 40 mm						
Pull release	Plastic black	Plastic red	C	45-2C37.1920.000	1	0.046 kg
 Emergency-stop switch actuator, foolproof EN IEC 60947-5-5, Front dimension Ø 60 mm						
twist to release	Plastic black	Plastic red	C	45-2C36.1A20.000	1	0.056 kg
 Emergency-stop switch actuator, foolproof EN IEC 60947-5-5, Front dimension Ø 40 mm						
key to release	Plastic black	Plastic red	C	45-2C35.1920.110	1	0.083 kg
 Emergency-stop switch actuator, foolproof EN IEC 60947-5-5, Front dimension Ø 33.8 mm						
twist to release	Metal silver	Plastic red	C	45-2C36.2820.000	1	0.056 kg
 Emergency-stop switch actuator, foolproof EN IEC 60947-5-5, Front dimension Ø 40 mm						
twist to release	Metal silver	Plastic red	C	45-2C36.2920.000	1	0.046 kg
 Emergency-stop switch actuator, foolproof EN IEC 60947-5-5, Front dimension Ø 40 mm						
key to release	Metal silver	Plastic red	C	45-2C35.2920.110	1	0.083 kg

Switching action: C = Maintained




Emergency-stop switch, illuminated, foolproof EN IEC 60947-5-5, IP66, IP67, IP69K

Equipment consisting of (schematic overview)



Actuator



Holder *page 134*




Switching element *page 136*



Illumination element *page 138*

Each Part Number listed below includes all the black components shown in the 3D-drawing.


To obtain a complete unit, please select the red components from the pages shown.

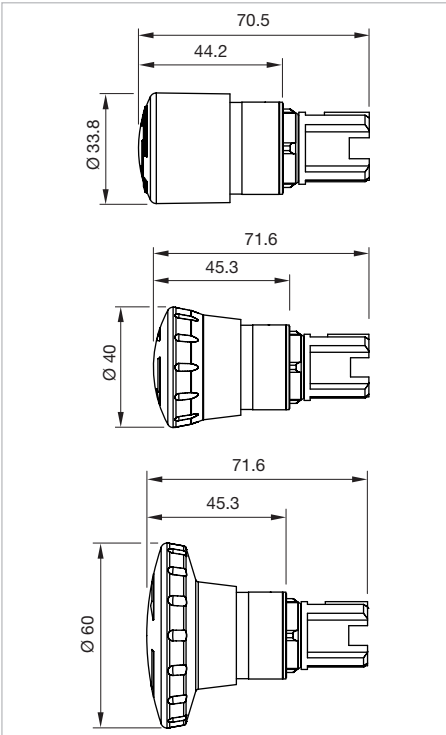

Dimensions mm]



Product can differ from the current configuration.

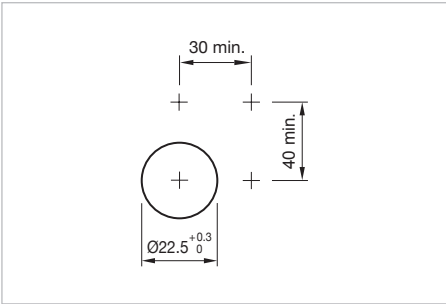

Mounting cut-outs[mm]


- Additional Information**
- Mounting depth incl. front plate, see chapter «drawings»
 - The standard lock: RONIS, T254
 - Two keys are supplied with each key lock switch

Product attribute	Front ring	Lens	Switching action	Part No.	Wiring diagram	Weight
 Emergency-stop switch actuator, foolproof EN IEC 60947-5-5, Front dimension Ø 33.8 mm						
twist to release, illuminable	Plastic black	Plastic red	C	45-2D36.1820.000	1	0.046 kg
 Emergency-stop switch actuator, foolproof EN IEC 60947-5-5, Front dimension Ø 33.8 mm						
twist to release, illuminable	Metal silver	Plastic red	C	45-2D36.2820.000	1	0.046 kg

45 Raised design


Product attribute	Front ring	Lens	Switching action	Part No.	Wiring diagram	Weight
 Emergency-stop switch actuator, foolproof EN IEC 60947-5-5, Front dimension Ø 40 mm						
twist to release, illuminable	Plastic black	Plastic red	C	45-2D36.1920.000	1	0.046 kg
 Emergency-stop switch actuator, foolproof EN IEC 60947-5-5, Front dimension Ø 60 mm						
twist to release, illuminable	Plastic black	Plastic red	C	45-2D36.1A20.000	1	0.053 kg
 Emergency-stop switch actuator, foolproof EN IEC 60947-5-5, Front dimension Ø 40 mm						
twist to release, illuminable	Metal silver	Plastic red	C	45-2D36.2920.000	1	0.046 kg
 Emergency-stop switch actuator, foolproof EN IEC 60947-5-5, Front dimension Ø 60 mm						
twist to release, illuminable	Metal silver	Plastic red	C	45-2D36.2A20.000	1	0.053 kg

Switching action: C = Maintained




Stop switch actuator, foolproof, IP66, IP67, IP69K

Equipment consisting of (schematic overview)

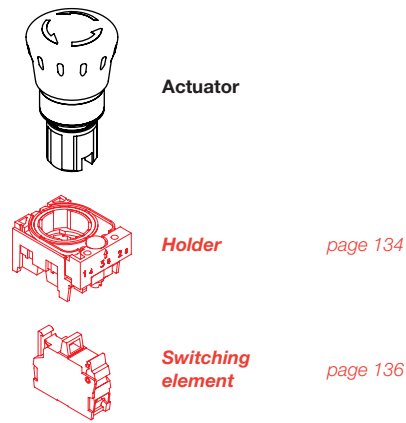

Each Part Number listed below includes all the black components shown in the 3D-drawing.


To obtain a complete unit, please select the red components from the pages shown.

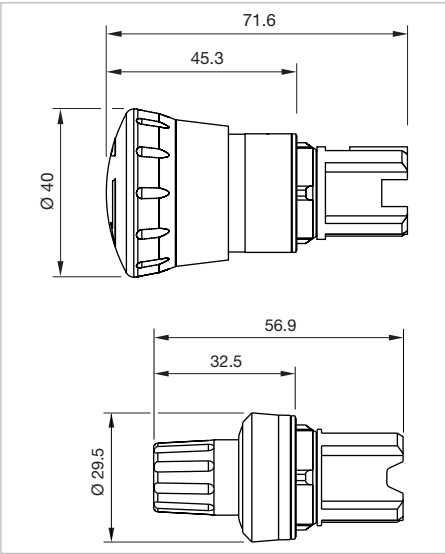

Dimensions [mm]



Product can differ from the current configuration.

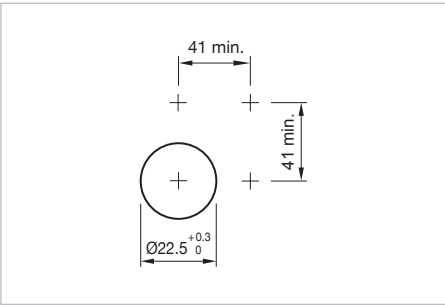

Mounting cut-outs [mm]

Additional Information

- Mounting depth incl. front plate, see chapter «drawings»

Product attribute	Front ring	Lens	Switching action	Lever	Part No.	Wiring diagram	Weight
	Stop switch actuator, foolproof, Front dimension Ø 40 mm						
twist to release	Plastic black	Plastic black	C	–	45-2736.1910.000	1	0.036 kg
	Stop switch actuator, foolproof, Front dimension Ø 40 mm						
twist to release	Plastic black	Plastic blue	C	–	45-2736.1960.000	1	0.046 kg
	Stop switch actuator, foolproof, Front dimension Ø 40 mm						
twist to release	Metal silver	Plastic black	C		45-2C36.2910.000	1	0.036 kg

45

Raised design

Product attribute	Front ring	Lens	Switching action	Lever	Part No.	Wiring diagram	Weight
 Stop switch actuator, foolproof, Front dimension Ø 29.5 mm							
twist to release, can be latched after pressing by rotating to the right	Plastic black	–	C	Plastic black	45-2729.1010.000	1	0.018 kg
 Stop switch actuator, foolproof, Front dimension Ø 29.5 mm							
twist to release, can be latched after pressing by rotating to the right	Plastic black	–	C	Plastic red	45-2729.1020.000	1	0.018 kg


Switching action: C = Maintain



Wiring diagram 1


Mushroom-head pushbutton Ø 30 mm, IP66, IP67, IP69K

Equipment consisting of (schematic overview)

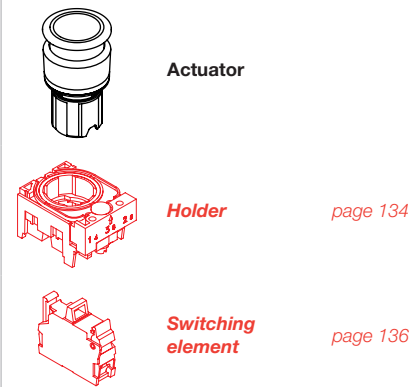


Each Part Number listed below includes all the black components shown in the 3D-drawing.

To obtain a complete unit, please select the red components from the pages shown.

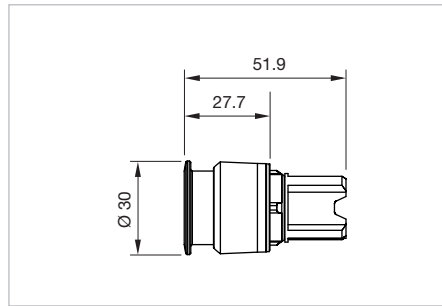

Dimensions [mm]

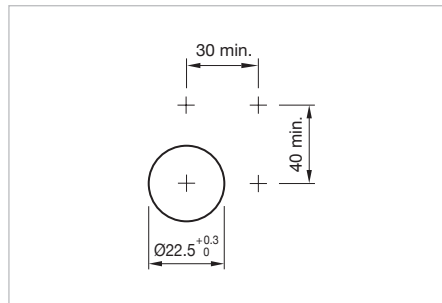

Mounting cut-outs [mm]



Product can differ from the current configuration.

Additional Information

- Mounting depth incl. front plate, see chapter «drawings»

Front ring	Lens	Housing material	Switching action	Part No.	Wiring diagram	Weight
 Mushroom-head pushbutton actuator, Maintain, Front dimension Ø 30 mm						
Plastic black	Plastic black	Plastic	C	45-2530.1810.000	2	0.020 kg
 Mushroom-head pushbutton actuator, Maintain, Front dimension Ø 30 mm						
Plastic black	Plastic red	Plastic	C	45-2530.1820.000	2	0.020 kg
 Mushroom-head pushbutton actuator, Maintain, Front dimension Ø 30 mm						
Plastic black	Plastic yellow	Plastic	C	45-2530.1840.000	2	0.020 kg
 Mushroom-head pushbutton actuator, Momentary, Front dimension Ø 30 mm						
Plastic black	Plastic black	Plastic	B	45-2531.1810.000	1	0.020 kg
 Mushroom-head pushbutton actuator, Momentary, Front dimension Ø 30 mm						
Plastic black	Plastic red	Plastic	B	45-2531.1820.000	1	0.020 kg

45 Raised design

Front ring	Lens	Housing material	Switching action	Part No.	Wiring diagram	Weight
 Mushroom-head pushbutton actuator, Momentary, Front dimension Ø 30 mm						
Plastic black	Plastic yellow	Plastic	B	45-2531.1840.000	1	0.020 kg
 Mushroom-head pushbutton actuator, Momentary, Front dimension Ø 30 mm						
Plastic black	Plastic green	Plastic	B	45-2531.1850.000	1	0.020 kg
 Mushroom-head pushbutton actuator, Maintain, Front dimension Ø 30 mm						
Metal sandgrey	Plastic black	Plastic	C	45-2530.3810.000	2	0.034 kg
 Mushroom-head pushbutton actuator, Maintain, Front dimension Ø 30 mm						
Metal sandgrey	Plastic red	Plastic	C	45-2530.3820.000	2	0.034 kg
 Mushroom-head pushbutton actuator, Momentary, Front dimension Ø 30 mm						
Metal sandgrey	Plastic black	Plastic	B	45-2531.3810.000	1	0.034 kg
 Mushroom-head pushbutton actuator, Momentary, Front dimension Ø 30 mm						
Metal sandgrey	Plastic red	Plastic	B	45-2531.3820.000	1	0.034 kg
 Mushroom-head pushbutton actuator, Momentary, Front dimension Ø 30 mm						
Metal sandgrey	Plastic yellow	Plastic	B	45-2531.3840.000	1	0.034 kg
 Mushroom-head pushbutton actuator, Momentary, Front dimension Ø 30 mm						
Metal sandgrey	Plastic green	Plastic	B	45-2531.3850.000	1	0.034 kg
 Mushroom-head pushbutton actuator, Maintain, Front dimension Ø 30 mm						
Metal silver	Plastic black	Metal	C	45-2530.2810.000	2	0.052 kg

Front ring	Lens	Housing material	Switching action	Part No.	Wiring diagram	Weight
 Mushroom-head pushbutton actuator, Maintain, Front dimension Ø 30 mm						
Metal silver	Plastic red	Metal	C	45-2530.2820.000	2	0.052 kg
 Mushroom-head pushbutton actuator, Momentary, Front dimension Ø 30 mm						
Metal silver	Plastic black	Metal	B	45-2531.2810.000	1	0.052 kg
 Mushroom-head pushbutton actuator, Momentary, Front dimension Ø 30 mm						
Metal silver	Plastic red	Metal	B	45-2531.2820.000	1	0.052 kg
 Mushroom-head pushbutton actuator, Momentary, Front dimension Ø 30 mm						
Metal silver	Plastic yellow	Metal	B	45-2531.2840.000	1	0.052 kg
 Mushroom-head pushbutton actuator, Momentary, Front dimension Ø 30 mm						
Metal silver	Plastic green	Metal	B	45-2531.2850.000	1	0.052 kg

Switching action: B = Momentary, C = Maintain


	
Wiring diagram 1	Wiring diagram 2

45 Raised design

Mushroom-head pushbutton Ø 40 mm, IP66, IP67, IP69K





Product can differ from the current configuration.

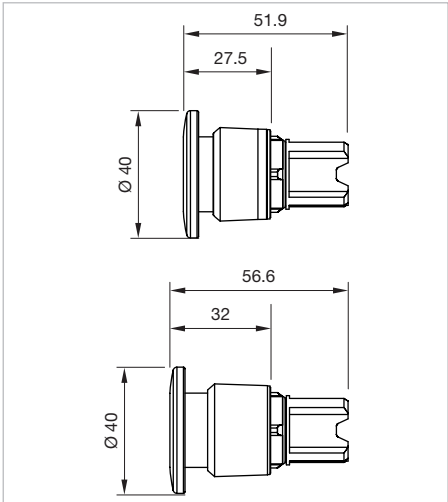

Dimensions [mm]

Equipment consisting of (schematic overview)

**Actuator**

**Holder** page 134


**Switching element** page 136

Each Part Number listed below includes all the black components shown in the 3D-drawing.

To obtain a complete unit, please select the red components from the pages shown.

Additional Information

- Mounting depth incl. front plate, see chapter «drawings»

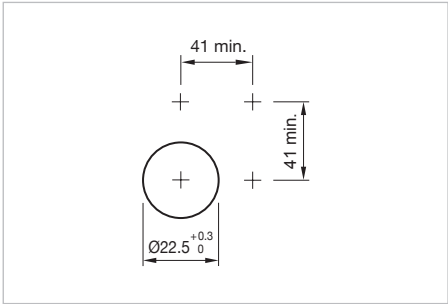

Mounting cut-outs [mm]

Front ring	Lens	Housing material	Switching action	Part No.	Wiring diagram	Weight
	Mushroom-head pushbutton actuator, Maintain, Front dimension Ø 40 mm					
Plastic black	Plastic black	Plastic	C	45-2530.1910.000	2	0.022 kg
	Mushroom-head pushbutton actuator, Maintain, Front dimension Ø 40 mm					
Plastic black	Plastic red	Plastic	C	45-2530.1920.000	2	0.020 kg
	Mushroom-head pushbutton actuator, Maintain, Front dimension Ø 40 mm					
Plastic black	Plastic yellow	Plastic	C	45-2530.1940.000	2	0.020 kg
	Mushroom-head pushbutton actuator, Maintain, Front dimension Ø 40 mm					
Plastic black	Plastic green	Plastic	C	45-2530.1950.000	2	0.020 kg


Front ring	Lens	Housing material	Switching action	Part No.	Wiring diagram	Weight
	Mushroom-head pushbutton actuator, Momentary, Front dimension Ø 40 mm					
Plastic black	Plastic black	Plastic	B	45-2531.1910.000	1	0.020 kg
	Mushroom-head pushbutton actuator, Momentary, Front dimension Ø 40 mm					
Plastic black	Plastic red	Plastic	B	45-2531.1920.000	1	0.020 kg
	Mushroom-head pushbutton actuator, Momentary, Front dimension Ø 40 mm					
Plastic black	Plastic yellow	Plastic	B	45-2531.1940.000	1	0.020 kg
	Mushroom-head pushbutton actuator, Momentary, Front dimension Ø 40 mm					
Plastic black	Plastic green	Plastic	B	45-2531.1950.000	1	0.020 kg
	Mushroom-head pushbutton actuator, Maintain, Front dimension Ø 40 mm					
Metal sandgrey	Plastic black	Plastic	C	45-2530.3910.000	2	0.034 kg
	Mushroom-head pushbutton actuator, Maintain, Front dimension Ø 40 mm					
Metal sandgrey	Plastic red	Plastic	C	45-2530.3920.000	2	0.034 kg
	Mushroom-head pushbutton actuator, Momentary, Front dimension Ø 40 mm					
Metal sandgrey	Plastic black	Plastic	B	45-2531.3910.000	1	0.034 kg
	Mushroom-head pushbutton actuator, Momentary, Front dimension Ø 40 mm					
Metal sandgrey	Plastic red	Plastic	B	45-2531.3920.000	1	0.034 kg
	Mushroom-head pushbutton actuator, Momentary, Front dimension Ø 40 mm					
Metal sandgrey	Plastic yellow	Plastic	B	45-2531.3940.000	1	0.034 kg

45 Raised design

Front ring	Lens	Housing material	Switching action	Part No.	Wiring diagram	Weight
 Mushroom-head pushbutton actuator, Momentary, Front dimension Ø 40 mm						
Metal sandgrey	Plastic green	Plastic	B	45-2531.3950.000	1	0.034 kg
 Mushroom-head pushbutton actuator, Maintain, Front dimension Ø 40 mm						
Metal silver	Plastic black	Metal	C	45-2530.2910.000	2	0.052 kg
 Mushroom-head pushbutton actuator, Maintain, Front dimension Ø 40 mm						
Metal silver	Plastic red	Metal	C	45-2530.2920.000	2	0.052 kg
 Mushroom-head pushbutton actuator, Maintain, Front dimension Ø 40 mm						
Metal silver	Plastic yellow	Metal	C	45-2530.2940.000	2	0.052 kg
 Mushroom-head pushbutton actuator, Momentary, Front dimension Ø 40 mm						
Metal silver	Plastic black	Metal	B	45-2531.2910.000	1	0.052 kg
 Mushroom-head pushbutton actuator, Momentary, Front dimension Ø 40 mm						
Metal silver	Plastic red	Metal	B	45-2531.2920.000	1	0.052 kg
 Mushroom-head pushbutton actuator, Momentary, Front dimension Ø 40 mm						
Metal silver	Plastic yellow	Metal	B	45-2531.2940.000	1	0.052 kg
 Mushroom-head pushbutton actuator, Momentary, Front dimension Ø 40 mm						
Metal silver	Plastic green	Metal	B	45-2531.2950.000	1	0.052 kg
 Mushroom-head pushbutton actuator, momentary/maintain, Front dimension Ø 40 mm						
Metal silver	Plastic black	Metal	B/C	45-2532.2910.000	3	0.052 kg

Front ring	Lens	Housing material	Switching action	Part No.	Wiring diagram	Weight
 Mushroom-head pushbutton actuator, momentary/maintain, Front dimension Ø 40 mm						
Metal silver	Plastic red	Metal	B/C	45-2532.2920.000	3	0.052 kg
 Mushroom-head pushbutton actuator, momentary/momentary, Front dimension Ø 40 mm						
Metal silver	Plastic black	Metal	B/B	45-2533.2910.000	4	0.052 kg
 Mushroom-head pushbutton actuator, momentary/momentary, Front dimension Ø 40 mm						
Metal silver	Plastic red	Metal	B/B	45-2533.2920.000	4	0.052 kg

Switching action: B = Momentary, C = Maintain, B/B = Momentary/Momentary, B/C = Momentary/Maintain


			
Wiring diagram 1	Wiring diagram 2	Wiring diagram 3	Wiring diagram 4

45 Raised design

Mushroom-head pushbutton Ø 60 mm, IP66, IP67, IP69K




Product can differ from the current configuration.

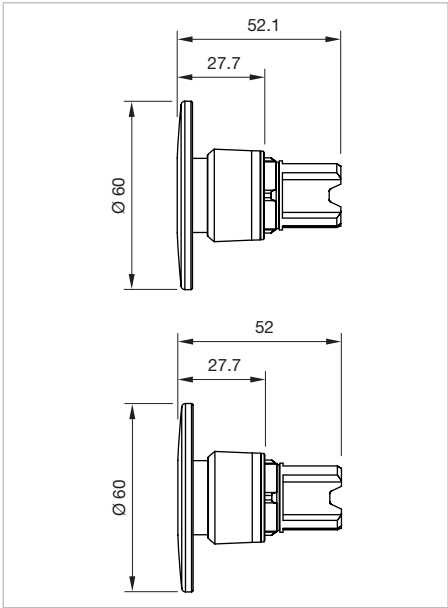


Dimensions [mm]

Equipment consisting of (schematic overview)




Actuator



Holder

page 134



Switching element


page 136

Each Part Number listed below includes all the black components shown in the 3D-drawing.

To obtain a complete unit, please select the red components from the pages shown.

Additional Information

- Mounting depth incl. front plate, see chapter «drawings»

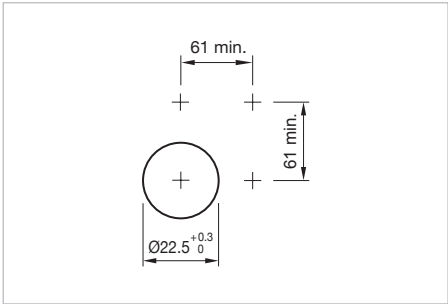

Mounting cut-outs [mm]

Front ring	Lens	Housing material	Switching action	Part No.	Wiring diagram	Weight
	Mushroom-head pushbutton actuator, Maintain, Front dimension Ø 60 mm					
Plastic black	Plastic black	Plastic	C	45-2530.1A10.000	2	0.022 kg
	Mushroom-head pushbutton actuator, Maintain, Front dimension Ø 60 mm					
Plastic black	Plastic red	Plastic	C	45-2530.1A20.000	2	0.020 kg
	Mushroom-head pushbutton actuator, Momentary, Front dimension Ø 60 mm					
Plastic black	Plastic black	Plastic	B	45-2531.1A10.000	1	0.020 kg
	Mushroom-head pushbutton actuator, Momentary, Front dimension Ø 60 mm					
Plastic black	Plastic red	Plastic	B	45-2531.1A20.000	1	0.020 kg

Front ring	Lens	Housing material	Switching action	Part No.	Wiring diagram	Weight
 Mushroom-head pushbutton actuator, Momentary, Front dimension Ø 60 mm						
Plastic black	Plastic yellow	Plastic	B	45-2531.1A40.000	1	0.020 kg
 Mushroom-head pushbutton actuator, Momentary, Front dimension Ø 60 mm						
Plastic black	Plastic green	Plastic	B	45-2531.1A50.000	1	0.020 kg
 Mushroom-head pushbutton actuator, Maintain, Front dimension Ø 60 mm						
Metal silver	Plastic black	Metal	C	45-2530.2A10.000	2	0.052 kg
 Mushroom-head pushbutton actuator, Maintain, Front dimension Ø 60 mm						
Metal silver	Plastic red	Metal	C	45-2530.2A20.000	2	0.052 kg
 Mushroom-head pushbutton actuator, Momentary, Front dimension Ø 60 mm						
Metal silver	Plastic black	Metal	B	45-2531.2A10.000	1	0.052 kg
 Mushroom-head pushbutton actuator, Momentary, Front dimension Ø 60 mm						
Metal silver	Plastic red	Metal	B	45-2531.2A20.000	1	0.052 kg
 Mushroom-head pushbutton actuator, Momentary, Front dimension Ø 60 mm						
Metal silver	Plastic yellow	Metal	B	45-2531.2A40.000	1	0.052 kg
 Mushroom-head pushbutton actuator, Momentary, Front dimension Ø 60 mm						
Metal silver	Plastic green	Metal	B	45-2531.2A50.000	1	0.052 kg

Switching action: B = Momentary, C = Maintain


	
Wiring diagram 1	Wiring diagram 2

45 Raised design

Mushroom-head pushbutton Ø 30 mm, illuminated, IP66, IP67, IP69K




Product can differ from the current configuration.

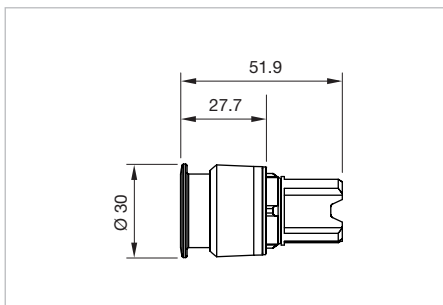

Dimensions [mm]


Additional Information

- Mounting depth incl. front plate, see chapter «drawings»

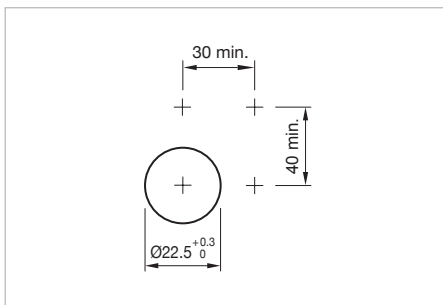

Mounting cut-outs [mm]

Equipment consisting of (schematic overview)

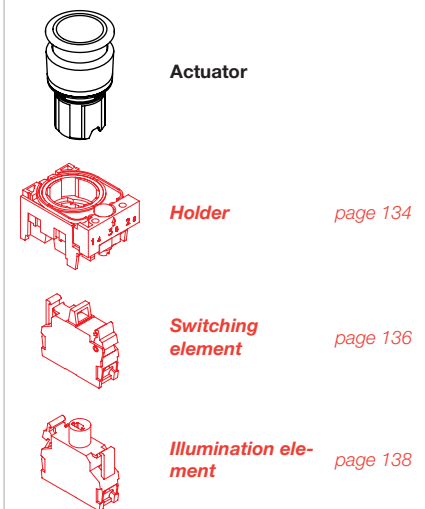

Each Part Number listed below includes all the black components shown in the 3D-drawing.

To obtain a complete unit, please select the red components from the pages shown.

Front ring	Lens	Housing material	Switching action	Part No.	Wiring diagram	Weight
 Mushroom-head pushbutton actuator, Maintain, Front dimension Ø 30 mm						
Plastic black	Plastic red transparent	Plastic	C	45-2630.18E0.000	1	0.027 kg
 Mushroom-head pushbutton actuator, Maintain, Front dimension Ø 30 mm						
Plastic black	Plastic yellow transparent	Plastic	C	45-2630.18G0.000	1	0.027 kg
 Mushroom-head pushbutton actuator, Maintain, Front dimension Ø 30 mm						
Plastic black	Plastic green transparent	Plastic	C	45-2630.18H0.000	1	0.027 kg
 Mushroom-head pushbutton actuator, Maintain, Front dimension Ø 30 mm						
Plastic black	Plastic blue transparent	Plastic	C	45-2630.18J0.000	1	0.027 kg
 Mushroom-head pushbutton actuator, Maintain, Front dimension Ø 30 mm						
Plastic black	Plastic colourless transparent	Plastic	C	45-2630.18K0.000	1	0.027 kg


Front ring	Lens	Housing material	Switching action	Part No.	Wiring diagram	Weight
 Mushroom-head pushbutton actuator, Momentary, Front dimension Ø 30 mm						
Plastic black	Plastic red transparent	Plastic	B	45-2631.18E0.000	2	0.033 kg
 Mushroom-head pushbutton actuator, Momentary, Front dimension Ø 30 mm						
Plastic black	Plastic yellow transparent	Plastic	B	45-2631.18G0.000	2	0.033 kg
 Mushroom-head pushbutton actuator, Momentary, Front dimension Ø 30 mm						
Plastic black	Plastic green transparent	Plastic	B	45-2631.18H0.000	2	0.033 kg
 Mushroom-head pushbutton actuator, Momentary, Front dimension Ø 30 mm						
Plastic black	Plastic blue transparent	Plastic	B	45-2631.18J0.000	2	0.033 kg
 Mushroom-head pushbutton actuator, Momentary, Front dimension Ø 30 mm						
Plastic black	Plastic colourless transparent	Plastic	B	45-2631.18K0.000	2	0.033 kg
 Mushroom-head pushbutton actuator, Momentary, Front dimension Ø 30 mm						
Plastic black	Plastic white transparent	Plastic	B	45-2631.18N0.000	2	0.033 kg
 Mushroom-head pushbutton actuator, Maintain, Front dimension Ø 30 mm						
Metal sandgrey	Plastic red transparent	Plastic	C	45-2630.38E0.000	1	0.034 kg
 Mushroom-head pushbutton actuator, Maintain, Front dimension Ø 30 mm						
Metal sandgrey	Plastic yellow transparent	Plastic	C	45-2630.38G0.000	1	0.034 kg
 Mushroom-head pushbutton actuator, Momentary, Front dimension Ø 30 mm						
Metal sandgrey	Plastic yellow transparent	Plastic	B	45-2631.38G0.000	2	0.026 kg

45 Raised design

Front ring	Lens	Housing material	Switching action	Part No.	Wiring diagram	Weight
 Mushroom-head pushbutton actuator, Momentary, Front dimension Ø 30 mm						
Metal sandgrey	Plastic red transparent	Plastic	B	45-2631.38H0.000	2	0.026 kg
 Mushroom-head pushbutton actuator, Momentary, Front dimension Ø 30 mm						
Metal sandgrey	Plastic colourless transparent	Plastic	B	45-2631.38K0.000	2	0.026 kg
 Mushroom-head pushbutton actuator, Momentary, Front dimension Ø 30 mm						
Metal sandgrey	Plastic white transparent	Plastic	B	45-2631.38N0.000	2	0.026 kg
 Mushroom-head pushbutton actuator, Maintain, Front dimension Ø 30 mm						
Metal silver	Plastic amber transparency	Metal	C	45-2630.28F0.000	1	0.052 kg
 Mushroom-head pushbutton actuator, Maintain, Front dimension Ø 30 mm						
Metal silver	Plastic red transparent	Metal	C	45-2630.28E0.000	1	0.052 kg
 Mushroom-head pushbutton actuator, Maintain, Front dimension Ø 30 mm						
Metal silver	Plastic yellow transparent	Metal	C	45-2630.28G0.000	1	0.052 kg
 Mushroom-head pushbutton actuator, Maintain, Front dimension Ø 30 mm						
Metal silver	Plastic green transparent	Metal	C	45-2630.28H0.000	1	0.052 kg
 Mushroom-head pushbutton actuator, Maintain, Front dimension Ø 30 mm						
Metal silver	Plastic blue transparent	Metal	C	45-2630.28J0.000	1	0.052 kg
 Mushroom-head pushbutton actuator, Maintain, Front dimension Ø 30 mm						
Metal silver	Plastic colourless transparent	Metal	C	45-2630.28K0.000	1	0.052 kg


Front ring	Lens	Housing material	Switching action	Part No.	Wiring diagram	Weight
 Mushroom-head pushbutton actuator, Momentary, Front dimension Ø 30 mm						
Metal silver	Plastic yellow transparent	Metal	B	45-2631.28G0.000	2	0.041 kg
 Mushroom-head pushbutton actuator, Momentary, Front dimension Ø 30 mm						
Metal silver	Plastic green transparent	Metal	B	45-2631.28H0.000	2	0.041 kg
 Mushroom-head pushbutton actuator, Momentary, Front dimension Ø 30 mm						
Metal silver	Plastic white transparent	Metal	B	45-2631.28N0.000	2	0.041 kg

Switching action: B = Momentary, C = Maintain




45 Raised design

Mushroom-head pushbutton Ø 40 mm, illuminated, IP66, IP67, IP69K

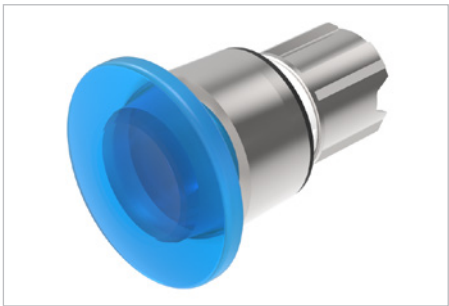


Product can differ from the current configuration.

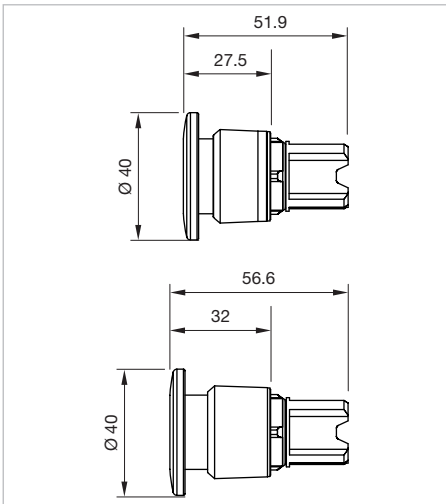


Dimensions [mm]

Equipment consisting of (schematic overview)



Actuator




Holder

page 134



Switching element

page 136



Illumination element


page 138

Each Part Number listed below includes all the black components shown in the 3D-drawing.

To obtain a complete unit, please select the red components from the pages shown.


Additional Information

- Mounting depth incl. front plate, see chapter «drawings»

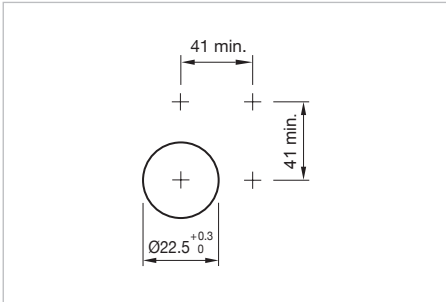

Mounting cut-outs [mm]

Front ring	Lens	Housing material	Switching action	Part No.	Wiring diagram	Weight
	Mushroom-head pushbutton actuator, Maintain, Front dimension Ø 40 mm					
Plastic black	Plastic red transparent	Plastic	C	45-2630.19E0.000	1	0.028 kg
	Mushroom-head pushbutton actuator, Maintain, Front dimension Ø 40 mm					
Plastic black	Plastic yellow transparent	Plastic	C	45-2630.19G0.000	1	0.028 kg
	Mushroom-head pushbutton actuator, Maintain, Front dimension Ø 40 mm					
Plastic black	Plastic green transparent	Plastic	C	45-2630.19H0.000	1	0.028 kg
	Mushroom-head pushbutton actuator, Maintain, Front dimension Ø 40 mm					
Plastic black	Plastic blue transparent	Plastic	C	45-2630.19J0.000	1	0.028 kg


Front ring	Lens	Housing material	Switching action	Part No.	Wiring diagram	Weight
 Mushroom-head pushbutton actuator, Maintain, Front dimension Ø 40 mm						
Plastic black	Plastic colourless transparent	Plastic	C	45-2630.19K0.000	1	0.028 kg
 Mushroom-head pushbutton actuator, Momentary, Front dimension Ø 40 mm						
Plastic black	Plastic yellow transparent	Plastic	B	45-2631.19G0.000	2	0.019 kg
 Mushroom-head pushbutton actuator, Momentary, Front dimension Ø 40 mm						
Plastic black	Plastic green transparent	Plastic	B	45-2631.19H0.000	2	0.019 kg
 Mushroom-head pushbutton actuator, Momentary, Front dimension Ø 40 mm						
Plastic black	Plastic colourless transparent	Plastic	B	45-2631.19K0.000	2	0.019 kg
 Mushroom-head pushbutton actuator, Momentary, Front dimension Ø 40 mm						
Plastic black	Plastic white transparent	Plastic	B	45-2631.19N0.000	2	0.019 kg
 Mushroom-head pushbutton actuator, Maintain, Front dimension Ø 40 mm						
Metal sandgrey	Plastic red transparent	Plastic	C	45-2630.39E0.000	1	0.035 kg
 Mushroom-head pushbutton actuator, Maintain, Front dimension Ø 40 mm						
Metal sandgrey	Plastic yellow transparent	Plastic	C	45-2630.39G0.000	1	0.035 kg
 Mushroom-head pushbutton actuator, Momentary, Front dimension Ø 40 mm						
Metal sandgrey	Plastic yellow transparent	Plastic	B	45-2631.39G0.000	2	0.028 kg
 Mushroom-head pushbutton actuator, Momentary, Front dimension Ø 40 mm						
Metal sandgrey	Plastic green transparent	Plastic	B	45-2631.39H0.000	2	0.028 kg

45 Raised design

Front ring	Lens	Housing material	Switching action	Part No.	Wiring diagram	Weight
 Mushroom-head pushbutton actuator, Momentary, Front dimension Ø 40 mm						
Metal sandgrey	Plastic colourless transparent	Plastic	B	45-2631.39K0.000	2	0.028 kg
 Mushroom-head pushbutton actuator, Momentary, Front dimension Ø 40 mm						
Metal sandgrey	Plastic white transparent	Plastic	B	45-2631.39N0.000	2	0.028 kg
 Mushroom-head pushbutton actuator, Maintain, Front dimension Ø 40 mm						
Metal silver	Plastic red transparent	Metal	C	45-2630.29E0.000	1	0.035 kg
 Mushroom-head pushbutton actuator, Maintain, Front dimension Ø 40 mm						
Metal silver	Plastic amber transparency	Metal	C	45-2630.29F0.000	1	0.053 kg
 Mushroom-head pushbutton actuator, Maintain, Front dimension Ø 40 mm						
Metal silver	Plastic yellow transparent	Metal	C	45-2630.29G0.000	1	0.053 kg
 Mushroom-head pushbutton actuator, Maintain, Front dimension Ø 40 mm						
Metal silver	Plastic green transparent	Metal	C	45-2630.29H0.000	1	0.053 kg
 Mushroom-head pushbutton actuator, Maintain, Front dimension Ø 40 mm						
Metal silver	Plastic blue transparent	Metal	C	45-2630.29J0.000	1	0.053 kg
 Mushroom-head pushbutton actuator, Maintain, Front dimension Ø 40 mm						
Metal silver	Plastic colourless transparent	Metal	C	45-2630.29K0.000	1	0.053 kg
 Mushroom-head pushbutton actuator, Momentary, Front dimension Ø 40 mm						
Metal silver	Plastic amber transparency	Metal	B	45-2631.29F0.000	2	0.042 kg

Front ring	Lens	Housing material	Switching action	Part No.	Wiring diagram	Weight
 Mushroom-head pushbutton actuator, Momentary, Front dimension Ø 40 mm						
Metal silver	Plastic yellow transparent	Metal	B	45-2631.29G0.000	2	0.042 kg
 Mushroom-head pushbutton actuator, Momentary, Front dimension Ø 40 mm						
Metal silver	Plastic green transparent	Metal	B	45-2631.29H0.000	2	0.042 kg
 Mushroom-head pushbutton actuator, Momentary, Front dimension Ø 40 mm						
Metal silver	Plastic white transparent	Metal	B	45-2631.29N0.000	2	0.042 kg
 Mushroom-head pushbutton actuator, momentary/maintain, Front dimension Ø 40 mm						
Metal silver	Plastic red transparent	Metal	B/C	45-2632.29E0.000	3	0.051 kg
 Mushroom-head pushbutton actuator, momentary/maintain, Front dimension Ø 40 mm						
Metal silver	Plastic green transparent	Metal	B/C	45-2632.29H0.000	3	0.051 kg
 Mushroom-head pushbutton actuator, momentary/momentary, Front dimension Ø 40 mm						
Metal silver	Plastic red transparent	Metal	B/B	45-2633.29E0.000	4	0.051 kg
 Mushroom-head pushbutton actuator, momentary/momentary, Front dimension Ø 40 mm						
Metal silver	Plastic white transparent	Metal	B/B	45-2633.29N0.000	4	0.051 kg

Switching action: B = Momentary, C = Maintain, B/B = Momentary/Momentary, B/C = Momentary/Maintain

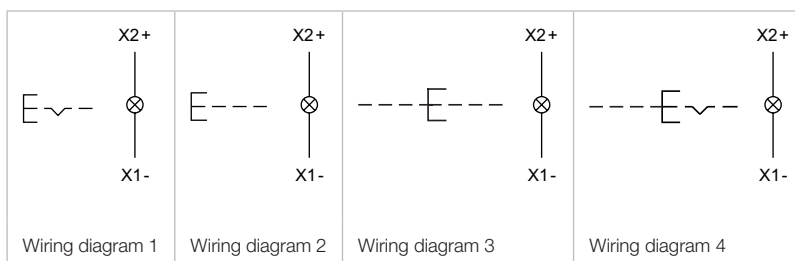


45 Raised design

Mushroom-head pushbutton Ø 60 mm, illuminated, IP66, IP67, IP69K




Product can differ from the current configuration.

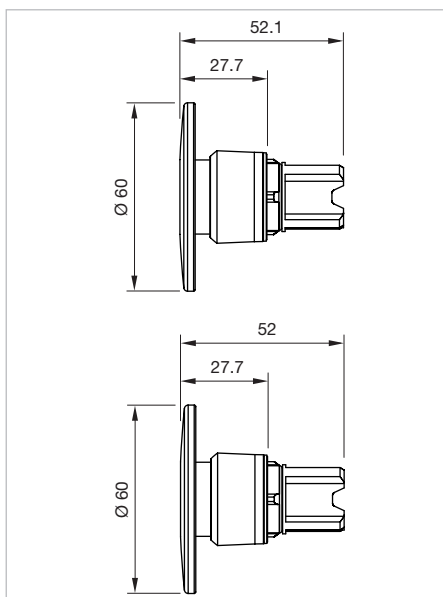

Dimensions [mm]

Equipment consisting of (schematic overview)

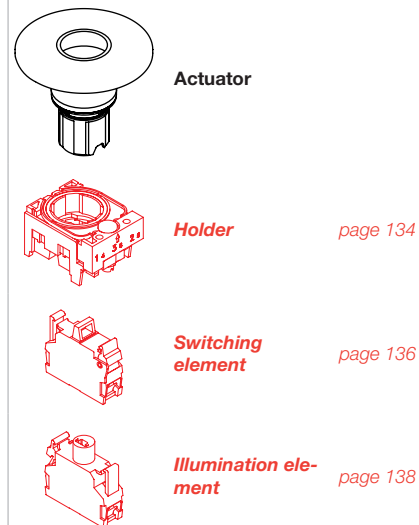


Each Part Number listed below includes all the black components shown in the 3D-drawing.

To obtain a complete unit, please select the red components from the pages shown.

Additional Information

- Mounting depth incl. front plate, see chapter «drawings»

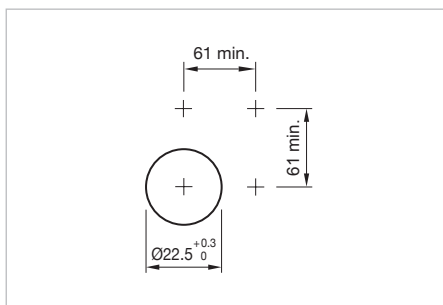


Mounting cut-outs [mm]

Front ring	Lens	Housing material	Switching action	Part No.	Wiring diagram	Weight
 Mushroom-head pushbutton actuator, Maintain, Front dimension Ø 60 mm						
Metal silver	Plastic red transparent	Metal	C	45-2630.2AE0.000	1	0.057 kg
 Mushroom-head pushbutton actuator, Maintain, Front dimension Ø 60 mm						
Metal silver	Plastic yellow transparent	Metal	C	45-2630.2AG0.000	1	0.057 kg
 Mushroom-head pushbutton actuator, Maintain, Front dimension Ø 60 mm						
Metal silver	Plastic green transparent	Metal	C	45-2630.2AH0.000	1	0.057 kg

Front ring	Lens	Housing material	Switching action	Part No.	Wiring diagram	Weight
 Mushroom-head pushbutton actuator, Maintain, Front dimension Ø 60 mm						
Metal silver	Plastic blue transparent	Metal	C	45-2630.2AJ0.000	1	0.057 kg
 Mushroom-head pushbutton actuator, Maintain, Front dimension Ø 60 mm						
Metal silver	Plastic colourless transparent	Metal	C	45-2630.2AK0.000	1	0.057 kg
 Mushroom-head pushbutton actuator, Momentary, Front dimension Ø 60 mm						
Metal silver	Plastic amber transparency	Metal	B	45-2631.2AF0.000	2	0.045 kg
 Mushroom-head pushbutton actuator, Momentary, Front dimension Ø 60 mm						
Metal silver	Plastic yellow transparent	Metal	B	45-2631.2AG0.000	2	0.045 kg
 Mushroom-head pushbutton actuator, Momentary, Front dimension Ø 60 mm						
Metal silver	Plastic green transparent	Metal	B	45-2631.2AH0.000	2	0.045 kg
 Mushroom-head pushbutton actuator, Momentary, Front dimension Ø 60 mm						
Metal silver	Plastic white transparent	Metal	B	45-2631.2AN0.000	2	0.045 kg

Switching action: B = Momentary, C = Maintain




45 Raised design

Keylock switch 2 positions, IP66, IP67, IP69K





Product can differ from the current configuration.

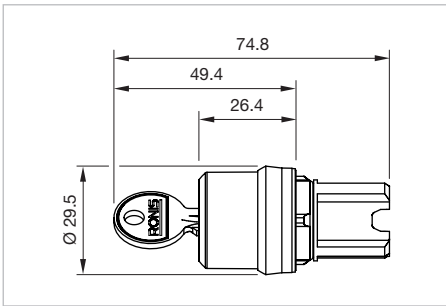


Dimensions [mm]

Equipment consisting of (schematic overview)

**Actuator**


**Holder** page 134

**Switching element** page 136


Each Part Number listed below includes all the black components shown in the 3D-drawing.

To obtain a complete unit, please select the red components from the pages shown.

- Additional Information**
- Mounting depth incl. front plate, see chapter «drawings»
 - The standard lock: RONIS, T254
 - Two keys are supplied with each key lock switch

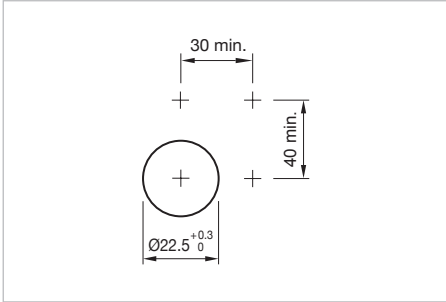

Mounting cut-outs [mm]



Switching positions (A = Rest, B = Momentary, C = Maintained)

Front ring	Housing material	Switching action	Switching angle	Key remove	Part No.	Wiring diagram	Weight
 Keylock switch actuator 2 positions, Front dimension Ø 29.45 mm							
Plastic black	Plastic	A - B	B = 45°	A	45-290K.1000.116	1	0.046 kg
		A - C	C = 90°	A	45-290J.1000.111	2	0.046 kg
		A - C	C = 90°	A + C	45-290H.1000.111	2	0.046 kg
		A - C	C = 90°	A	45-2925.1000.111	2	0.046 kg
 Keylock switch actuator 2 positions, Front dimension Ø 29.45 mm							
Metal sandgrey	Plastic	A - B	B = 45°	A	45-290K.3000.116	1	0.061 kg
		A - C	C = 90°	A	45-290J.3000.111	2	0.061 kg
		A - C	C = 90°	A + C	45-290H.3000.111	2	0.061 kg
		A - C	C = 90°	A	45-2925.3000.111	2	0.061 kg

Front ring	Housing material	Switching action	Switching angle	Key remove	Part No.	Wiring diagram	Weight
 Keylock switch actuator 2 positions, Front dimension Ø 29.45 mm							
Metal silver	Metal	A - B	B = 45°	A	45-290K.2000.116	1	0.080 kg
		A - C	C = 90°	A	45-290J.2000.111	2	0.080 kg
		A - C	C = 90°	A + C	45-290H.2000.111	2	0.080 kg
		A - C	C = 90°	A	45-2925.2000.111	2	0.080 kg

Switching action: A = Rest, B = Momentary, C = Maintain


	
Wiring diagram 1	Wiring diagram 2

45 Raised design

Keylock switch 3 positions, IP66, IP67, IP69K




Product can differ from the current configuration.

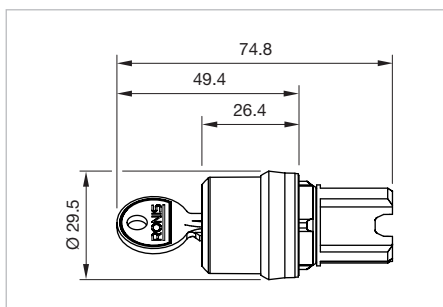

Dimensions [mm]


Additional Information

- Mounting depth incl. front plate, see chapter «drawings»
- The standard lock: RONIS, T254
- Two keys are supplied with each key lock switch

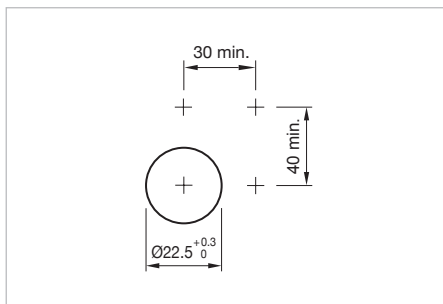


Mounting cut-outs [mm]

Equipment consisting of (schematic overview)



Actuator



Holder

page 134




Switching element

page 136

Each Part Number listed below includes all the black components shown in the 3D-drawing.

To obtain a complete unit, please select the red components from the pages shown.



Switching positions (A = Rest, B = Momentary, C = Maintained)

Front ring	Switching action	Switching angle	Key remove	Part No.	Wiring diagram	Weight
 Keylock switch actuator 3 positions, Front dimension Ø 29.45 mm						
Plastic black	C - A - C	C = 45°	A	45-2924.1000.113	1	0.060 kg
		C = 45°	C + A + C	45-290F.1000.113	1	0.060 kg
		C = 45°	C - -	45-290D.1000.113	1	0.060 kg
		C = 45°	- - C	45-2917.1000.113	1	0.060 kg
		C = 45°	C + C	45-290C.1000.113	1	0.060 kg
		C = 45°	C + A	45-290G.1000.113	1	0.060 kg
	B - A - B	B = 45°	A	45-290Z.1000.113	2	0.060 kg
	C - A - B	C = 45°, B = 45°	A	45-2922.1000.113	3	0.060 kg
		C = 45°, B = 45°	C	45-290A.1000.113	3	0.060 kg
		C = 45°, B = 45°	C + A	45-290E.1000.113	3	0.060 kg
	B - A - C	B = 45°, C = 45°	A	45-2911.1000.113	4	0.060 kg
		B = 45°, C = 45°	C	45-290W.1000.113	4	0.060 kg
		B = 45°, C = 45°	A + C	45-2910.1000.113	4	0.060 kg

Front ring	Switching action	Switching angle	Key remove	Part No.	Wiring diagram	Weight
 Keylock switch actuator 3 positions, Front dimension Ø 29.45 mm						
Metal sandgrey	C - A - C	C = 45°	A	45-2924.3000.113	1	0.061 kg
		C = 45°	C + A + C	45-290F.3000.113	1	0.061 kg
		C = 45°	C - -	45-290D.3000.113	1	0.061 kg
		C = 45°	- - C	45-2917.3000.113	1	0.061 kg
		C = 45°	C + C	45-290C.3000.113	1	0.061 kg
		C = 45°	C + A	45-290G.3000.113	1	0.061 kg
	B - A - B	B = 45°	A	45-290Z.3000.113	2	0.061 kg
	C - A - B	C = 45°, B = 45°	A	45-2922.3000.113	3	0.061 kg
	B - A - C	B = 45°, C = 45°	A	45-2911.3000.113	4	0.061 kg
 Keylock switch actuator 3 positions, Front dimension Ø 29.45 mm						
Metal silver	C - A - C	C = 45°	A	45-2924.2000.113	1	0.080 kg
		C = 45°	C + A + C	45-290F.2000.113	1	0.080 kg
		C = 45°	C - -	45-290D.2000.113	1	0.080 kg
		C = 45°	- - C	45-2917.2000.113	1	0.080 kg
		C = 45°	C + C	45-290C.2000.113	1	0.080 kg
		C = 45°	C + A	45-290G.2000.113	1	0.080 kg
	B - A - B	B = 45°	A	45-290Z.2000.113	2	0.080 kg
	C - A - B	C = 45°, B = 45°	A	45-2922.2000.113	3	0.080 kg
		C = 45°, B = 45°	C	45-290A.2000.113	3	0.080 kg
		C = 45°, B = 45°	C + A	45-290E.2000.113	3	0.080 kg
	B - A - C	B = 45°, C = 45°	A	45-2911.2000.113	4	0.080 kg
		B = 45°, C = 45°	A + C	45-2910.2000.113	4	0.080 kg

Switching action: A = Rest, B = Momentary, C = Maintain


			
Wiring diagram 1	Wiring diagram 2	Wiring diagram 3	Wiring diagram 4

45 Raised design

ID keylock switch, IP65




Product can differ from the current configuration.

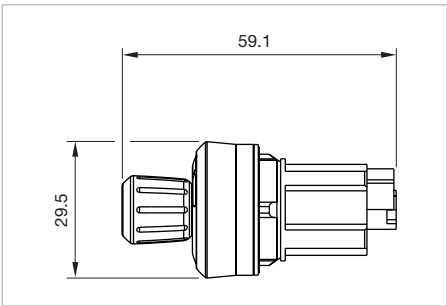

Dimensions [mm]

Additional Information


- Mounting depth incl. front plate, see chapter «drawings»

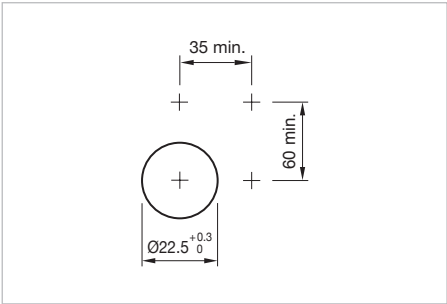



Mounting cut-outs [mm]

Equipment consisting of (schematic overview)

**ID-Key** *page 133*

**Actuator**

**Holder** *page 134*


**Electronic module** *page 143*

Each Part Number listed below includes all the black components shown in the 3D-drawing.

To obtain a complete unit, please select the red components from the pages shown.


Front ring	Switching action	Key remove	Part No.	Component layout	Wiring diagram	Weight
 ID keylock switch, Front dimension Ø 29.5 mm						
Plastic black	C-C-C-C	in all 4 positions possible	45-2S00.1001.404	5	1	0.060 kg
 ID keylock switch, Front dimension Ø 29.5 mm						
Metal sandgrey	C-C-C-C	in all 4 positions possible	45-2S00.3001.404	5	1	0.060 kg

Switching action: C = Maintained
The component layouts you will find from Page 149

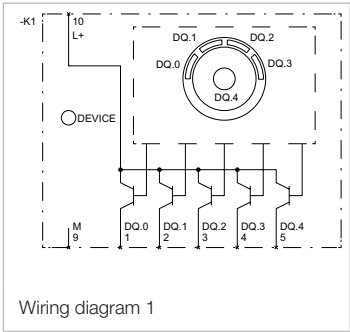


Selector switch actuator 2 positions round lever, IP66, IP67, IP69K

Equipment consisting of (schematic overview)

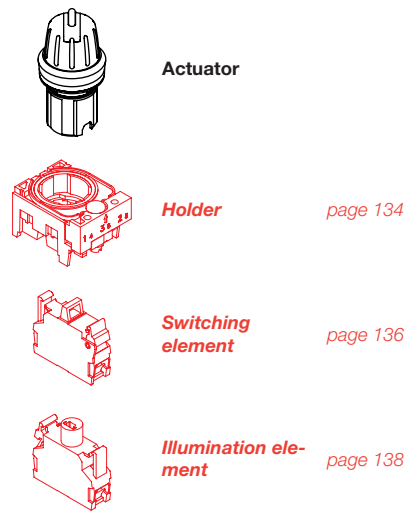


Each Part Number listed below includes all the black components shown in the 3D-drawing.

To obtain a complete unit, please select the red components from the pages shown.

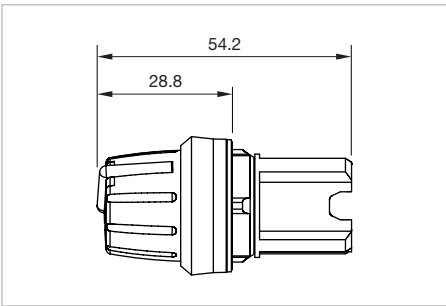

Dimensions [mm]

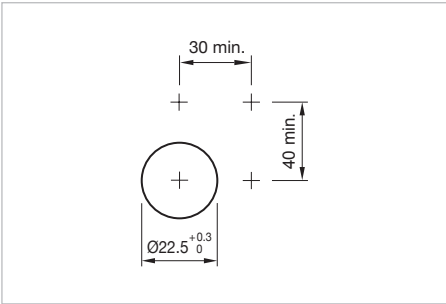

Mounting cut-outs [mm]



Product can differ from the current configuration.

Additional Information

- Mounting depth incl. front plate, see chapter «drawings»




Switching positions (A = Rest, B = Momentary, C = Maintained)

Lever	Front ring	Housing material	Switching action	Switching angle	Part No.	Wiring diagram	Weight
 Selector switch actuator 2 positions, round lever, Front dimension Ø 29.45 mm							
Plastic red	Plastic black	Plastic	A - C	C = 90°	45-2828.1E20.001	1	0.023 kg
 Selector switch actuator 2 positions, round lever, Front dimension Ø 29.45 mm							
Plastic white	Plastic black	Plastic	A - C	C = 90°	45-2828.1E90.001	1	0.023 kg
 Selector switch actuator 2 positions, round lever, Front dimension Ø 29.45 mm							
Plastic red	Metal sandgrey	Plastic	A - C	C = 90°	45-2828.3E20.001	1	0.023 kg
 Selector switch actuator 2 positions, round lever, Front dimension Ø 29.45 mm							
Plastic white	Metal sandgrey	Plastic	A - C	C = 90°	45-2828.3E90.001	1	0.023 kg


Switching action: A = Rest, C = Maintain

45 Raised design




Selector switch actuator 2 positions short lever, IP66, IP67, IP69K


Equipment consisting of (schematic overview)




Actuator



Holder *page 134*




Switching element *page 136*



Illumination element *page 138*

Each Part Number listed below includes all the black components shown in the 3D-drawing.


To obtain a complete unit, please select the red components from the pages shown.

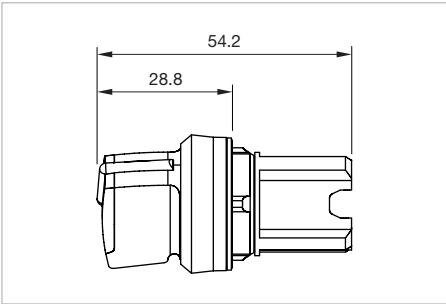

Dimensions [mm]




Product can differ from the current configuration.

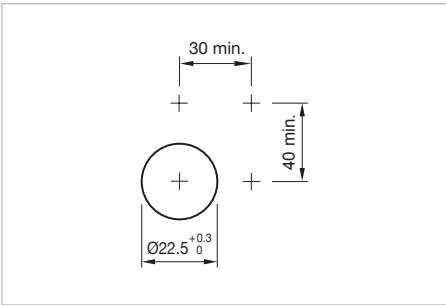

Mounting cut-outs [mm]

Additional Information

- Mounting depth incl. front plate, see chapter «drawings»
- External diameter of the short lever 32.3 mm



Switching positions (A = Rest, B = Momentary, C = Maintained)

Lever	Front ring	Housing material	Switching action	Switching angle	Part No.	Wiring diagram	Weight
	Selector switch actuator 2 positions, short lever, Front dimension Ø 29.45 mm						
Plastic red	Plastic black	Plastic	A - B	B = 45°	45-2844.1C20.006	1	0.022 kg
	Selector switch actuator 2 positions, short lever, Front dimension Ø 29.45 mm						
Plastic yellow	Plastic black	Plastic	A - B	B = 45°	45-2844.1C40.006	1	0.022 kg
	Selector switch actuator 2 positions, short lever, Front dimension Ø 29.45 mm						
Plastic green	Plastic black	Plastic	A - B	B = 45°	45-2844.1C50.006	1	0.022 kg
	Selector switch actuator 2 positions, short lever, Front dimension Ø 29.45 mm						
Plastic blue	Plastic black	Plastic	A - B	B = 45°	45-2844.1C60.006	1	0.022 kg

45 Raised design



Lever	Front ring	Housing material	Switching action	Switching angle	Part No.	Wiring diagram	Weight
 Selector switch actuator 2 positions, short lever, Front dimension Ø 29.45 mm							
Plastic white	Plastic black	Plastic	A - B	B = 45°	45-2844.1C90.006	1	0.022 kg
 Selector switch actuator 2 positions, short lever, Front dimension Ø 29.45 mm							
Plastic red	Metal sandgrey	Plastic	A - B	B = 45°	45-2844.3C20.006	1	0.029 kg
 Selector switch actuator 2 positions, short lever, Front dimension Ø 29.45 mm							
Plastic yellow	Metal sandgrey	Plastic	A - B	B = 45°	45-2844.3C40.006	1	0.029 kg
 Selector switch actuator 2 positions, short lever, Front dimension Ø 29.45 mm							
Plastic green	Metal sandgrey	Plastic	A - B	B = 45°	45-2844.3C50.006	1	0.029 kg
 Selector switch actuator 2 positions, short lever, Front dimension Ø 29.45 mm							
Plastic blue	Metal sandgrey	Plastic	A - B	B = 45°	45-2844.3C60.006	1	0.029 kg
 Selector switch actuator 2 positions, short lever, Front dimension Ø 29.45 mm							
Plastic white	Metal sandgrey	Plastic	A - B	B = 45°	45-2844.3C90.006	1	0.029 kg
 Selector switch actuator 2 positions, short lever, Front dimension Ø 29.45 mm							
Plastic red	Metal silver	Metal	A - B	B = 45°	45-2844.2C20.006	1	0.044 kg
 Selector switch actuator 2 positions, short lever, Front dimension Ø 29.45 mm							
Plastic yellow	Metal silver	Metal	A - B	B = 45°	45-2844.2C40.006	1	0.044 kg
 Selector switch actuator 2 positions, short lever, Front dimension Ø 29.45 mm							
Plastic green	Metal silver	Metal	A - B	B = 45°	45-2844.2C50.006	1	0.044 kg

Lever	Front ring	Housing material	Switching action	Switching angle	Part No.	Wiring diagram	Weight
 Selector switch actuator 2 positions, short lever, Front dimension Ø 29.45 mm							
Plastic blue	Metal silver	Metal	A - B	B = 45°	45-2844.2C60.006	1	0.044 kg
 Selector switch actuator 2 positions, short lever, Front dimension Ø 29.45 mm							
Plastic white	Metal silver	Metal	A - B	B = 45°	45-2844.2C90.006	1	0.044 kg
 Selector switch actuator 2 positions, short lever, Front dimension Ø 29.45 mm							
Plastic red	Plastic black	Plastic	A - C	C = 90°	45-2828.1C20.001	2	0.022 kg
 Selector switch actuator 2 positions, short lever, Front dimension Ø 29.45 mm							
Plastic yellow	Plastic black	Plastic	A - C	C = 90°	45-2828.1C40.001	2	0.022 kg
 Selector switch actuator 2 positions, short lever, Front dimension Ø 29.45 mm							
Plastic green	Plastic black	Plastic	A - C	C = 90°	45-2828.1C50.001	2	0.022 kg
 Selector switch actuator 2 positions, short lever, Front dimension Ø 29.45 mm							
Plastic blue	Plastic black	Plastic	A - C	C = 90°	45-2828.1C60.001	2	0.022 kg
 Selector switch actuator 2 positions, short lever, Front dimension Ø 29.45 mm							
Plastic white	Plastic black	Plastic	A - C	C = 90°	45-2828.1C90.001	2	0.022 kg
 Selector switch actuator 2 positions, short lever, Front dimension Ø 29.45 mm							
Plastic red	Metal sandgrey	Plastic	A - C	C = 90°	45-2828.3C20.001	2	0.029 kg
 Selector switch actuator 2 positions, short lever, Front dimension Ø 29.45 mm							
Plastic yellow	Metal sandgrey	Plastic	A - C	C = 90°	45-2828.3C40.001	2	0.029 kg

45 Raised design


Lever	Front ring	Housing material	Switching action	Switching angle	Part No.	Wiring diagram	Weight
 Selector switch actuator 2 positions, short lever, Front dimension Ø 29.45 mm							
Plastic green	Metal sandgrey	Plastic	A - C	C = 90°	45-2828.3C50.001	2	0.029 kg
 Selector switch actuator 2 positions, short lever, Front dimension Ø 29.45 mm							
Plastic blue	Metal sandgrey	Plastic	A - C	C = 90°	45-2828.3C60.001	2	0.029 kg
 Selector switch actuator 2 positions, short lever, Front dimension Ø 29.45 mm							
Plastic white	Metal sandgrey	Plastic	A - C	C = 90°	45-2828.3C90.001	2	0.029 kg
 Selector switch actuator 2 positions, short lever, Front dimension Ø 29.45 mm							
Plastic red	Metal silver	Metal	A - C	C = 90°	45-2828.2C20.001	2	0.044 kg
 Selector switch actuator 2 positions, short lever, Front dimension Ø 29.45 mm							
Plastic ambergris	Metal silver	Metal	A - C	C = 90°	45-2828.2C30.001	2	0.044 kg
 Selector switch actuator 2 positions, short lever, Front dimension Ø 29.45 mm							
Plastic green	Metal silver	Metal	A - C	C = 90°	45-2828.2C50.001	2	0.044 kg
 Selector switch actuator 2 positions, short lever, Front dimension Ø 29.45 mm							
Plastic white	Metal silver	Metal	A - C	C = 90°	45-2828.2C90.001	2	0.044 kg

Switching action: A = Rest, B = Momentary, C = Maintain

	
Wiring diagram 1	Wiring diagram 2


Selector switch 2 positions long lever, IP66, IP67, IP69K

Equipment consisting of (schematic overview)

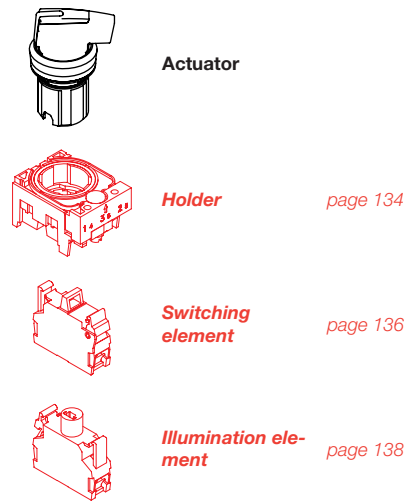

Each Part Number listed below includes all the black components shown in the 3D-drawing.


To obtain a complete unit, please select the red components from the pages shown.

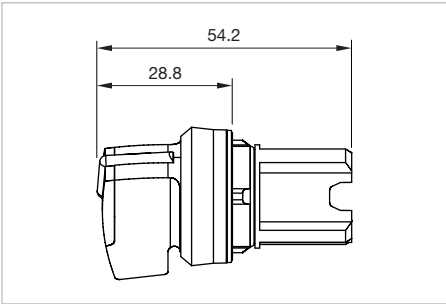

Dimensions [mm]




Product can differ from the current configuration.

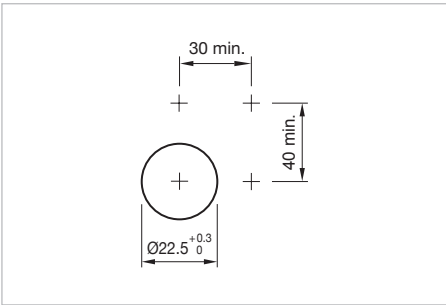

Mounting cut-outs [mm]

Additional Information

- Mounting depth incl. front plate, see chapter «drawings»
- External diameter of the long lever 44.8 mm




Switching positions (A = Rest, B = Momentary, C = Maintained)

Lever	Front ring	Housing material	Switching action	Switching angle	Part No.	Wiring diagram	Weight
	Selector switch actuator 2 positions, long lever, Front dimension Ø 29.45 mm						
Plastic red	Plastic black	Plastic	A - C	C = 90°	45-2828.1D20.001	1	0.022 kg
	Selector switch actuator 2 positions, long lever, Front dimension Ø 29.45 mm						
Plastic white	Plastic black	Plastic	A - C	C = 90°	45-2828.1D90.001	1	0.022 kg
	Selector switch actuator 2 positions, long lever, Front dimension Ø 29.45 mm						
Plastic red	Metal sandgrey	Plastic	A - C	C = 90°	45-2828.3D20.001	1	0.029 kg
	Selector switch actuator 2 positions, long lever, Front dimension Ø 29.45 mm						
Plastic white	Metal sandgrey	Plastic	A - C	C = 90°	45-2828.3D90.001	1	0.029 kg

45 Raised design


Lever	Front ring	Housing material	Switching action	Switching angle	Part No.	Wiring diagram	Weight
 Selector switch actuator 2 positions, long lever, Front dimension Ø 29.45 mm							
Plastic red	Metal silver	Metal	A - C	C = 90°	45-2828.2D20.001	1	0.022 kg
 Selector switch actuator 2 positions, long lever, Front dimension Ø 29.45 mm							
Plastic yellow	Metal silver	Metal	A - C	C = 90°	45-2828.2D40.001	1	0.052 kg
 Selector switch actuator 2 positions, long lever, Front dimension Ø 29.45 mm							
Plastic green	Metal silver	Metal	A - C	C = 90°	45-2828.2D50.001	1	0.052 kg
 Selector switch actuator 2 positions, long lever, Front dimension Ø 29.45 mm							
Plastic blue	Metal silver	Metal	A - C	C = 90°	45-2828.2D60.001	1	0.052 kg
 Selector switch actuator 2 positions, long lever, Front dimension Ø 29.45 mm							
Plastic white	Metal silver	Metal	A - C	C = 90°	45-2828.2D90.001	1	0.052 kg
 Selector switch actuator 2 positions, long lever, Front dimension Ø 29.45 mm							
Plastic yellow	Metal silver	Metal	A - B	B = 45°	45-2844.2D40.006	2	0.044 kg
 Selector switch actuator 2 positions, long lever, Front dimension Ø 29.45 mm							
Plastic green	Metal silver	Metal	A - B	B = 45°	45-2844.2D50.006	2	0.044 kg
 Selector switch actuator 2 positions, long lever, Front dimension Ø 29.45 mm							
Plastic blue	Metal silver	Metal	A - B	B = 45°	45-2844.2D60.006	2	0.044 kg
 Selector switch actuator 2 positions, long lever, Front dimension Ø 29.45 mm							
Plastic white	Metal silver	Metal	A - B	B = 45°	45-2844.2D90.006	2	0.044 kg

Switching action: A = Rest, B = Momentary, C = Maintain




45 Raised design

Selector switch 3 positions short lever, IP66, IP67, IP69K

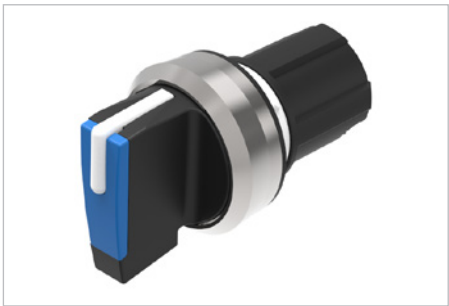



Product can differ from the current configuration.

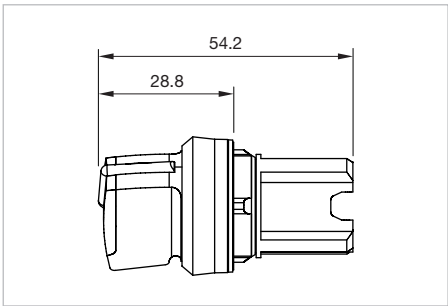


Dimensions [mm]

Equipment consisting of (schematic overview)

**Actuator**

**Holder** page 134

**Switching element** page 136


**Illumination element** page 138

Each Part Number listed below includes all the black components shown in the 3D-drawing.


To obtain a complete unit, please select the red components from the pages shown.

Additional Information

- Mounting depth incl. front plate, see chapter «drawings»
- External diameter of the short lever 32.3 mm

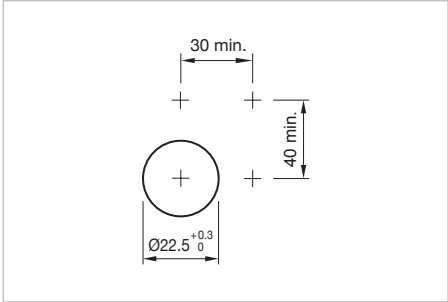

Mounting cut-outs [mm]



Switching positions (A = Rest, B = Momentary, C = Maintained)

Lever	Front ring	Housing material	Switching action	Switching angle	Part No.	Wiring diagram	Weight
	Selector switch actuator 3 positions, short lever, Front dimension Ø 29.45 mm						
Plastic red	Plastic black	Plastic	C - A - C	C = 45°	45-2819.1C20.003	1	0.022 kg
	Selector switch actuator 3 positions, short lever, Front dimension Ø 29.45 mm						
Plastic yellow	Plastic black	Plastic	C - A - C	C = 45°	45-2819.1C40.003	1	0.022 kg
	Selector switch actuator 3 positions, short lever, Front dimension Ø 29.45 mm						
Plastic green	Plastic black	Plastic	C - A - C	C = 45°	45-2819.1C50.003	1	0.022 kg
	Selector switch actuator 3 positions, short lever, Front dimension Ø 29.45 mm						
Plastic blue	Plastic black	Plastic	C - A - C	C = 45°	45-2819.1C60.003	1	0.022 kg

Lever	Front ring	Housing material	Switching action	Switching angle	Part No.	Wiring diagram	Weight
	Selector switch actuator 3 positions, short lever, Front dimension Ø 29.45 mm						
Plastic white	Plastic black	Plastic	C - A - C	C = 45°	45-2819.1C90.003	1	0.022 kg
	Selector switch actuator 3 positions, short lever, Front dimension Ø 29.45 mm						
Plastic red	Plastic black	Plastic	B - A - B	B = 45°	45-280S.1C20.003	2	0.022 kg
	Selector switch actuator 3 positions, short lever, Front dimension Ø 29.45 mm						
Plastic yellow	Plastic black	Plastic	B - A - B	B = 45°	45-280S.1C40.003	2	0.022 kg
	Selector switch actuator 3 positions, short lever, Front dimension Ø 29.45 mm						
Plastic green	Plastic black	Plastic	B - A - B	B = 45°	45-280S.1C50.003	2	0.022 kg
	Selector switch actuator 3 positions, short lever, Front dimension Ø 29.45 mm						
Plastic blue	Plastic black	Plastic	B - A - B	B = 45°	45-280S.1C60.003	2	0.022 kg
	Selector switch actuator 3 positions, short lever, Front dimension Ø 29.45 mm						
Plastic white	Plastic black	Plastic	B - A - B	B = 45°	45-280S.1C90.003	2	0.022 kg
	Selector switch actuator 3 positions, short lever, Front dimension Ø 29.45 mm						
Plastic red	Plastic black	Plastic	C - A - B	C = 45°, B = 45°	45-2816.1C20.003	3	0.022 kg
	Selector switch actuator 3 positions, short lever, Front dimension Ø 29.45 mm						
Plastic yellow	Plastic black	Plastic	C - A - B	C = 45°, B = 45°	45-2816.1C40.003	3	0.022 kg
	Selector switch actuator 3 positions, short lever, Front dimension Ø 29.45 mm						
Plastic green	Plastic black	Plastic	C - A - B	C = 45°, B = 45°	45-2816.1C50.003	3	0.022 kg
	Selector switch actuator 3 positions, short lever, Front dimension Ø 29.45 mm						
Plastic blue	Plastic black	Plastic	C - A - B	C = 45°, B = 45°	45-2816.1C60.003	3	0.022 kg

45 Raised design

Lever	Front ring	Housing material	Switching action	Switching angle	Part No.	Wiring diagram	Weight
 Selector switch actuator 3 positions, short lever, Front dimension Ø 29.45 mm							
Plastic white	Plastic black	Plastic	C - A - B	C = 45°, B = 45°	45-2816.1C90.003	3	0.022 kg
 Selector switch actuator 3 positions, short lever, Front dimension Ø 29.45 mm							
Plastic red	Plastic black	Plastic	B - A - C	B = 45°, C = 45°	45-280X.1C20.003	4	0.022 kg
 Selector switch actuator 3 positions, short lever, Front dimension Ø 29.45 mm							
Plastic yellow	Plastic black	Plastic	B - A - C	B = 45°, C = 45°	45-280X.1C40.003	4	0.022 kg
 Selector switch actuator 3 positions, short lever, Front dimension Ø 29.45 mm							
Plastic green	Plastic black	Plastic	B - A - C	B = 45°, C = 45°	45-280X.1C50.003	4	0.022 kg
 Selector switch actuator 3 positions, short lever, Front dimension Ø 29.45 mm							
Plastic blue	Plastic black	Plastic	B - A - C	B = 45°, C = 45°	45-280X.1C60.003	4	0.022 kg
 Selector switch actuator 3 positions, short lever, Front dimension Ø 29.45 mm							
Plastic white	Plastic black	Plastic	B - A - C	B = 45°, C = 45°	45-280X.1C90.003	4	0.022 kg
 Selector switch actuator 3 positions, short lever, Front dimension Ø 29.45 mm							
Plastic red	Metal sandgrey	Plastic	C - A - C	C = 45°	45-2819.3C20.003	1	0.022 kg
 Selector switch actuator 3 positions, short lever, Front dimension Ø 29.45 mm							
Plastic yellow	Metal sandgrey	Plastic	C - A - C	C = 45°	45-2819.3C40.003	1	0.022 kg
 Selector switch actuator 3 positions, short lever, Front dimension Ø 29.45 mm							
Plastic green	Metal sandgrey	Plastic	C - A - C	C = 45°	45-2819.3C50.003	1	0.022 kg
 Selector switch actuator 3 positions, short lever, Front dimension Ø 29.45 mm							
Plastic blue	Metal sandgrey	Plastic	C - A - C	C = 45°	45-2819.3C60.003	1	0.022 kg

Lever	Front ring	Housing material	Switching action	Switching angle	Part No.	Wiring diagram	Weight
	Selector switch actuator 3 positions, short lever, Front dimension Ø 29.45 mm						
Plastic white	Metal sandgrey	Plastic	C - A - C	C = 45°	45-2819.3C90.003	1	0.022 kg
	Selector switch actuator 3 positions, short lever, Front dimension Ø 29.45 mm						
Plastic red	Metal sandgrey	Plastic	B - A - B	B = 45°	45-280S.3C20.003	2	0.022 kg
	Selector switch actuator 3 positions, short lever, Front dimension Ø 29.45 mm						
Plastic yellow	Metal sandgrey	Plastic	B - A - B	B = 45°	45-280S.3C40.003	2	0.022 kg
	Selector switch actuator 3 positions, short lever, Front dimension Ø 29.45 mm						
Plastic green	Metal sandgrey	Plastic	B - A - B	B = 45°	45-280S.3C50.003	2	0.022 kg
	Selector switch actuator 3 positions, short lever, Front dimension Ø 29.45 mm						
Plastic blue	Metal sandgrey	Plastic	B - A - B	B = 45°	45-280S.3C60.003	2	0.022 kg
	Selector switch actuator 3 positions, short lever, Front dimension Ø 29.45 mm						
Plastic white	Metal sandgrey	Plastic	B - A - B	B = 45°	45-280S.3C90.003	2	0.022 kg
	Selector switch actuator 3 positions, short lever, Front dimension Ø 29.45 mm						
Plastic red	Metal sandgrey	Plastic	C - A - B	C = 45°, B = 45°	45-2816.3C20.003	3	0.022 kg
	Selector switch actuator 3 positions, short lever, Front dimension Ø 29.45 mm						
Plastic yellow	Metal sandgrey	Plastic	C - A - B	C = 45°, B = 45°	45-2816.3C40.003	3	0.022 kg
	Selector switch actuator 3 positions, short lever, Front dimension Ø 29.45 mm						
Plastic green	Metal sandgrey	Plastic	C - A - B	C = 45°, B = 45°	45-2816.3C50.003	3	0.022 kg
	Selector switch actuator 3 positions, short lever, Front dimension Ø 29.45 mm						
Plastic blue	Metal sandgrey	Plastic	C - A - B	C = 45°, B = 45°	45-2816.3C60.003	3	0.022 kg

45 Raised design

Lever	Front ring	Housing material	Switching action	Switching angle	Part No.	Wiring diagram	Weight
 Selector switch actuator 3 positions, short lever, Front dimension Ø 29.45 mm							
Plastic white	Metal sandgrey	Plastic	C - A - B	C = 45°, B = 45°	45-2816.3C90.003	3	0.022 kg
 Selector switch actuator 3 positions, short lever, Front dimension Ø 29.45 mm							
Plastic red	Metal sandgrey	Plastic	B - A - C	B = 45°, C = 45°	45-280X.3C20.003	4	0.022 kg
 Selector switch actuator 3 positions, short lever, Front dimension Ø 29.45 mm							
Plastic yellow	Metal sandgrey	Plastic	B - A - C	B = 45°, C = 45°	45-280X.3C40.003	4	0.022 kg
 Selector switch actuator 3 positions, short lever, Front dimension Ø 29.45 mm							
Plastic green	Metal sandgrey	Plastic	B - A - C	B = 45°, C = 45°	45-280X.3C50.003	4	0.022 kg
 Selector switch actuator 3 positions, short lever, Front dimension Ø 29.45 mm							
Plastic blue	Metal sandgrey	Plastic	B - A - C	B = 45°, C = 45°	45-280X.3C60.003	4	0.022 kg
 Selector switch actuator 3 positions, short lever, Front dimension Ø 29.45 mm							
Plastic white	Metal sandgrey	Plastic	B - A - C	B = 45°, C = 45°	45-280X.3C90.003	4	0.022 kg
 Selector switch actuator 3 positions, short lever, Front dimension Ø 29.45 mm							
Plastic red	Metal silver	Metal	C - A - C	C = 45°	45-2819.2C20.003	1	0.022 kg
 Selector switch actuator 3 positions, short lever, Front dimension Ø 29.45 mm							
Plastic yellow	Metal silver	Metal	C - A - C	C = 45°	45-2819.2C40.003	1	0.022 kg
 Selector switch actuator 3 positions, short lever, Front dimension Ø 29.45 mm							
Plastic green	Metal silver	Metal	C - A - C	C = 45°	45-2819.2C50.003	1	0.022 kg
 Selector switch actuator 3 positions, short lever, Front dimension Ø 29.45 mm							
Plastic white	Metal silver	Metal	C - A - C	C = 45°	45-2819.2C90.003	1	0.022 kg

Lever	Front ring	Housing material	Switching action	Switching angle	Part No.	Wiring diagram	Weight
 Selector switch actuator 3 positions, short lever, Front dimension Ø 29.45 mm							
Plastic red	Metal silver	Metal	B - A - B	B = 45°	45-280S.2C20.003	2	0.022 kg
 Selector switch actuator 3 positions, short lever, Front dimension Ø 29.45 mm							
Plastic ambergris	Metal silver	Metal	B - A - B	B = 45°	45-280S.2C30.003	2	0.022 kg
 Selector switch actuator 3 positions, short lever, Front dimension Ø 29.45 mm							
Plastic yellow	Metal silver	Metal	B - A - B	B = 45°	45-280S.2C40.003	2	0.022 kg
 Selector switch actuator 3 positions, short lever, Front dimension Ø 29.45 mm							
Plastic green	Metal silver	Metal	B - A - B	B = 45°	45-280S.2C50.003	2	0.022 kg
 Selector switch actuator 3 positions, short lever, Front dimension Ø 29.45 mm							
Plastic blue	Metal silver	Metal	B - A - B	B = 45°	45-280S.2C60.003	2	0.022 kg
 Selector switch actuator 3 positions, short lever, Front dimension Ø 29.45 mm							
Plastic white	Metal silver	Metal	B - A - B	B = 45°	45-280S.2C90.003	2	0.022 kg
 Selector switch actuator 3 positions, short lever, Front dimension Ø 29.45 mm							
Plastic red	Metal silver	Metal	C - A - B	C = 45°, B = 45°	45-2816.2C20.003	3	0.022 kg
 Selector switch actuator 3 positions, short lever, Front dimension Ø 29.45 mm							
Plastic green	Metal silver	Metal	C - A - B	C = 45°, B = 45°	45-2816.2C50.003	3	0.022 kg
 Selector switch actuator 3 positions, short lever, Front dimension Ø 29.45 mm							
Plastic white	Metal silver	Metal	C - A - B	C = 45°, B = 45°	45-2816.2C90.003	3	0.022 kg
			B - A - C	B = 45°, C = 45°	45-280X.2C90.003	4	0.022 kg


Switching action: A = Rest, B = Momentary, C = Maintain

45 Raised design

			
Wiring diagram 1	Wiring diagram 2	Wiring diagram 3	Wiring diagram 4


Selector switch 3 positions long lever, IP66, IP67, IP69K

Equipment consisting of (schematic overview)

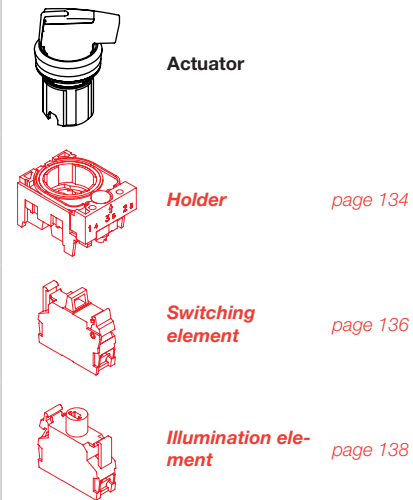

Each Part Number listed below includes all the black components shown in the 3D-drawing.


To obtain a complete unit, please select the red components from the pages shown.

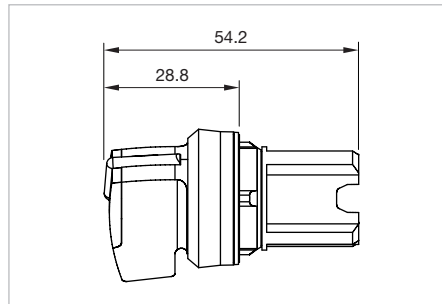

Dimensions [mm]




Product can differ from the current configuration.

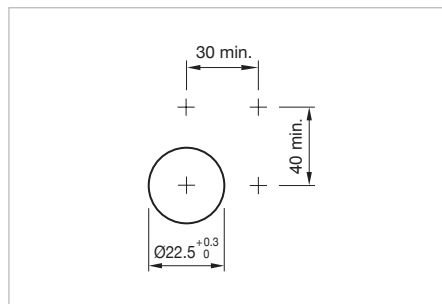

Mounting cut-outs [mm]

Additional Information

- Mounting depth incl. front plate, see chapter «drawings»
- External diameter of the long lever 44.8 mm



Switching positions (A = Rest, B = Momentary, C = Maintained)

Lever	Front ring	Housing material	Switching action	Switching angle	Part No.	Wiring diagram	Weight
 Selector switch actuator 3 positions, long lever, Front dimension Ø 29.45 mm							
Plastic red	Metal silver	Metal	C - A - C	C = 45°	45-2819.2D20.003	1	0.022 kg
 Selector switch actuator 3 positions, long lever, Front dimension Ø 29.45 mm							
Plastic green	Metal silver	Metal	C - A - C	C = 45°	45-2819.2D50.003	1	0.022 kg
 Selector switch actuator 3 positions, long lever, Front dimension Ø 29.45 mm							
Plastic white	Metal silver	Metal	C - A - C	C = 45°	45-2819.2D90.003	1	0.022 kg
 Selector switch actuator 3 positions, long lever, Front dimension Ø 29.45 mm							
Plastic red	Metal silver	Metal	B - A - B	B = 45°	45-280S.2D20.003	2	0.022 kg

45

Raised design


Lever	Front ring	Housing material	Switching action	Switching angle	Part No.	Wiring diagram	Weight
 Selector switch actuator 3 positions, long lever, Front dimension Ø 29.45 mm							
Plastic green	Metal silver	Metal	B - A - B	B = 45°	45-280S.2D50.003	2	0.022 kg
 Selector switch actuator 3 positions, long lever, Front dimension Ø 29.45 mm							
Plastic white	Metal silver	Metal	B - A - B	B = 45°	45-280S.2D90.003	2	0.022 kg
 Selector switch actuator 3 positions, long lever, Front dimension Ø 29.45 mm							
Plastic red	Metal silver	Metal	C - A - B	C = 45°, B = 45°	45-2816.2D20.003	3	0.022 kg
 Selector switch actuator 3 positions, long lever, Front dimension Ø 29.45 mm							
Plastic white	Metal silver	Metal	C - A - B	C = 45°, B = 45°	45-2816.2D90.003	3	0.022 kg
 Selector switch actuator 3 positions, long lever, Front dimension Ø 29.45 mm							
Plastic red	Metal silver	Metal	B - A - C	B = 45°, C = 45°	45-280X.2D20.003	4	0.022 kg
 Selector switch actuator 3 positions, long lever, Front dimension Ø 29.45 mm							
Plastic white	Metal silver	Metal	B - A - C	B = 45°, C = 45°	45-280X.2D90.003	4	0.022 kg

Switching action: A = Rest, B = Momentary, C = Maintain


			
Wiring diagram 1	Wiring diagram 2	Wiring diagram 3	Wiring diagram 4

Selector switch actuator 4 positions round lever, IP66, IP67, IP69K


Equipment consisting of (schematic overview)



Actuator




Holder *page 134*



Switching element *page 136*

Each Part Number listed below includes all the black components shown in the 3D-drawing.


To obtain a complete unit, please select the red components from the pages shown.

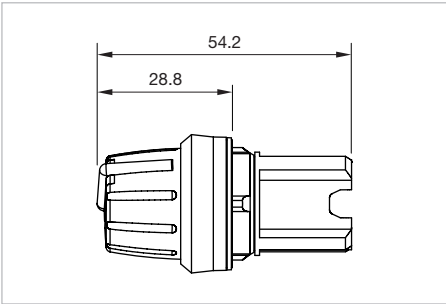

Dimensions [mm]



Product can differ from the current configuration.

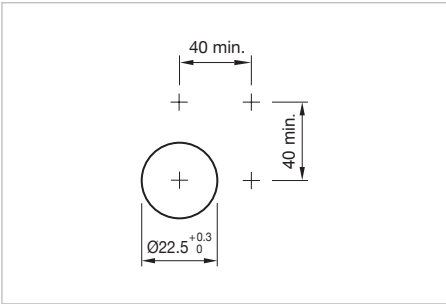

Mounting cut-outs [mm]

Additional Information

- Use only with holder for 4 elements
- Mounting depth incl. front plate, see chapter «drawings»

Lever	Front ring	Housing material	Switching action	Switching angle	Part No.	Wiring diagram	Weight
 Selector switch actuator 4 positions, round lever, Front dimension Ø 29.45 mm							
Plastic white	Plastic black	Plastic	C	C = 90°	45-2845.1E90.002	1	0.023 kg
 Selector switch actuator 4 positions, round lever, Front dimension Ø 29.45 mm							
Plastic white	Metal sandgrey	Plastic	C	C = 90°	45-2845.3E90.002	1	0.023 kg
 Selector switch actuator 4 positions, round lever, Front dimension Ø 29.45 mm							
Plastic white	Metal silver	Metal	C	C = 90°	45-2845.2E90.002	1	0.023 kg

Switching action: C = Maintain




45 Raised design

Potentiometer, IP66, IP67, IP69K




Product can differ from the current configuration.

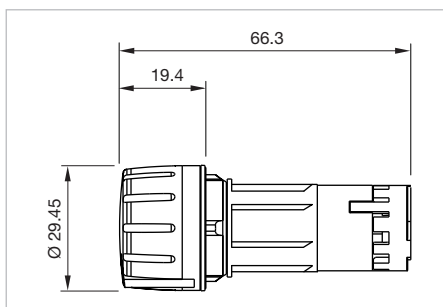


Dimensions [mm]

Equipment consisting of (schematic overview)



Actuator




Holder

page 134

Additional Information

- Power 0.5 W
- Slewing range 275° ±2°
- Mounting depth incl. front plate, see chapter «drawings»

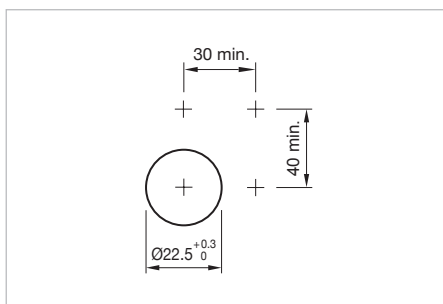


Mounting cut-outs [mm]

Each Part Number listed below includes all the black components shown in the 3D-drawing.

To obtain a complete unit, please select the red components from the pages shown.

Product attribute	Front ring	Housing material	Part No.	Component layout	Wiring diagram	Weight
 Potentiometer, Front dimension Ø 29.45 mm						
Resistor 1 kOhm / linear, series E3	Plastic black	Plastic	45-2P03.1E10.000	1	1	0.03 kg
Resistor 4.7 kOhm / linear, series E3	Plastic black	Plastic	45-2P04.1E10.000	1	1	0.03 kg
Resistor 10 kOhm / linear, series E3	Plastic black	Plastic	45-2P02.1E10.000	1	1	0.03 kg
Resistor 47 kOhm / linear, series E3	Plastic black	Plastic	45-2P06.1E10.000	1	1	0.03 kg
Resistor 100 kOhm / linear, series E3	Plastic black	Plastic	45-2P01.1E10.000	1	1	0.03 kg
Resistor 470 kOhm / linear, series E3	Plastic black	Plastic	45-2P05.1E10.000	1	1	0.03 kg
 Potentiometer, Front dimension Ø 29.45 mm						
Resistor 1 kOhm / linear, series E3	Metal silver	Metal	45-2P03.2E10.000	1	1	0.03 kg
Resistor 4.7 kOhm / linear, series E3	Metal silver	Metal	45-2P04.2E10.000	1	1	0.03 kg
Resistor 10 kOhm / linear, series E3	Metal silver	Metal	45-2P02.2E10.000	1	1	0.03 kg
Resistor 47 kOhm / linear, series E3	Metal silver	Metal	45-2P06.2E10.000	1	1	0.03 kg
Resistor 100 kOhm / linear, series E3	Metal silver	Metal	45-2P01.2E10.000	1	1	0.03 kg
Resistor 470 kOhm / linear, series E3	Metal silver	Metal	45-2P05.2E10.000	1	1	0.03 kg

The component layouts you will find from Page 149




45 Raised design

Toggle stick, IP 65, IP 67




Product can differ from the current configuration.

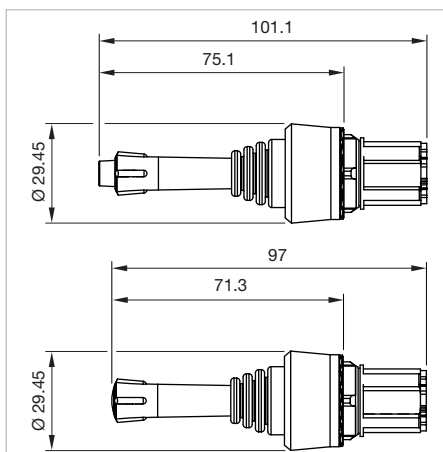

Dimensions [mm]


Additional Information

- Use only with holder for 4 elements
- Mounting depth incl. front plate, see chapter «drawings»

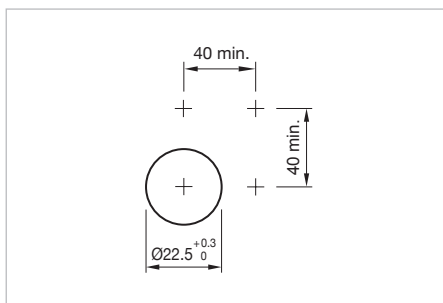


Mounting cut-outs [mm]

Equipment consisting of (schematic overview)



Actuator



Holder

page 134



Switching element

page 136



Each Part Number listed below includes all the black components shown in the 3D-drawing.


To obtain a complete unit, please select the red components from the pages shown.

Product attribute	Front ring	Housing material	Switching action	Part No.	Wiring diagram	Weight
 Toggle stick, Front dimension Ø 29.45 mm						
2 positions (L-R), lockable	Plastic black	Plastic	B	45-2F13.1010.000	1	0.035 kg
2 positions (U-D), lockable	Plastic black	Plastic	B	45-2F40.1010.000	3	0.035 kg
4-positions, lockable	Plastic black	Plastic	B	45-2F14.1010.000	5	0.035 kg
 Toggle stick, Front dimension Ø 29.45 mm						
2 positions (L-R), lockable	Metal sandgrey	Plastic	B	45-2F13.3010.000	1	0.042 kg
2 positions (U-D), lockable	Metal sandgrey	Plastic	B	45-2F40.3010.000	3	0.042 kg
4-positions, lockable	Metal sandgrey	Plastic	B	45-2F14.3010.000	5	0.042 kg
 Toggle stick, Front dimension Ø 29.45 mm						
2 positions (L-R), lockable	Metal silver	Metal	B	45-2F13.2010.000	1	0.081 kg
2 positions (U-D), lockable	Metal silver	Metal	B	45-2F40.2010.000	3	0.081 kg
4-positions, lockable	Metal silver	Metal	B	45-2F14.2010.000	5	0.081 kg


Product attribute	Front ring	Housing material	Switching action	Part No.	Wiring diagram	Weight
 Toggle stick, Front dimension Ø 29.45 mm						
2 positions (L-R)	Plastic black	Plastic	B	45-2F0T.1010.000	1	0.035 kg
2 positions (U-D)	Plastic black	Plastic	B	45-2F38.1010.000	3	0.035 kg
4 positions	Plastic black	Plastic	B	45-2F0V.1010.000	5	0.035 kg
 Toggle stick, Front dimension Ø 29.45 mm						
2 positions (L-R)	Metal sandgrey	Plastic	B	45-2F0T.3010.000	1	0.042 kg
2 positions (U-D)	Metal sandgrey	Plastic	B	45-2F38.3010.000	3	0.042 kg
4 positions	Metal sandgrey	Plastic	B	45-2F0V.3010.000	5	0.042 kg
 Toggle stick, Front dimension Ø 29.45 mm						
2 positions (L-R)	Metal silver	Metal	B	45-2F0T.2010.000	1	0.081 kg
2 positions (U-D)	Metal silver	Metal	B	45-2F38.2010.000	3	0.081 kg
4 positions	Metal silver	Metal	B	45-2F0V.2010.000	5	0.081 kg

Switching action: B = Momentary

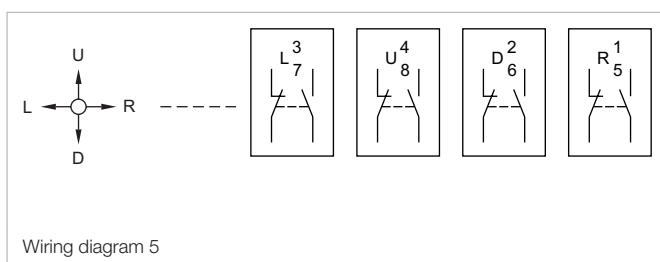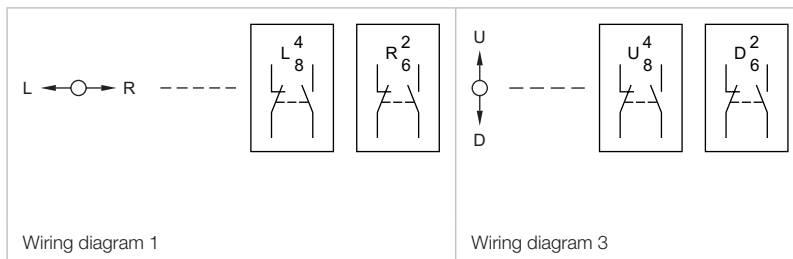

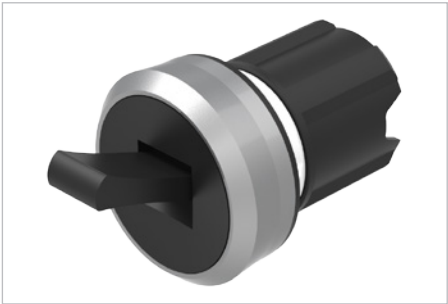

Product can differ from the current configuration.

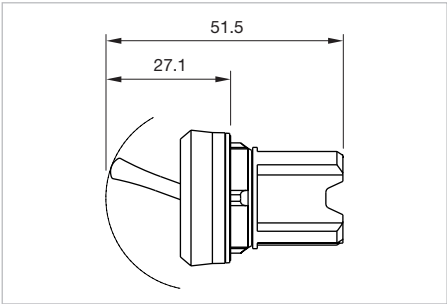


Dimensions [mm]

Equipment consisting of (schematic overview)



Actuator



Holder

page 134



Switching element


page 136

Each Part Number listed below includes all the black components shown in the 3D-drawing.

To obtain a complete unit, please select the red components from the pages shown.

Additional Information

- Mounting depth incl. front plate, see chapter «drawings»

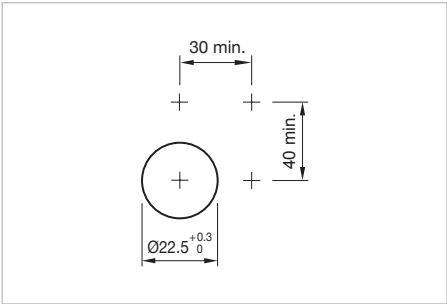

Mounting cut-outs [mm]

Product attribute	Lever	Front ring	Switching action	Part No.	Wiring diagram	Weight
 Toggle switch actuator, Front dimension Ø 29.45 mm						
reset from above	Plastic black	Plastic black	C	45-2N42.1010.000	1	0.015 kg
–	Plastic black	Plastic black	B	45-2N39.1010.000	2	0.015 kg
 Toggle switch actuator, Front dimension Ø 29.45 mm						
reset from above	Plastic black	Metal sandgrey	C	45-2N42.3010.000	1	0.020 kg
–	Plastic black	Metal sandgrey	B	45-2N39.3010.000	2	0.020 kg
 Toggle switch actuator, Front dimension Ø 29.45 mm						
reset from above	Plastic black	Metal silver	C	45-2N42.2010.000	1	0.038 kg
–	Plastic black	Metal silver	B	45-2N39.2010.000	2	0.038 kg

Switching action: B = Momentary, C = Maintain




Wiring diagram 1



Wiring diagram 2

Front

Lens plastic round flat

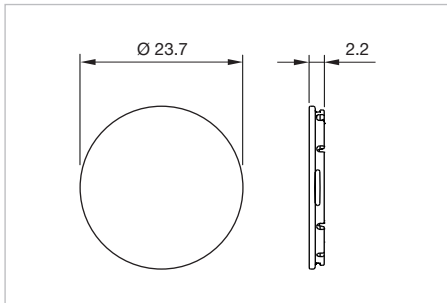


Dimensions [mm]

Dimension	Lens	Part No.	Weight
	Lens		
Ø 23.7 mm	Plastic black	45-553.0100	0.001 kg
	Lens		
Ø 23.7 mm	Plastic red	45-553.0200	0.001 kg
	Lens		
Ø 23.7 mm	Plastic yellow	45-553.0400	0.001 kg
	Lens		
Ø 23.7 mm	Plastic green	45-553.0500	0.001 kg
	Lens		
Ø 23.7 mm	Plastic blue	45-553.0600	0.001 kg
	Lens		
Ø 23.7 mm	Plastic white	45-553.0900	0.001 kg
	Lens		
Ø 23.7 mm	Plastic red transparent	45-553.0E00	0.001 kg

Dimension	Lens	Part No.	Weight
	Lens		
Ø 23.7 mm	Plastic amber transparent	45-553.0F00	0.001 kg
	Lens		
Ø 23.7 mm	Plastic yellow transparent	45-553.0G00	0.001 kg
	Lens		
Ø 23.7 mm	Plastic green transparent	45-553.0H00	0.001 kg
	Lens		
Ø 23.7 mm	Plastic blue transparent	45-553.0J00	0.001 kg
	Lens		
Ø 23.7 mm	Plastic white transparent	45-553.0K00	0.001 kg
	Lens		
Ø 23.7 mm	Plastic colourless transparent	45-553.0N00	0.001 kg

Lens plastic round encreased

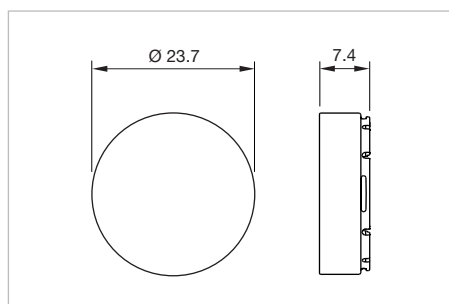

Dimensions [mm]


Dimension	Lens	Part No.	Weight
	Lens		
Ø 23.7 mm	Plastic black	45-552.0I00	0.002 kg

Dimension	Lens	Part No.	Weight
	Lens		
Ø 23.7 mm	Plastic red	45-552.0200	0.002 kg
	Lens		
Ø 23.7 mm	Plastic yellow	45-552.0400	0.002 kg
	Lens		
Ø 23.7 mm	Plastic green	45-552.0500	0.002 kg
	Lens		
Ø 23.7 mm	Plastic red transparent	45-552.0E00	0.002 kg
	Lens		
Ø 23.7 mm	Plastic yellow transparent	45-552.0G00	0.002 kg
	Lens		
Ø 23.7 mm	Plastic green transparent	45-552.0H00	0.002 kg
	Lens		
Ø 23.7 mm	Plastic blue transparent	45-552.0J00	0.002 kg
	Lens		
Ø 23.7 mm	Plastic colourless transparent	45-552.0K00	0.002 kg

Marking plate

Additional Information

- For pushbutton illuminated
- Markable, see «Marking»
- To change the text plate, the push cap is removed with a screwdriver and then snapped back

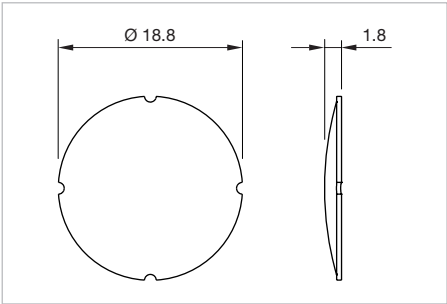


Dimensions [mm]

Marking plate illumination	Marking plate	Part No.	Weight
	Marking plate	45-563.0K00	0.001 kg
illuminative	white translucent		

Legend plate

Additional Information

- Markable, see «Marking»

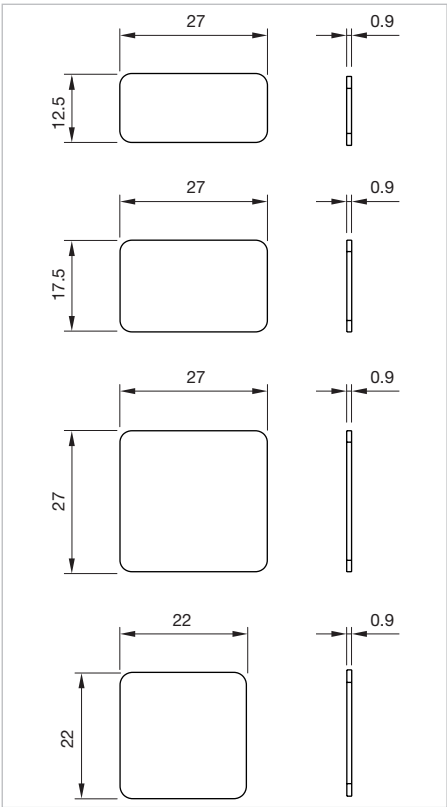

Dimensions [mm]

Product attribute	Dimension	Material	Colour	Part No.	Weight
 Legend plate					
For sticking or snapping in place	27 x 12.5 mm	Plastic	black	45-573.1102	0.001 kg
For sticking or snapping in place	27 x 12.5 mm	Plastic	red	45-573.1202	0.001 kg
For sticking or snapping in place	27 x 12.5 mm	Plastic	silver	45-573.1A02	0.001 kg
 Legend plate					
For sticking or snapping in place	27 x 17.5 mm	Plastic	black	45-573.1103	0.001 kg
For sticking or snapping in place	27 x 17.5 mm	Plastic	silver	45-573.1A03	0.001 kg
 Legend plate					
For sticking or snapping in place	27 x 27 mm	Plastic	black	45-573.1105	0.001 kg
For sticking or snapping in place	27 x 27 mm	Plastic	silver	45-573.1A05	0.001 kg
 Legend plate					
For sticking or snapping in place	22 x 22 mm	Plastic	silver	45-573.1A04	0.001 kg
For sticking	22 x 22 mm	Plastic	black	45-573.1104	0.001 kg

Emergency-stop legend

Additional Information

- Front panel thickness 3 mm max.

Product attribute	Dimension	Mounting cut-out	Marking	Colour	Part No.	Weight
 Emergency-stop legend						
–	Ø 45 x 1 mm	Ø 22.5 mm	without marking	yellow	45-50K.1407	0.005 kg
 Emergency-stop legend						
–	Ø 75 x 1 mm	Ø 22.5 mm	without marking	yellow	45-50K.1408	0.010 kg
 Emergency-stop legend						
self-adhesive	Ø 75 x 1 mm	Ø 23 mm	without marking	yellow	45-50J.1400	0.004 kg
 Emergency-stop legend						
self-adhesive	Ø 75 x 1 mm	Ø 23 mm	NOT - HALT	yellow	45-50J.140Q	0.004 kg
 Emergency-stop legend						
self-adhesive	Ø 75 x 1 mm	Ø 23 mm	EMERGENCY STOP	yellow	45-50J.140S	0.004 kg
 Emergency-stop legend						
self-adhesive	Ø 75 x 1 mm	Ø 23 mm	NOT - AUS	yellow	45-50J.140P	0.004 kg
 Emergency-stop legend						
self-adhesive	Ø 75 x 1 mm	Ø 23 mm	ARRET D'URGENCE	yellow	45-50J.140T	0.004 kg
 Emergency-stop legend						
self-adhesive	Ø 75 x 1 mm	Ø 23 mm	EMERGENZA	yellow	45-50J.140V	0.004 kg
 Emergency-stop legend						
self-adhesive	Ø 75 x 1 mm	Ø 23 mm	NODSTOP	yellow	45-50J.140W	0.004 kg


Product attribute	Dimension	Mounting cut-out	Marking	Colour	Part No.	Weight
 Emergency-stop legend						
self-adhesive	Ø 75 x 1 mm	Ø 23 mm	紧急停止	yellow	45-50J.140X	0.004 kg
 Emergency-stop legend						
self-adhesive	Ø 75 x 1 mm	Ø 23 mm	NOT-HALT EMERGENCY STOP EMERGENZA EMERGENCIA	yellow	45-50J.140Z	0.004 kg
 Emergency-stop legend						
self-adhesive	150 x 38 mm	Ø 23 mm	without marking	yellow	45-561.1400	0.004 kg
 Emergency-stop legend						
self-adhesive	150 x 38 mm	Ø 23 mm	NOT - AUS	yellow	45-561.140P	0.004 kg
 Emergency-stop legend						
self-adhesive	150 x 38 mm	Ø 23 mm	without marking	yellow	45-562.1400	0.004 kg

Legend plate for potentiometer

Dimension	Material	Colour	Part No.	Weight
 Legend plate for potentiometer				
Ø 40 mm	Plastic	black	45-538.1100	0.001 kg

Legend support without legend

- Additional Information
- For sticking or snapping in place

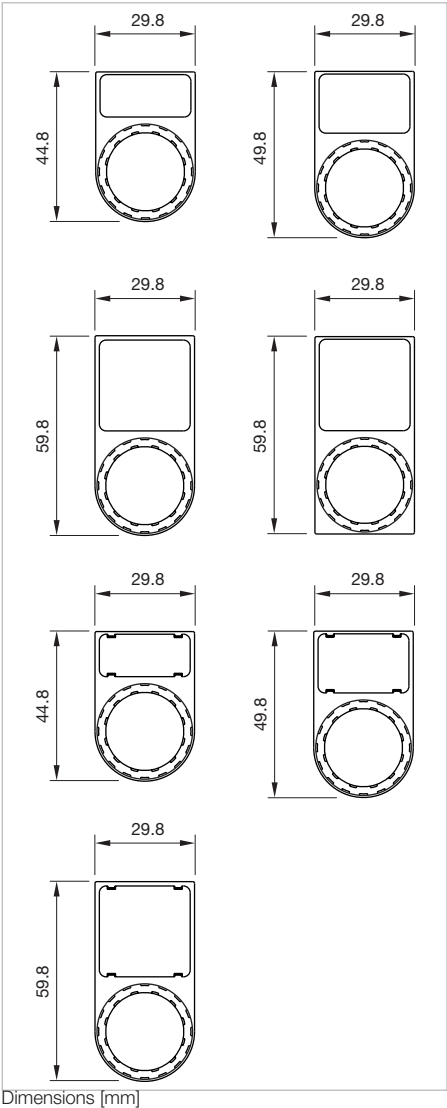


Product attribute	Material	Colour	Part No.	Weight
 Legend support without legend				
for legend plate 27 x 12.5 mm	Plastic	black	45-564.1102	0.002 kg
 Legend support without legend				
for legend plate 27 x 17.5 mm	Plastic	black	45-567.1103	0.002 kg
 Legend support without legend				
for legend plate 27 x 27 mm	Plastic	black	45-569.1105	0.002 kg

Product attribute	Material	Colour	Part No.	Weight
 Legend support without legend				
for legend plate 27 x 27 mm	Plastic	black	45-570.1105	0.002 kg
 Legend support without legend				
for legend plate 27 x 12.5 mm	Plastic	black	45-564.1110	0.002 kg
 Legend support without legend				
for legend plate 27 x 17.5 mm	Plastic	black	45-567.1111	0.002 kg
 Legend support without legend				
for legend plate 27 x 27 mm	Plastic	black	45-569.1112	0.002 kg

Legend support without legend for toggle stick

- Additional Information
- For sticking or snapping in place

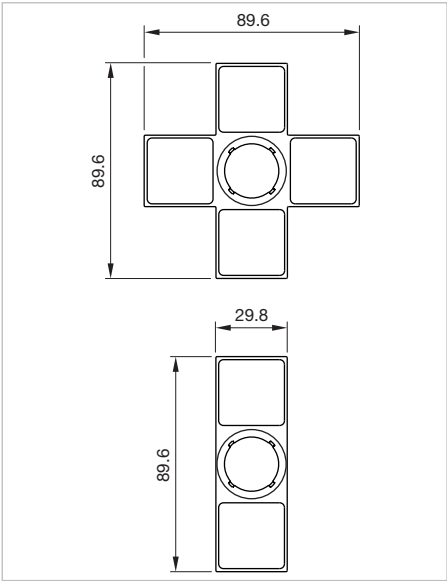


Dimensions [mm]

Product attribute	Material	Colour	Part No.	Weight
 Legend support without legend for toggle stick				
for legend plate 27 x 27 mm	Plastic	black	45-571.1105	0.002 kg
 Legend support without legend for toggle stick				
for legend plate 27 x 27 mm	Plastic	black	45-572.1105	0.002 kg

Single frame, IP66, IP67, IP69K

Additional Information

- For design square

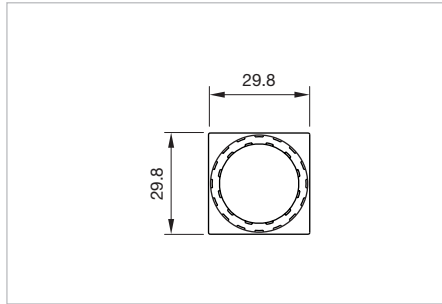


Dimensions [mm]

Dimension	Material	Colour	Part No.	Weight
 Single frame for design square				
29.8 x 29.8 mm	Plastic	black	45-558.0000	0.001 kg

Protective cover, IP66, IP67

Additional Information

- Hinged, with means for sealing
- Please note that bigger minimum distances are necessary

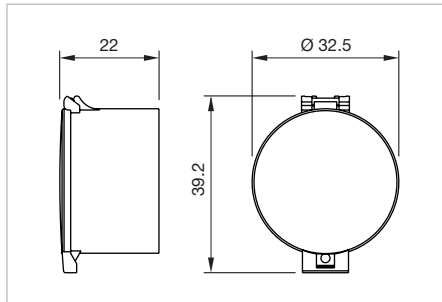


Dimensions [mm]

Material	Colour	Optics	Part No.	Weight
Protective cover				
Plastic	black	opaque	45-555.1100	0.012 kg
Protective cover				
Plastic	colourless	transparent	45-555.1K00	0.012 kg

Protective cap

Product attribute	Front protection	Material	Colour	Optics	Part No.	Weight
 Protective cap for pushbutton						
for lens raised above bezel	IP66, IP67	Silicone	colourless	transparent	45-544.1K00	0.008 kg
for lens flush	IP66, IP67	Silicone	colourless	transparent	45-545.1K00	0.008 kg
 Protective cap for twin pushbutton						
for lens raised above bezel	IP66, IP67	Silicone	colourless	transparent	45-547.1K00	0.011 kg
for lens flush	IP66, IP67	Silicone	colourless	transparent	45-548.1K00	0.011 kg
 Protective cap for Emergency stop switch						
for lens raised above bezel	IP66, IP67	Silicone	colourless	transparent	45-542.1K00	0.015 kg
 Protective cap for Mushroom-head pushbutton						
for Mushroom-head pushbutton Ø 40	IP66, IP67	Silicone	colourless	transparent	45-543.1K00	0.006 kg
 Protective cap for selector switch						
for lever switch, short lever	IP66, IP67	Silicone	colourless	transparent	45-546.1K00	0.006 kg
 Protective cap for keylock switch						
for keylock switch	IP66, IP67	Silicone	colourless	transparent	45-50F.1100	0.006 kg

Cover, IP66, IP67, IP69K

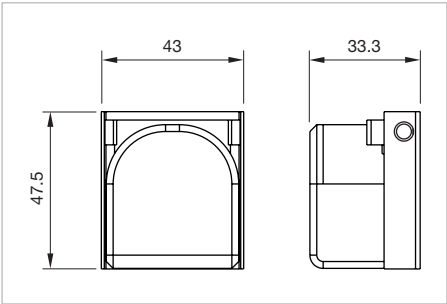


Dimensions [mm]

Product attribute	Material	Colour	Optics	Part No.	Weight
 Cover for locking device					
For pushbuttons, selector switches with round or short lever	Metall/Kunststoff	silver/colourless	transparent	45-529.2100	0.043 kg

E-stop protective shroud

Additional Information


- The protection shroud is not suitable for a proper use of emergency-stop. It can obstruct a spontaneous operation of the emergency-stop

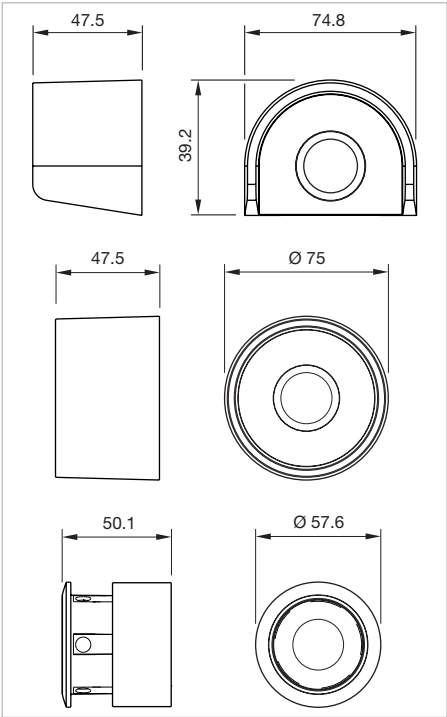

Dimensions [mm]

Product attribute	Material	Colour	Part No.	Weight
 E-stop protective shroud				
non-illuminative	Plastic	yellow	45-549.1400	0.052 kg
 E-stop protective shroud				
non-illuminative	Plastic	grey	45-549.1800	0.052 kg
 E-stop protective shroud				
non-illuminative	Plastic	yellow	45-550.1400	0.044 kg
 E-stop protective shroud				
for Emergency stop switch Ø 40 mm, for 5 padlocks	Metal	yellow	45-539.2400	0.162 kg
 E-stop protective shroud				
for Emergency stop switch Ø 40 mm, for 5 padlocks	Metal	grey	45-539.2800	0.153 kg

Protective shroud, IP66, IP67, IP69K

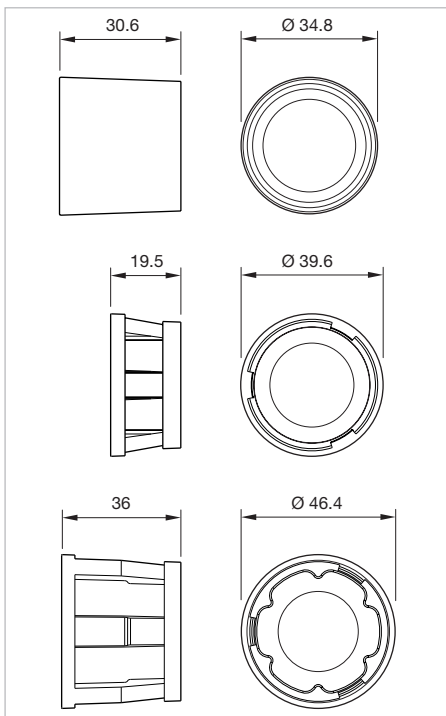

Dimensions [mm]

Product attribute	Material	Colour	Part No.	Weight
 Protective shroud				
for pushbutton, selector switch	Plastic	black	45-50N.1100	0.010 kg
 Protective shroud				
for pushbuttons	Metal	silver	45-50Q.2100	0.020 kg
 Protective shroud				
for mushroom-head pushbutton Ø 40 mm	Metal	silver	45-50P.0100	0.020 kg


Sun collar

Product attribute	Material	Colour	Part No.	Weight
 Sun collar				
for pushbutton illuminated	Plastic	black	45-560.1100	0.010 kg

Blind plug, IP66, IP67, IP69K

Additional Information

- Use with plastic or metal holder

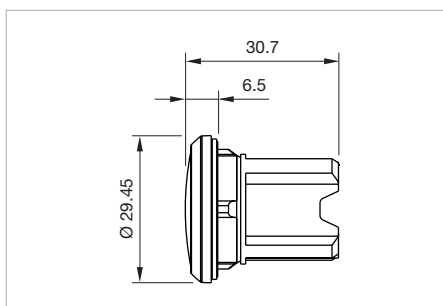

Dimensions [mm]

Mounting cut-out	Material	Colour	Part No.	Weight
 Blind plug				
Ø 22.5 mm	Plastic	black	45-506.1100	0.010 kg
 Blind plug				
Ø 22.5 mm	Metal sandgrey	silver	45-506.3A00	0.008 kg
 Blind plug				
Ø 22.5 mm	Metal shiny	silver	45-506.2A00	0.038 kg

Locking device, IP66, IP67, IP69K

Product attribute	Dimension	Material	Colour	Part No.	Weight
 Locking device					
for pushbutton with lens raised	47 x 43.1 x 25.1 mm	Metal	silver	45-531.2100	0.047 kg
 Locking device					
for pushbutton with lens flat	47 x 43.1 x 25.1 mm	Metal	silver	45-532.2100	0.047 kg
for mushroom-head pushbutton Ø 30 mm or Ø 40 mm	47 x 43.1 x 25.1 mm	Metal	silver	45-530.2100	0.047 kg
 Locking device					
for selector switch in position left	47 x 47.1 x 21.1 mm	Metal	silver	45-534.2100	0.047 kg
 Locking device					
for selector switch in position center	47 x 47.1 x 21.1 mm	Metal	silver	45-533.2100	0.047 kg
 Locking device					
for selector switch in position right	47 x 47.1 x 21.1 mm	Metal	silver	45-536.2100	0.047 kg
 Locking device					
for selector switch in position center and right	47 x 47.1 x 21.1 mm	Metal	silver	45-535.2100	0.047 kg
 Locking device					
for selector switch in position center and left	47 x 47.1 x 21.1 mm	Metal	silver	45-537.2100	0.047 kg

ID-Key

Product attribute	Colour	Part No.	Weight
 ID-Key			
Design of the RFID coding: Step 1	green	45-50T.0500	0.007 kg
 ID-Key			
Design of the RFID coding: Step 1+2	yellow	45-50V.0400	0.007 kg
 ID-Key			
Design of the RFID coding: Step 1+2+3	red	45-50W.0200	0.007 kg
 ID-Key			
Design of the RFID coding: Step 1+2+3+4	blue	45-574.0600	0.007 kg

Spare key


Additional Information

- For standard lock RONIS T254

Product attribute	Part No.	Weight
 Spare key		
2 spare keys	45-522.0900	0.007 kg

Rear side

Holder for 3 elements

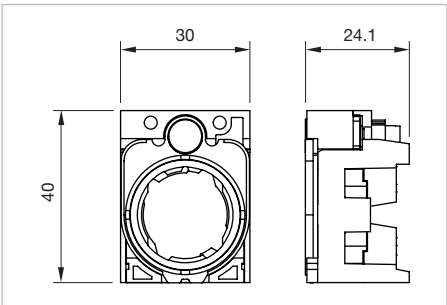


Dimensions [mm]

Product attribute	Material	Part No.	Compo- nent layout	Weight
 Holder for 3 elements				
for all buttons except selector switch 4 positions and toggle stick	Plastic	45-2300.1000.000	2	0.028 kg
 Holder for 3 elements				
for all buttons except selector switch 4 positions and toggle stick	Metal	45-2300.2000.000	2	0.046 kg

The component layouts you will find from Page 145

Holder for 4 elements

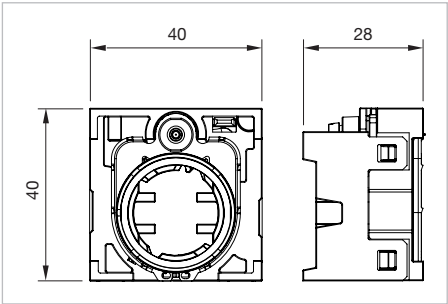


Dimensions [mm]

Product attribute	Material	Part No.	Component layout	Weight
 Holder for 4 elements for selector switch 4 positions and toggle stick	Plastic	45-2400.1000.000	3	0.028 kg
	Metal	45-2400.2000.000	3	0.046 kg
 Holder for 4 elements for selector switch 4 positions and toggle stick				


The component layouts you will find from Page 145

Switching element front mounting

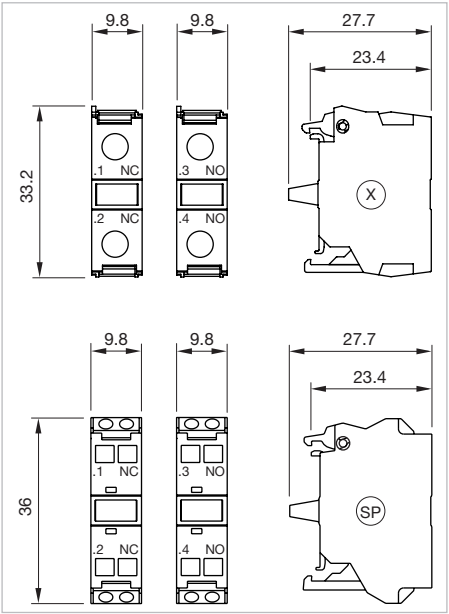


Dimensions [mm]
X = Screw terminal,
SP = Spring-type terminal

Switching current	Contacts	Contact material	Terminal	Part No.	Wiring diagram	Weight
 Switching element						
10 A	1 NO	Silver	Screw	45-311.1Z10	1	0.010 kg
10 A	1 NC	Silver	Screw	45-312.1Z10	2	0.010 kg
 Switching element						
10 A	1 NO	Silver	Spring-type terminal	45-311.1Z40	1	0.010 kg
10 A	1 NC	Silver	Spring-type terminal	45-312.1Z40	2	0.010 kg





Switching element base mounting

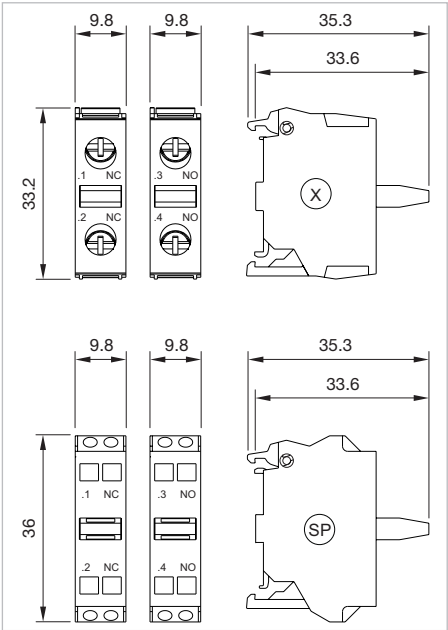

Dimensions [mm]
X = Screw terminal,
SP = Spring-type terminal

Switching current	Contacts	Contact material	Terminal	Part No.	Wiring diagram	Weight
 Switching element						
10 A	1 NO	Silver	Screw	45-311.2Z10	1	0.010 kg
 Switching element						
10 A	1 NC	Silver	Screw	45-312.2Z10	2	0.010 kg
 Switching element						
10 A	1 NO	Silver	Spring-type terminal	45-311.2Z40	1	0.010 kg
 Switching element						
10 A	1 NC	Silver	Spring-type terminal	45-312.2Z40	2	0.010 kg



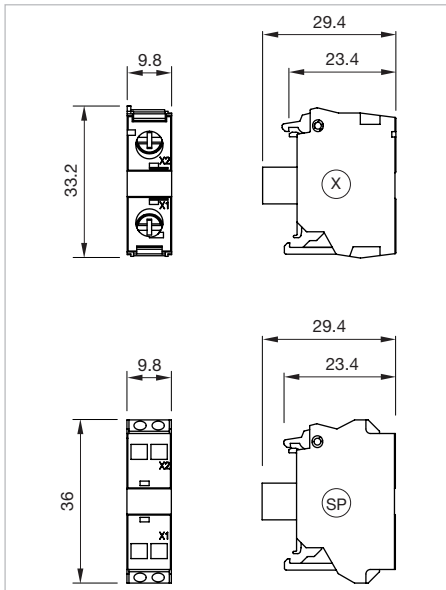

Dimensions [mm]
 X = Screw terminal,
 SP = Spring-type terminal


LED colour	Operating voltage	Lumi. intensity	Terminal	Part No.	Wiring diagram	Weight
 Illumination element						
red	6-24 VAC/DC	450...1120 mcd	Screw	45-320.1E11	1	0.009 kg
amber	6-24 VAC/DC	450...1120 mcd	Screw	45-320.1F11	1	0.009 kg
yellow	6-24 VAC/DC	900...1400 mcd	Screw	45-320.1G11	1	0.009 kg
green	6-24 VAC/DC	900...1400 mcd	Screw	45-320.1H11	1	0.009 kg
blue	6-24 VAC/DC	280...710 mcd	Screw	45-320.1J11	1	0.009 kg
white	6-24 VAC/DC	900...1400 mcd	Screw	45-320.1N11	1	0.009 kg
red	24-240 VAC/DC	450...1120 mcd	Screw	45-320.1E12	1	0.010 kg
amber	24-240 VAC/DC	450...1120 mcd	Screw	45-320.1F12	1	0.010 kg
yellow	24-240 VAC/DC	900...1400 mcd	Screw	45-320.1G12	1	0.010 kg
green	24-240 VAC/DC	900...1400 mcd	Screw	45-320.1H12	1	0.010 kg
blue	24-240 VAC/DC	280...710 mcd	Screw	45-320.1J12	1	0.010 kg
white	24-240 VAC/DC	900...1400 mcd	Screw	45-320.1N12	1	0.010 kg
red	24 VAC/DC	450...1120 mcd	Screw	45-320.1E16	1	0.009 kg
amber	24 VAC/DC	450...1120 mcd	Screw	45-320.1F16	1	0.009 kg
yellow	24 VAC/DC	900...1400 mcd	Screw	45-320.1G16	1	0.009 kg
green	24 VAC/DC	900...1400 mcd	Screw	45-320.1H16	1	0.009 kg
blue	24 VAC/DC	280...710 mcd	Screw	45-320.1J16	1	0.009 kg
white	24 VAC/DC	900...1400 mcd	Screw	45-320.1N16	1	0.009 kg
red	110 VAC	450...1120 mcd	Screw	45-320.1E17	1	0.010 kg
amber	110 VAC	450...1120 mcd	Screw	45-320.1F17	1	0.010 kg
yellow	110 VAC	900...1400 mcd	Screw	45-320.1G17	1	0.010 kg
green	110 VAC	900...1400 mcd	Screw	45-320.1H17	1	0.010 kg
blue	110 VAC	280...710 mcd	Screw	45-320.1J17	1	0.010 kg
white	110 VAC	900...1400 mcd	Screw	45-320.1N17	1	0.010 kg

LED colour	Operating voltage	Lumi. intensity	Terminal	Part No.	Wiring diagram	Weight
red	230 VAC	450...1120 mcd	Screw	45-320.1E18	1	0.010 kg
amber	230 VAC	450...1120 mcd	Screw	45-320.1F18	1	0.010 kg
yellow	230 VAC	900...1400 mcd	Screw	45-320.1G18	1	0.010 kg
green	230 VAC	900...1400 mcd	Screw	45-320.1H18	1	0.010 kg
blue	230 VAC	280...710 mcd	Screw	45-320.1J18	1	0.010 kg
white	230 VAC	900...1400 mcd	Screw	45-320.1N18	1	0.010 kg




Illumination element

red	6-24 VAC/DC	450...1120 mcd	Spring-type terminal	45-320.1E41	1	0.009 kg
amber	6-24 VAC/DC	450...1120 mcd	Spring-type terminal	45-320.1F41	1	0.009 kg
yellow	6-24 VAC/DC	900...1400 mcd	Spring-type terminal	45-320.1G41	1	0.009 kg
green	6-24 VAC/DC	900...1400 mcd	Spring-type terminal	45-320.1H41	1	0.009 kg
blue	6-24 VAC/DC	280...710 mcd	Spring-type terminal	45-320.1J41	1	0.009 kg
white	6-24 VAC/DC	900...1400 mcd	Spring-type terminal	45-320.1N41	1	0.009 kg
red	24-240 VAC/DC	450...1120 mcd	Spring-type terminal	45-320.1E42	1	0.010 kg
amber	24-240 VAC/DC	450...1120 mcd	Spring-type terminal	45-320.1F42	1	0.010 kg
yellow	24-240 VAC/DC	900...1400 mcd	Spring-type terminal	45-320.1G42	1	0.010 kg
green	24-240 VAC/DC	900...1400 mcd	Spring-type terminal	45-320.1H42	1	0.010 kg
blue	24-240 VAC/DC	280...710 mcd	Spring-type terminal	45-320.1J42	1	0.010 kg
white	24-240 VAC/DC	900...1400 mcd	Spring-type terminal	45-320.1N42	1	0.010 kg
red	24 VAC/DC	450...1120 mcd	Spring-type terminal	45-320.1E46	1	0.009 kg
amber	24 VAC/DC	450...1120 mcd	Spring-type terminal	45-320.1F46	1	0.009 kg
yellow	24 VAC/DC	900...1400 mcd	Spring-type terminal	45-320.1G46	1	0.009 kg
green	24 VAC/DC	900...1400 mcd	Spring-type terminal	45-320.1H46	1	0.009 kg
blue	24 VAC/DC	280...710 mcd	Spring-type terminal	45-320.1J46	1	0.009 kg
white	24 VAC/DC	900...1400 mcd	Spring-type terminal	45-320.1N46	1	0.009 kg
red	110 VAC	450...1120 mcd	Spring-type terminal	45-320.1E47	1	0.010 kg
amber	110 VAC	450...1120 mcd	Spring-type terminal	45-320.1F47	1	0.010 kg
yellow	110 VAC	900...1400 mcd	Spring-type terminal	45-320.1G47	1	0.010 kg
green	110 VAC	900...1400 mcd	Spring-type terminal	45-320.1H47	1	0.010 kg
blue	110 VAC	280...710 mcd	Spring-type terminal	45-320.1J47	1	0.010 kg
white	110 VAC	900...1400 mcd	Spring-type terminal	45-320.1N47	1	0.010 kg
red	230 VAC	450...1120 mcd	Spring-type terminal	45-320.1E48	1	0.010 kg
amber	230 VAC	450...1120 mcd	Spring-type terminal	45-320.1F48	1	0.010 kg
yellow	230 VAC	900...1400 mcd	Spring-type terminal	45-320.1G48	1	0.010 kg
green	230 VAC	900...1400 mcd	Spring-type terminal	45-320.1H48	1	0.010 kg
blue	230 VAC	280...710 mcd	Spring-type terminal	45-320.1J48	1	0.010 kg
white	230 VAC	900...1400 mcd	Spring-type terminal	45-320.1N48	1	0.010 kg



Wiring diagram 1

Illumination element base mounting

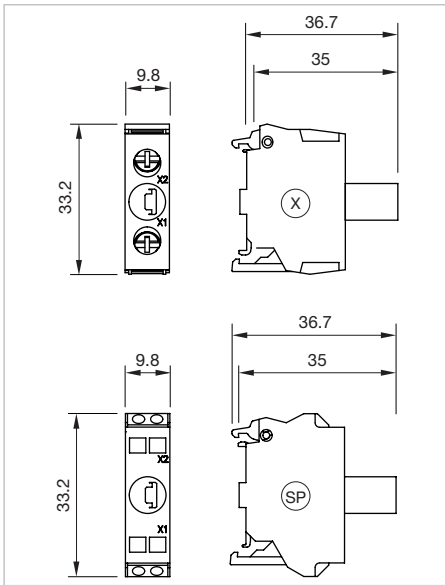

Dimensions [mm]
 X = Screw terminal,
 SP = Spring-type terminal


LED colour	Operating voltage	Lumi. intensity	Terminal	Part No.	Wiring diagram	Weight
 Illumination element						
red	6-24 VAC/DC	450...1120 mcd	Screw	45-320.2E11	1	0.009 kg
amber	6-24 VAC/DC	450...1120 mcd	Screw	45-320.2F11	1	0.009 kg
yellow	6-24 VAC/DC	900...1400 mcd	Screw	45-320.2G11	1	0.009 kg
green	6-24 VAC/DC	900...1400 mcd	Screw	45-320.2H11	1	0.009 kg
blue	6-24 VAC/DC	280...710 mcd	Screw	45-320.2J11	1	0.009 kg
white	6-24 VAC/DC	900...1400 mcd	Screw	45-320.2N11	1	0.009 kg
red	24-240 VAC/DC	900...1400 mcd	Screw	45-320.2E12	1	0.009 kg
amber	24-240 VAC/DC	450...1120 mcd	Screw	45-320.2F12	1	0.009 kg
yellow	24-240 VAC/DC	900...1400 mcd	Screw	45-320.2G12	1	0.009 kg
green	24-240 VAC/DC	900...1400 mcd	Screw	45-320.2H12	1	0.009 kg
blue	24-240 VAC/DC	280...710 mcd	Screw	45-320.2J12	1	0.009 kg
white	24-240 VAC/DC	900...1400 mcd	Screw	45-320.2N12	1	0.009 kg
red	24 VAC/DC	450...1120 mcd	Screw	45-320.2E16	1	0.009 kg
amber	24 VAC/DC	450...1120 mcd	Screw	45-320.2F16	1	0.009 kg
yellow	24 VAC/DC	900...1400 mcd	Screw	45-320.2G16	1	0.009 kg
green	24 VAC/DC	900...1400 mcd	Screw	45-320.2H16	1	0.009 kg
blue	24 VAC/DC	280...710 mcd	Screw	45-320.2J16	1	0.009 kg
white	24 VAC/DC	900...1400 mcd	Screw	45-320.2N16	1	0.009 kg
red	110 VAC	450...1120 mcd	Screw	45-320.2E17	1	0.009 kg
amber	110 VAC	450...1120 mcd	Screw	45-320.2F17	1	0.009 kg
yellow	110 VAC	900...1400 mcd	Screw	45-320.2G17	1	0.009 kg
green	110 VAC	900...1400 mcd	Screw	45-320.2H17	1	0.009 kg
blue	110 VAC	280...710 mcd	Screw	45-320.2J17	1	0.009 kg
white	110 VAC	900...1400 mcd	Screw	45-320.2N17	1	0.009 kg

LED colour	Operating voltage	Lichtstärke	Terminal	Part No.	Wiring diagram	Weight
red	230 VAC	450...1120 mcd	Screw	45-320.2E18	1	0.009 kg
amber	230 VAC	450...1120 mcd	Screw	45-320.2F18	1	0.009 kg
yellow	230 VAC	900...1400 mcd	Screw	45-320.2G18	1	0.009 kg
green	230 VAC	900...1400 mcd	Screw	45-320.2H18	1	0.009 kg
blue	230 VAC	280...710 mcd	Screw	45-320.2J18	1	0.009 kg
white	230 VAC	900...1400 mcd	Screw	45-320.2N18	1	0.009 kg




Illumination element

red	6-24 VAC/DC	450...1120 mcd	Spring-type terminal	45-320.2E41	1	0.009 kg
amber	6-24 VAC/DC	450...1120 mcd	Spring-type terminal	45-320.2F41	1	0.009 kg
yellow	6-24 VAC/DC	900...1400 mcd	Spring-type terminal	45-320.2G41	1	0.009 kg
green	6-24 VAC/DC	900...1400 mcd	Spring-type terminal	45-320.2H41	1	0.009 kg
blue	6-24 VAC/DC	280...710 mcd	Spring-type terminal	45-320.2J41	1	0.009 kg
white	6-24 VAC/DC	900...1400 mcd	Spring-type terminal	45-320.2N41	1	0.009 kg
red	24-240 VAC/DC	450...1120 mcd	Spring-type terminal	45-320.2E42	1	0.009 kg
amber	24-240 VAC/DC	450...1120 mcd	Spring-type terminal	45-320.2F42	1	0.009 kg
yellow	24-240 VAC/DC	900...1400 mcd	Spring-type terminal	45-320.2G42	1	0.009 kg
green	24-240 VAC/DC	900...1400 mcd	Spring-type terminal	45-320.2H42	1	0.009 kg
blue	24-240 VAC/DC	280...710 mcd	Spring-type terminal	45-320.2J42	1	0.009 kg
white	24-240 VAC/DC	900...1400 mcd	Spring-type terminal	45-320.2N42	1	0.009 kg
red	24 VAC/DC	450...1120 mcd	Spring-type terminal	45-320.2E46	1	0.009 kg
amber	24 VAC/DC	450...1120 mcd	Spring-type terminal	45-320.2F46	1	0.009 kg
yellow	24 VAC/DC	900...1400 mcd	Spring-type terminal	45-320.2G46	1	0.009 kg
green	24 VAC/DC	900...1400 mcd	Spring-type terminal	45-320.2H46	1	0.009 kg
blue	24 VAC/DC	280...710 mcd	Spring-type terminal	45-320.2J46	1	0.009 kg
white	24 VAC/DC	900...1400 mcd	Spring-type terminal	45-320.2N46	1	0.009 kg
red	110 VAC	450...1120 mcd	Spring-type terminal	45-320.2E47	1	0.009 kg
amber	110 VAC	450...1120 mcd	Spring-type terminal	45-320.2F47	1	0.009 kg
yellow	110 VAC	900...1400 mcd	Spring-type terminal	45-320.2G47	1	0.009 kg
green	110 VAC	900...1400 mcd	Spring-type terminal	45-320.2H47	1	0.009 kg
blue	110 VAC	280...710 mcd	Spring-type terminal	45-320.2J47	1	0.009 kg
white	110 VAC	900...1400 mcd	Spring-type terminal	45-320.2N47	1	0.009 kg
red	230 VAC	450...1120 mcd	Spring-type terminal	45-320.2E48	1	0.009 kg
amber	230 VAC	450...1120 mcd	Spring-type terminal	45-320.2F48	1	0.009 kg
yellow	230 VAC	900...1400 mcd	Spring-type terminal	45-320.2G48	1	0.009 kg
green	230 VAC	900...1400 mcd	Spring-type terminal	45-320.2H48	1	0.009 kg
blue	230 VAC	280...710 mcd	Spring-type terminal	45-320.2J48	1	0.009 kg
white	230 VAC	900...1400 mcd	Spring-type terminal	45-320.2N48	1	0.009 kg




Wiring diagram 1

Illumination element PCB mounting

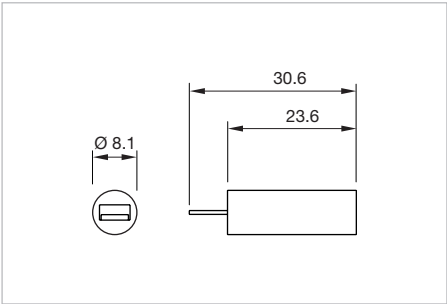


Dimensions [mm]
X = Screw terminal,
SP = Spring-type terminal

LED colour	Operating voltage	Terminal	Part No.	Wiring diagram	Weight
 Illumination element					
red	5 VDC	PCB terminal	45-320.3E60	1	0.009 kg
amber	5 VDC	PCB terminal	45-320.3F60	1	0.009 kg
yellow	5 VDC	PCB terminal	45-320.3G60	1	0.009 kg
green	5 VDC	PCB terminal	45-320.3H60	1	0.009 kg
blue	5 VDC	PCB terminal	45-320.3J60	1	0.009 kg
white	5 VDC	PCB terminal	45-320.3N60	1	0.009 kg




Electronic module

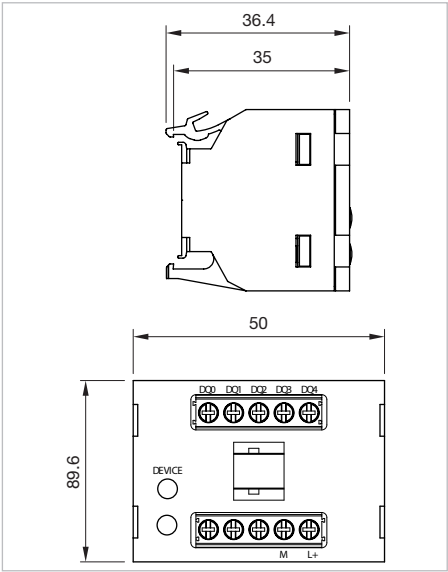

Dimensions [mm]


Product attribute	Operating voltage	Terminal	Part No.	Component layout	Wiring diagram	Weight
 Electronic module						
Front plate mounting	24 VDC	Screw	45-36F.1114	5	1	0.036 kg

The component layouts you will find from page 149




Wiring diagram 1

Test module

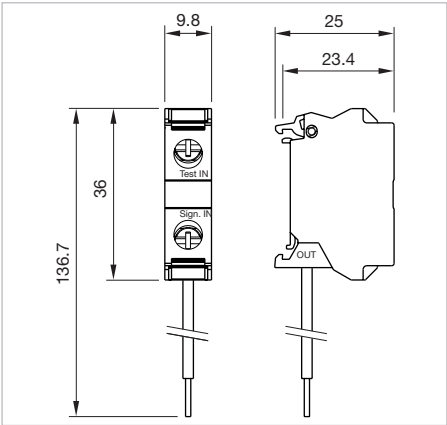

Dimensions [mm]
X = Screw terminal,
SP = Spring-type terminal

Product attribute	Operating voltage	Terminal	Part No.	Wiring diagram	Weight
 Test module front mounting					
front plate mounting	12-240 VAC/DC	Screw	45-330.1115	1	0.011 kg
 Test module base mounting					
base mounting	12-240 VAC/DC	Screw	45-330.2115	1	0.011 kg




Extension plungers

Product attribute	Material	Colour	Part No.	Weight
 Extension plungers				
for pushbutton with extended stroke	Plastic	black	45-50M.1900	0.009 kg

Legend plate for switching elements

- Additional Information
- Without inscription
 - In support of the dust resistance

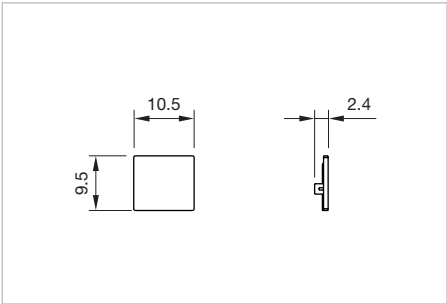

Dimensions [mm]


Product attribute	Dimension	Material	Colour	Part No.	Weight
 Legend plate					
for snapping in place	10.5 x 9.5 mm	Plastic	white	45-523.1900	0.001 kg

Mounting




Enclosure, IP66, IP67, IP69K

Additional Information

- Openings for cable gland M16 or M20

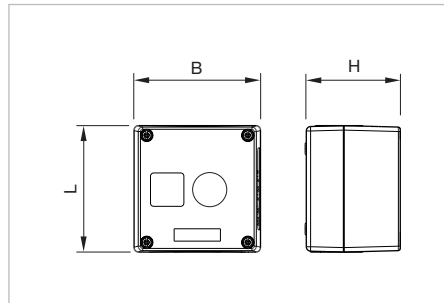

Dimensions [mm]

Product attribute	Dimension	Material	Colour	Part No.	Weight
 Enclosure					
1 mounting hole Ø 22.3 mm	L 85 x B 85 x H 64 mm	Plastic	grey	45-430.1801	0.251 kg
 Enclosure					
1 mounting hole Ø 22.3 mm	L 85 x B 85 x H 64 mm	Plastic	yellow	45-410.1401	0.248 kg
 Enclosure					
1 mounting hole Ø 22.3 mm, for base mounting, top and bottom 1 x M20	L 89.4 x B 85 x H 64 mm	Metal	yellow	45-410.2403	0.478 kg
 Enclosure					
1 mounting hole Ø 22.3 mm, for base mounting, top and bottom 1 x M20	L 89.4 x B 85 x H 64 mm	Metal	grey	45-430.2803	0.479 kg
 Enclosure					
1 mounting hole Ø 22.3 mm, with protective shroud	L 85 x B 85 x H 64 mm	Plastic	yellow	45-420.1401	0.287 kg
 Enclosure					
1 mounting hole Ø 22.3 mm, with protective shroud	L 85 x B 85 x H 64 mm	Metal	yellow	45-420.2403	0.568 kg
 Enclosure					
1 mounting hole Ø 22.3 mm, with protective shroud, for base mounting, top and bottom 1 x M20	L 89.4 x B 85 x H 64 mm	Metal	grey	45-420.2803	0.568 kg

Product attribute	Dimension	Material	Colour	Part No.	Weight
 Enclosure					
2 mounting holes Ø 22.3 mm	L 114 x B 85 x H 64 mm	Plastic	grey	45-440.1801	0.299 kg
2 mounting holes Ø 22.3 mm, for base mounting, top and bottom 1 x M20	L 118 x B 85 x H 64 mm	Metal	grey	45-440.2803	0.299 kg
 Enclosure					
3 mounting holes Ø 22.3 mm	L 154 x B 85 x H 64 mm	Plastic	grey	45-450.1801	0.364 kg
3 mounting holes Ø 22.3 mm, for base mounting, top and bottom 1 x M20	L 158 x B 85 x H 64 mm	Metal	grey	45-450.2803	0.683 kg
 Enclosure					
4 mounting holes Ø 22.3 mm	L 194 x B 85 x H 64 mm	Plastic	grey	45-460.1802	0.436 kg
4 mounting holes Ø 22.3 mm, for base mounting, top and bottom 1 x M20	L 199 x B 85 x H 64 mm	Metal	grey	45-460.2804	0.799 kg
 Enclosure					
6 mounting holes Ø 22.3 mm	L 280 x B 85 x H 64 mm	Plastic	grey	45-470.1802	0.602 kg
6 mounting holes Ø 22.3 mm, for base mounting, top and bottom 1 x M20	L 285 x B 85 x H 64 mm	Metal	grey	45-470.2804	1.081 kg

Cable gland, IP66, IP67, IP69K

Thread	Material	Colour	Part No.	Weight
 Cable gland				
M20	Plastic	black	45-507.1100	0.016 kg
M25	Plastic	black	45-509.1100	0.022 kg


Connection piece, IP 68

Product attribute	Thread	Material	Colour	Part No.	Weight
 Connection piece					
for connecting 2 enclosures, with hexagonal nut	M20/M20	Plastic	black	45-50C.1900	0.050 kg
 Connection piece					
for connecting 2 enclosures, with hexagonal nut	M20/M25	Plastic	black	45-50D.1900	0.055 kg
 Connection piece					
for connecting 2 enclosures, with hexagonal nut	M25/M25	Plastic	black	45-50E.1900	0.060 kg
 Connection piece					
for connecting 2 enclosures, with hexagonal nut	M20/M20	Metal	silver	45-50C.2900	0.055 kg
 Connection piece					
for connecting 2 enclosures, with hexagonal nut	M20/M25	Metal	silver	45-50D.2900	0.075 kg
 Connection piece					
for connecting 2 enclosures, with hexagonal nut	M25/M25	Metal	silver	45-50E.2900	0.077 kg


Enclosure cover monitoring

Product attribute	Material	Colour	Part No.	Weight
 Enclosure cover monitoring				
with extension plungers	Plastic	black	45-50G.0900	0.007 kg


Drawings



Component layout 1



Component layout 2



Component layout 3


Arrangement switching element
corresponds to
designation of front adaptor

1	3	2
---	---	---

Switching action
green (white) button pressed
red (black) button pressed

Switching element



Component layout 4

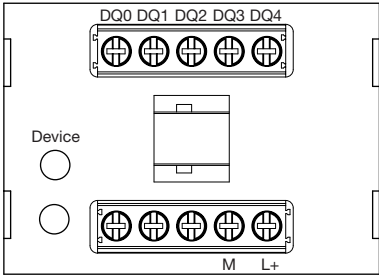



Component layout 5

Dimensions incl. mounting depth of 3 or 4 elements



Indicator, Pushbutton, Illuminated pushbutton
(flush design)

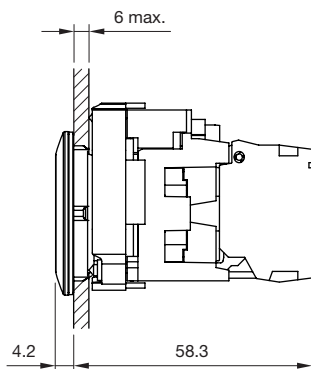



Keylock switch (flush design)

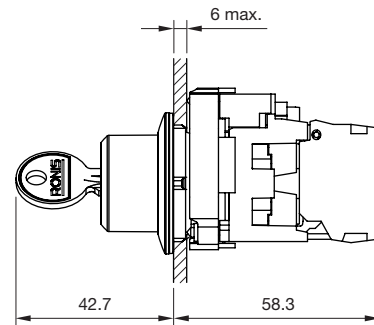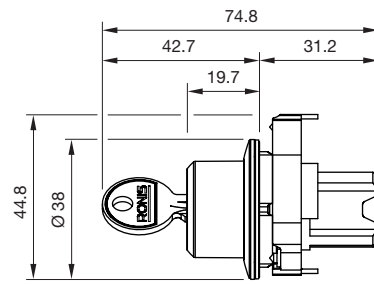


Selector switch short lever (flush design)




Selector switch long lever (flush design)




Indicator full face illumination (raised design)

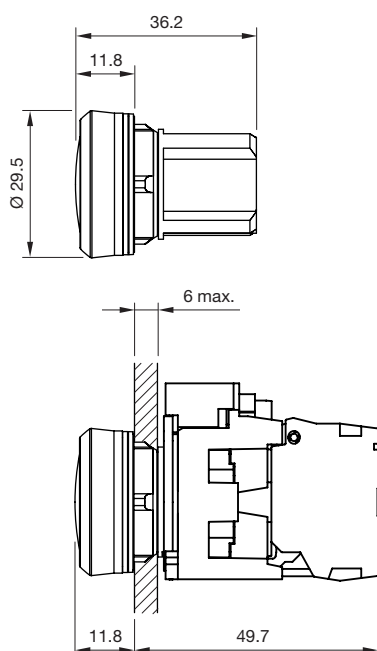


Indicator front illumination, Pushbutton, Illuminated pushbutton, Lens level with front ring (raised design)

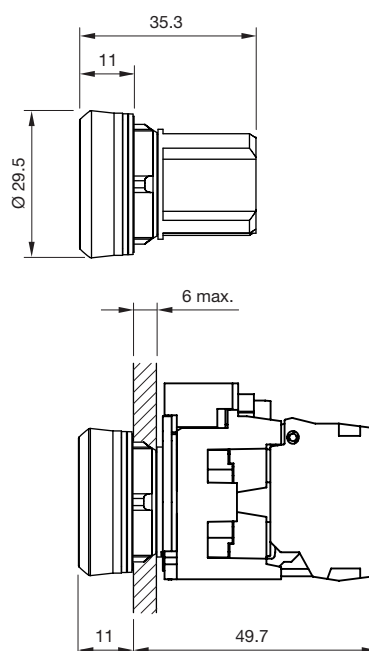


Pushbutton, Illuminated pushbutton, lens raised above front ring (raised design)

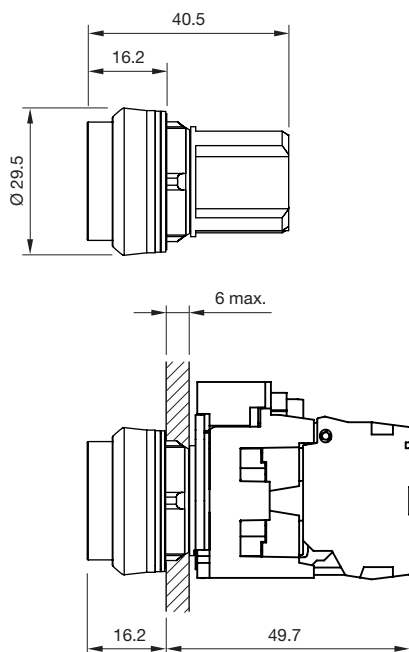


Pushbutton, lens lower than front ring (raised design)

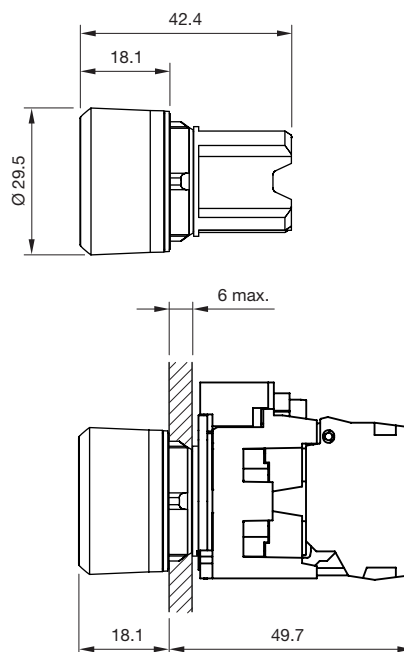


Pushbutton, Illuminated pushbutton, lens lower than front ring (raised design)

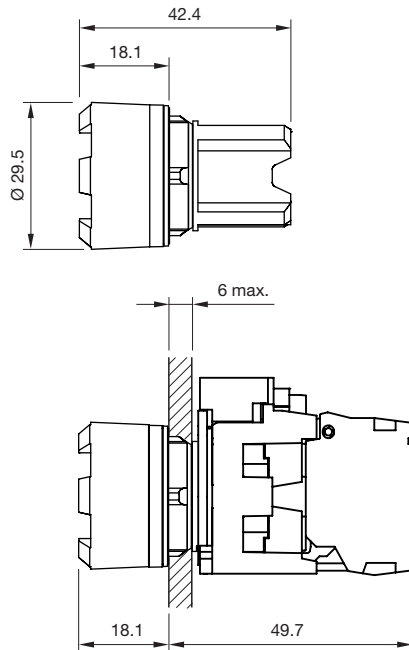


Double pushbutton, Lens level with front ring (raised design)

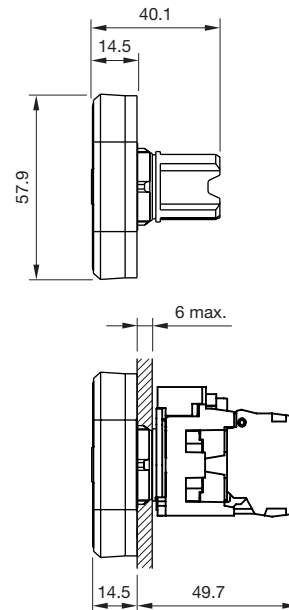


Double pushbutton, level with/raised above front ring (raised design)

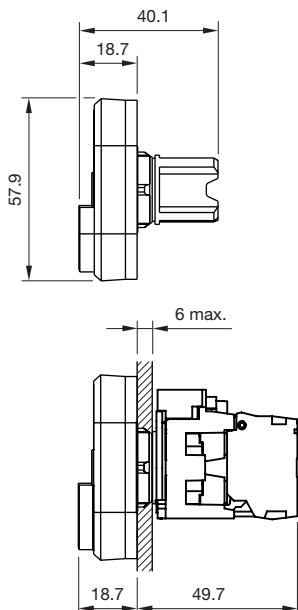


Emergency stop switch Ø 33.8 mm (raised design)

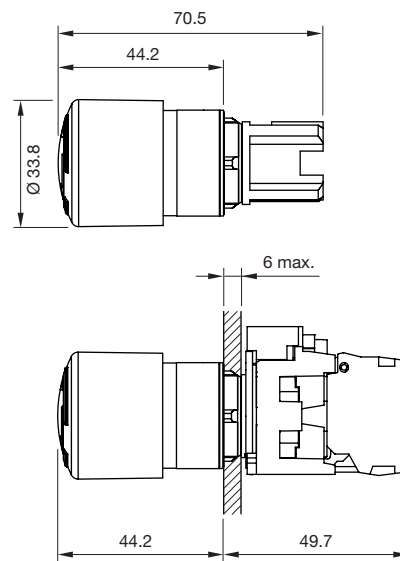


Emergency stop switch, Stop switch Ø 40 mm
(raised design)

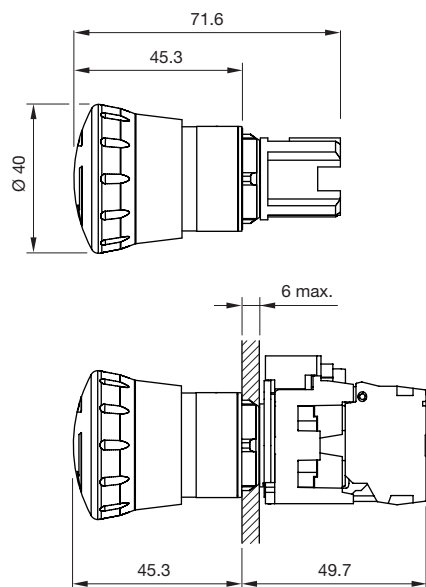


Emergency stop switch, Stop switch Ø 40 mm
(raised design)

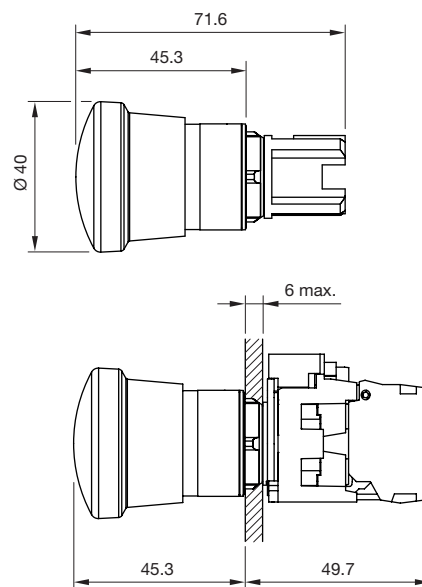


Emergency stop switch Ø 60 mm (raised design)

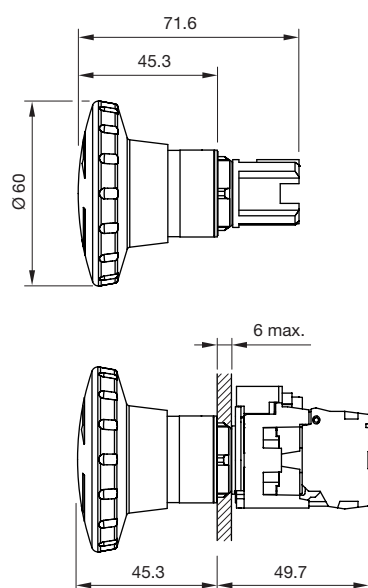


Emergency stop switch with key Ø 40 mm
(raised design)

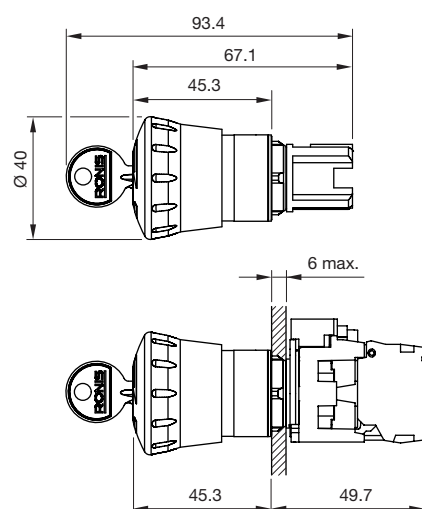


Stop switch Ø 29.5 mm (raised design)

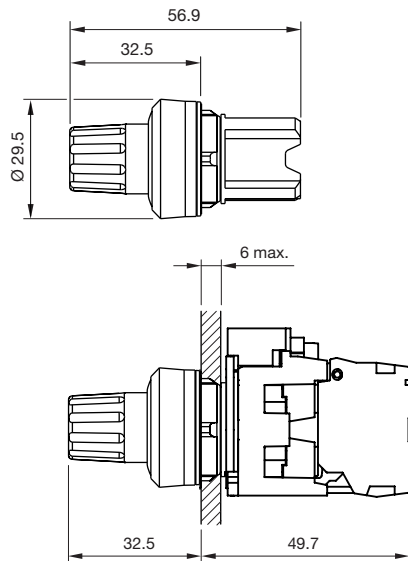


Mushroom-head pushbutton Ø 30 mm (raised design)

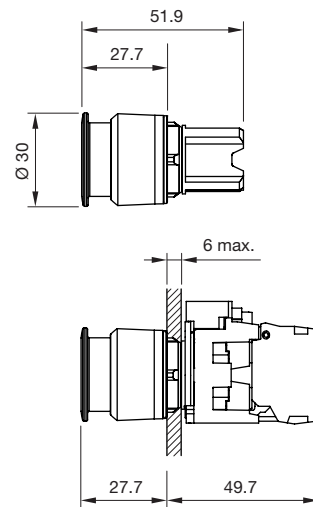


Mushroom-head pushbutton Momentary, Maintain, Ø 40 mm (raised design)

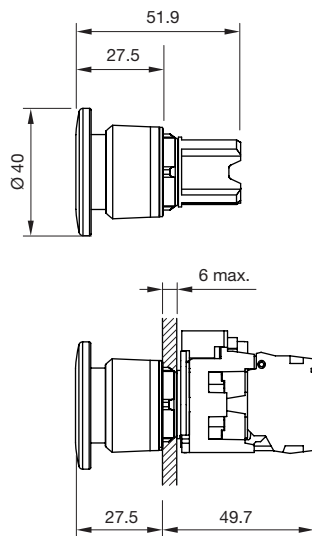


Mushroom-head pushbutton Momentary/Maintain, Momentary/Momentary, Ø 40 mm (raised design)

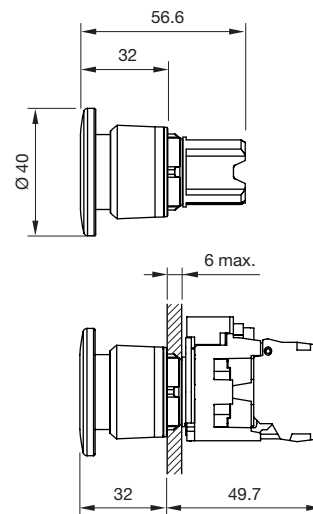


Mushroom-head pushbutton Ø 60 mm (raised design)

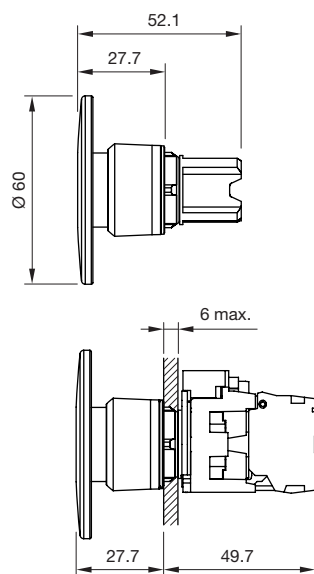


Keylock switch (raised design)

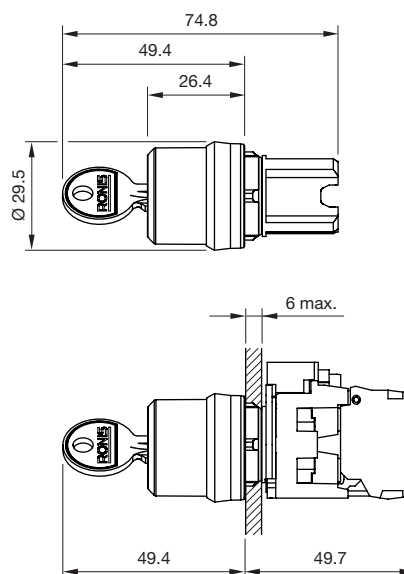


ID keylock switch (raised design)

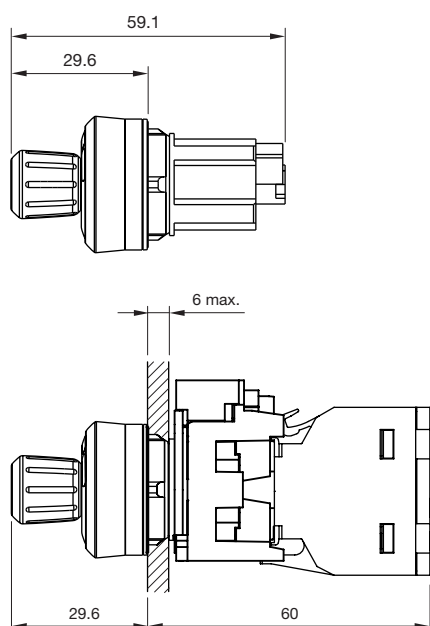


Selector switch, round lever (raised design)

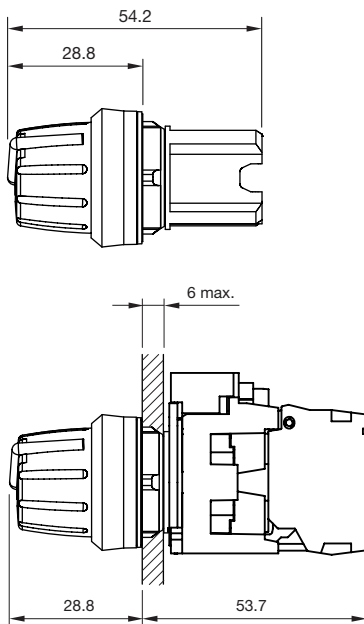


Selector switch, short lever (raised design)

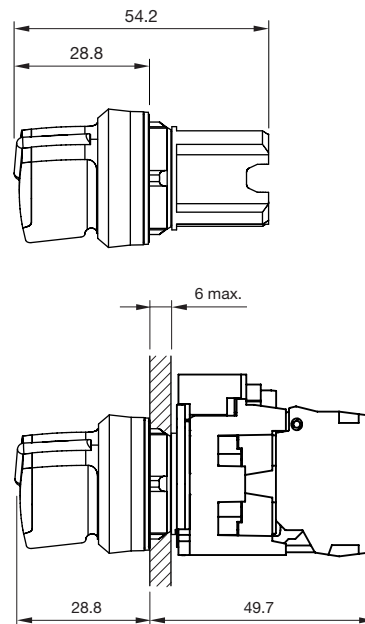


Selector switch, long lever (raised design)

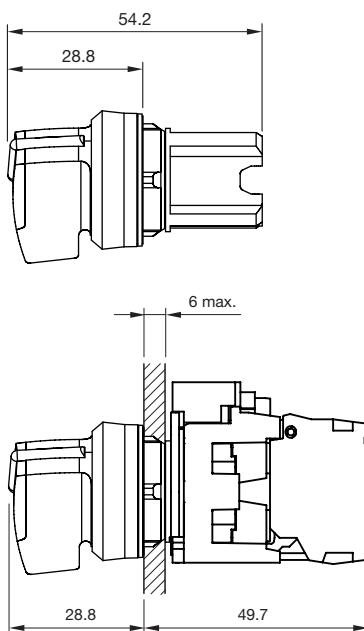


Potentiometer (raised design)

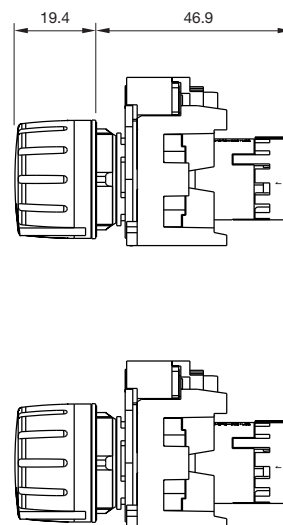

Toggle stick (raised design)

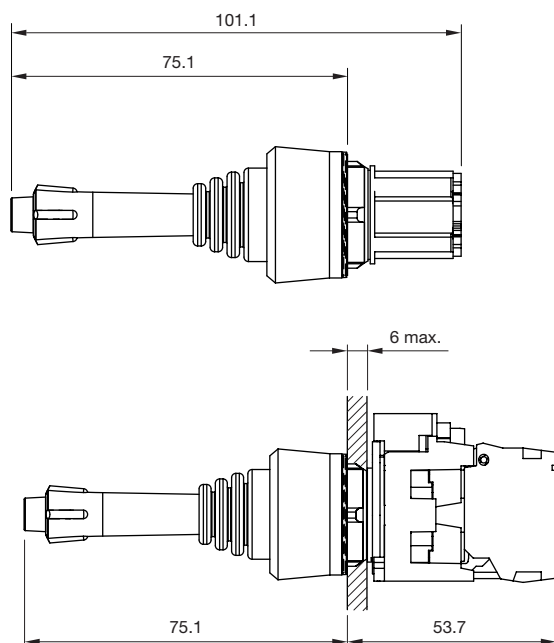

Toggle switch (raised design)

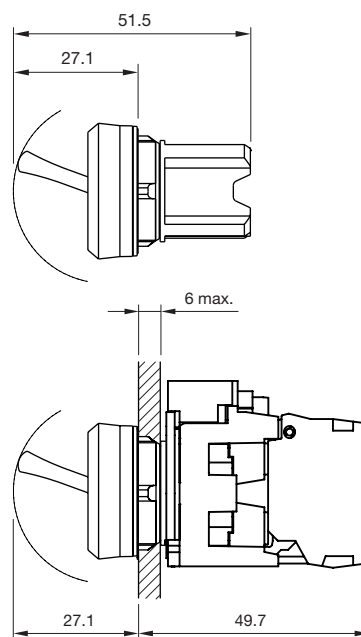

Indicator actuator

Material

Actuator element

Plastic

Front ring

Plastic or metal

Actuator housing

Plastic or metal

Mechanical characteristics

Vibration resistance

according to IEC 60068-2-6

2 ... 500 Hz: 5 g

Shock resistance

according to IEC 60068-2-27

Sinusoidal half-wave 50 g /11 ms

Environmental conditions

Operating temperature

-25 °C ... +70 °C

Storage temperature

-40 °C ... +80 °C

Protection degree

IP66, IP67, IP69K

Environmental category

during operation according to IEC 60721:

3K6, 3C3, 3S2, 3M6

Pushbutton actuator

Material

Actuator element

Plastic

Front ring

Plastic or metal

Actuator housing

Plastic or metal

Mechanical characteristics

Operating frequency

Lens flat/level with front bezel:

- Momentary max. 3 600/h

- Maintain max. 1 800/h

Lens flat/raised above front ring:

- Momentary max. 3 600/h

- Maintain max. 1 800/h

Lens flat/lower than front ring:

- Momentary max. 3 600/h

Lens flat/lower than front ring, with castellation:

- Momentary max. 3 600/h

Mechanical lifetime

Lens flat/level with front bezel:

- Momentary 10 000 000 switching cycles

- Maintain 500 000 switching cycles

Lens flat/raised above front ring:

- Momentary 10 000 000 switching cycles

- Maintain 500 000 switching cycles

Lens flat/lower than front ring:

- Momentary 10 000 000 switching cycles

Lens flat/lower than front ring, with castellation:

- Momentary 10 000 000 switching cycles

Vibration resistance

according to IEC 60068-2-6

20 ... 500 Hz: 5 g

Shock resistance

according to IEC 60068-2-27

Sinusoidal half-wave 50 g /11 ms

Environmental conditions

Operating temperature

-25 °C ... +70 °C

Storage temperature

-40 °C ... +80 °C

Protection degree

IP66, IP67, IP69K

Environmental category

during operation according to IEC 60721:

3K6, 3C3, 3S2, 3M6

Double pushbutton actuator, Double pushbutton actuator illuminated

Material

Actuator element

Plastic

Front ring

Plastic or metal

Actuator housing

Plastic or metal

Mechanical characteristics

Operating frequency

max. 3 600/h

Mechanical lifetime

2 000 000 switching cycles

Vibration resistance

according to IEC 60068-2-6

10 ... 500 Hz: 5 g

Shock resistance

according to IEC 60068-2-27

Sinusoidal half-wave 50 g /11 ms

Environmental conditions

Operating temperature

–25 °C ... +70 °C

Storage temperature

–40 °C ... +80 °C

Protection degree

IP66, IP67, IP69K

Environmental category

during operation according to IEC 60721:

3K6, 3C3, 3S2, 3M6, 2B2

Illuminated pushbutton actuator

Material

Actuator element

Plastic

Front ring

Plastic or metal

Actuator housing

Plastic or metal

Mechanical characteristics

Operating frequency

Lens flat/level with front bezel:

- Momentary max. 3 600/h

- Maintain max. 1 800/h

Lens flat/raised above front ring:

- Momentary max. 3 600/h

Lens flat/lower than front ring, with castellation:

- Momentary max. 3 600/h

Mechanical lifetime

Lens flat/level with front bezel:

- Momentary 3 000 000 switching cycles

- Maintain 500 000 switching cycles

Lens flat/raised above front ring:

- Momentary 3 000 000 switching cycles

Lens flat/lower than front ring, with castellation:

- Momentary 3 000 000 switching cycles

Vibration resistance

according to IEC 60068-2-6

20 ... 500 Hz: 5 g

Shock resistance

according to IEC 60068-2-27

Sinusoidal half-wave 50 g /11 ms

Environmental conditions

Operating temperature

–25 °C ... +70 °C

Storage temperature

–40 °C ... +80 °C

Protection degree

IP66, IP67, IP69K

Environmental category

during operation according to IEC 60721:

3K6, 3C3, 3S2, 3M6

Emergency stop switch actuator

Material

Actuator element

Plastic red

Actuator housing

Plastic or metal

Mechanical characteristics

Type of unlocking device

Twist to release, pull release or
key to release

Operating frequency

max. 600/h

Mechanical lifetime

300 000 switching cycles

Vibration resistance

according to IEC 60068-2-6
2 ... 500 Hz: 5 g

Shock resistance

according to IEC 60068-2-27
Sinusoidal half-wave 50 g /11 ms

Environmental conditions

Operating temperature

-25 °C ... +70 °C

Storage temperature

-40 °C ... +80 °C

Protection degree

IP66, IP67, IP69K

Environmental category

during operation according to IEC 60721:
3K6, 3C3, 3S2, 3M6

Stop switch actuator

Material

Actuator element

Plastic red

Actuator housing

Plastic or metal

Mechanical characteristics

Type of unlocking device

Twist to release

Operating frequency

max. 600/h

Mechanical lifetime

300 000 switching cycles

Vibration resistance

according to IEC 60068-2-6
2 ... 500 Hz: 5 g

Shock resistance

according to IEC 60068-2-27
Sinusoidal half-wave 50 g /11 ms

Environmental conditions

Operating temperature

-25 °C ... +70 °C

Storage temperature

-40 °C ... +80 °C

Protection degree

IP66, IP67, IP69K

Environmental category

during operation according to IEC 60721:
3K6, 3C3, 3S2, 3M6

Mushroom-head pushbutton actuator

Material

Actuator element

Plastic

Actuator housing

Plastic or metal

Mechanical characteristics

Type of unlocking device

Pull release

Operating frequency

- Momentary max. 3 600/h
- Maintain max. 1 800/h

Mechanical lifetime

- Momentary 10 000 000 switching cycles
- Maintain 500 000 switching cycles

Vibration resistance

according to IEC 60068-2-6

20 ... 500 Hz: 5 g

Shock resistance

according to IEC 60068-2-27

Sinusoidal half-wave 50 g /11 ms

Environmental conditions

Operating temperature

-25 °C ... +70 °C

Storage temperature

-40 °C ... +80 °C

Protection degree

IP66, IP67, IP69K

Environmental category

during operation according to IEC 60721:

3K6, 3C3, 3S2, 3M6

Keylock switch actuator

Material

Actuator element

Metal

Front ring

Plastic or metal

Actuator housing

Plastic or metal

Mechanical characteristics

Operating frequency

max. 1800/h

Mechanical lifetime

1 000 000 switching cycles

Vibration resistance

according to IEC 60068-2-6

10 ... 500 Hz: 5 g

Shock resistance

according to IEC 60068-2-27

Sinusoidal half-wave 50 g /11 ms

Environmental conditions

Operating temperature

-25 °C ... +70 °C

Storage temperature

-40 °C ... +80 °C

Protection degree

IP66, IP67, IP69K

Environmental category

during operation according to IEC 60721:

3K6, 3C3, 3S2, 3M6

ID keylock switch

Material

Actuator element

Plastic

Front ring

Plastic or metal

Actuator housing

Plastic

Number of NO contacts

5

ID-Key

Authorization level

Key colour

1

green

1+2

yellow

1+2+3

red

1+2+3+4

blue

Mechanical characteristics

Terminals

Screw terminal front mounting

- Solid with end sleeves

1 x (0.2 ... 2.5 mm²), 2 x (0.2 ... 0.75 mm²)

- Solid without end sleeves

1 x (0.2 ... 2.5 mm²), 2 x (0.2 ... 0.75 mm²)

- Finely stranded with end sleeves

1 x (0.2 ... 2.5 mm²), 2 x (0.25 ... 0.75 mm²)

- Finely stranded with end sleeves

1 x (0.2 ... 2.5 mm²), 2 x (0.2 ... 0.75 mm²)

- For AWG cables

1 x (24 ... 14), (24 ... 19)

Tightening torque

Screw terminal

0.35 ... 0.4 Nm

Mechanical lifetime

100 000 switching cycles

Electrical characteristics

Operating voltage

24 VDC

Environmental conditions

Operating temperature

-25 °C ... +70 °C

Storage temperature

-40 °C ... +80 °C

Protection degree

IP65

Environmental category

during operation according to IEC 60721:

3M6, 3S2, 3B2, 3C3, 3K6 (with relative air humidity of 10 ... 95 %)

Selector switch actuator

Material

Actuator element

Round lever, plastic, illuminable

Short lever, plastic, illuminable

Long lever, plastic, illuminable

Front ring

Plastic or metal

Actuator housing

Plastic or metal

Mechanical characteristics

Operating frequency

max. 1800/h

Mechanical lifetime

1 000 000 switching cycles

Vibration resistance

according to IEC 60068-2-6

10 ... 500 Hz: 5 g

Shock resistance

according to IEC 60068-2-27

Sinusoidal half-wave 50 g / 11 ms

Environmental conditions

Operating temperature

-25 °C ... +70 °C

Storage temperature

-40 °C ... +80 °C

Protection degree

IP66, IP67, IP69K

Environmental category

during operation according to IEC 60721:

3K6, 3C3, 3S2, 3M6

Potentiometer

Material

Actuator element

Round lever, plastic

Front ring

Plastic or metal

Actuator housing

Plastic or metal

Mechanical characteristics

Terminals

Screw terminal

- Solid 2 x (1.0 ... 1.5 mm²)
- With end sleeves 2 x (0.5 ... 0.75 mm²)
- Finely stranded
- Without end sleeves 2 x (0.5 ... 0.75 mm²)
- With end sleeves 2 x (0.5 ... 1.5 mm²)
- For AWG cables for auxiliary contacts 2 x (18 ... 14)

Tightening torque

0.8 ... 1 Nm

Operating frequency

max. 1 800/h

Mechanical lifetime

25 000 switching cycles

Vibration resistance

according to IEC 60068-2-6

10 ... 500 Hz: 5 g

Shock resistance

according to IEC 60068-2-27

Sinusoidal half-wave 50 g /11 ms

Slewing range

275° ±2°

Electrical characteristics

Active power consumption

0.5 W

Insulation voltage

Rated value 500 V

Environmental conditions

Operating temperature

–25 °C ... +70 °C

Storage temperature

–40 °C ... +80 °C

Protection degree

IP66, IP67, IP69K

Environmental category

during operation according to IEC 60721:

3K6, 3C3, 3S2, 3M6

Toggle stick actuator

Material

Actuator element

Plastic

Front ring

Plastic or metal

Actuator housing

Plastic or metal

Mechanical characteristics

Operating frequency

3 600/h

Mechanical lifetime

Momentary: 250 000 switching cycles

Vibration resistance

according to IEC 60068-2-6

10 ... 500 Hz: 5 g

Shock resistance

according to IEC 60068-2-27

Sinusoidal half-wave 50 g /11 ms

Environmental conditions

Operating temperature

-25 °C ... +70 °C

Storage temperature

-40 °C ... +80 °C

Protection degree

IP65, IP67

Environmental category

during operation according to IEC 60721:

3K6, 3C3, 3S2, 3M6

Toggle switch actuator

Material

Actuator element

Plastic

Front ring

Plastic or metal

Actuator housing

Plastic or metal

Mechanical characteristics

Operating frequency

max. 1 800/h

Mechanical lifetime

1 000 000 switching cycles

Vibration resistance

according to IEC 60068-2-6

10 ... 500 Hz: 5 g

Shock resistance

according to IEC 60068-2-27

Sinusoidal half-wave 50 g /11 ms

Environmental conditions

Operating temperature

-25 °C ... +70 °C

Storage temperature

-40 °C ... +80 °C

Protection degree

IP66, IP67, IP69K

Environmental category

during operation according to IEC 60721:

3K6, 3C3, 3S2, 3M6

Slow-make switching element

Switching system

The double-break, slow-make switching element is equipped with normally open or normally closed contact. The normally closed contact has forced opening. Slow-make contacts with forced action are ideal for high switch ratings. Up to six switching elements can be snapped to each holder.

The NC contact opens automatically upon disconnection of the actuator. On delivery, the contact is open (= safe state). Activation (= NC contacts on the non-actuated commanding device are closed) takes place upon first-time actuation after the contact block is snapped onto the actuator.

Material

Material of contact

Silver alloy

Housing

Plastic

Mechanical characteristics

Terminals

Screw terminal

- Solid 2 x (1.0 ... 1.5 mm²)
- With end sleeves 2 x (0.5 ... 0.75 mm²)
- Finely stranded
- Without end sleeves 2 x (0.5 ... 0.75 mm²)
- With end sleeves 2 x (0.5 ... 1.5 mm²)
- For AWG cables for auxiliary contacts 2 x (18 ... 14)

Spring-type terminal (SP)

- Solid 2 x (0.25 ... 1.5 mm²)
- Finely stranded
- Without end sleeves 2 x (0.5 ... 1.5 mm²)
- With end sleeves 2 x (0.5 ... 0.75 mm²)
- For AWG cables for auxiliary contacts 2 x (24 ... 16)

Tightening torque

Screw terminal, spring-type terminal 0.8 ... 0.9 Nm

Operating frequency

max. 3 600/h

Mechanical lifetime

10 000 000 switching cycles

Vibration resistance

according to IEC 60068-2-6
2 ... 500 Hz: 5 g

Shock resistance

according to IEC 60068-2-27
Sinusoidal half-wave 50 g / 11 ms

Electrical characteristics

Standards

The switches comply with the "Standards for low-voltage switching devices" EN IEC 60947-5-1

Thermal current

10 A

Insulation voltage

Rated value 500 V

Pollution degree

3

Surge voltage resistance

Rated value 6 kV

Contact reliability

One contact failure per 100 million switching operations
(17 V, 5 mA)

One contact failure per 10 million switching operations (5 V, 1 mA)

Operating voltage

at AC

- Rated value 5 ... 500 V

at DC

- Rated value 5 ... 500 V

Operating current

at AC-12

Voltage	24 V	230 V	500 V
Current	10 A	10 A	10 A

at AC-15

Voltage	24V	230 V	400 V	500 V
Current	6 A	6 A	3 A	1.4 A

at DC-12

Voltage	24 V	48 V	110 V	230 V	400 V	500 V
Current	10 A	5 A	2.5 A	1 A	0.3 A	0.2 A

at DC-13

Voltage	24 V	48 V	110 V	230 V	400 V	500 V
Current	3 A	1.5 A	0.7 A	0.3 A	0.1 A	0.07 A

Environmental conditions

Operating temperature

-25 °C ... +70 °C

Storage temperature

-40 °C ... +80 °C

Protection degree

Housing IP40
Terminal IP20

Environmental category

during operation according to IEC 60721:
3K6, 3C3, 3S2, 3M6

Approvals

Approbations

CCC
CSA
UL

Declaration of conformity

CE

Illumination element

Material

Housing

Plastic

Mechanical characteristics

Terminals

Screw terminal
- Solid 2 x (1.0 ... 1.5 mm²)
- With end sleeves 2 x (0.5 ... 0.75 mm²)
- Finely stranded
- Without end sleeves 2 x (0.5 ... 0.75 mm²)
- With end sleeves 2 x (0.5 ... 1.5 mm²)
- For AWG cables for auxiliary contacts 2 x (18 ... 14)

Spring-type terminal (SP)

- Solid 2 x (0.25 ... 1.5 mm²)
- Finely stranded
- Without end sleeves 2 x (0.5 ... 1.5 mm²)
- With end sleeves 2 x (0.5 ... 0.75 mm²)
- For AWG cables for auxiliary contacts 2 x (24 ... 16)

Tightening torque

Screw terminal, spring-type terminal 0.8 ... 0.9 Nm

Shock resistance

according to IEC 60068-2-27
Sinusoidal half-wave 50 g /11 ms

Vibration resistance

according to IEC 60068-2-6
2 ... 500 Hz: 5 g

Electrical characteristics

Standards

The switches comply with the "Standards for low-voltage switching devices" EN IEC 60947-5-1

Electrical life

100 000 h

Insulation voltage

Rated value 320 V

Surge voltage resistance

Rated value 4 kV

Environmental conditions

Operating temperature

-25 °C ... +70 °C

Storage temperature

-40 °C ... +80 °C

Protection degree

Terminal IP20

Environmental category

during operation according to IEC 60721:
3K6, 3C3, 3S2, 3M6

Approvals

Approbations

CCC
CSA
UL

Declaration of conformity

CE

Inscription marking plates and legend plates

Labels can be inserted for identification purposes in illuminated pushbuttons and pushbuttons with a flat lens. This marking plates are made of translucent plastic with a black inscription, which can be fitted in any 90° angle.

Standard texts for marking plates

Example		Part No. 45-563.0K00.T00029
----------------	---	-----------------------------

Standard texts German		Standard texts English	
Ein	Part No. 45-563.0K00.T00001	On	Part No. 45-563.0K00.T00020
Aus	Part No. 45-563.0K00.T00002	Off	Part No. 45-563.0K00.T00021
Auf	Part No. 45-563.0K00.T00003	Up	Part No. 45-563.0K00.T00022
Ab	Part No. 45-563.0K00.T00004	Down	Part No. 45-563.0K00.T00023
Vor	Part No. 45-563.0K00.T00005	Forward	Part No. 45-563.0K00.T00024
Zurück	Part No. 45-563.0K00.T00006	Right	Part No. 45-563.0K00.T00026
Rechts	Part No. 45-563.0K00.T00007	Left	Part No. 45-563.0K00.T00027
Links	Part No. 45-563.0K00.T00008	Stop	Part No. 45-563.0K00.T00028
Halt	Part No. 45-563.0K00.T00009	Start	Part No. 45-563.0K00.T00029
Zu	Part No. 45-563.0K00.T00010	Reset	Part No. 45-563.0K00.T00030
Schnell	Part No. 45-563.0K00.T00011	Test	Part No. 45-563.0K00.T00031
Langsam	Part No. 45-563.0K00.T00012	Open	Part No. 45-563.0K00.T00032
Betrieb	Part No. 45-563.0K00.T00013	Close	Part No. 45-563.0K00.T00033
Störung	Part No. 45-563.0K00.T00014	Running	Part No. 45-563.0K00.T00035
Einrichten	Part No. 45-563.0K00.T00018	Fast	Part No. 45-563.0K00.T00044
		Slow	Part No. 45-563.0K00.T00045

Symbols for marking plates


Graphic symbols are according to ISO 7000 or IEC 60417.

 Part No. 45-563.0K00.S00001	 Part No. 45-563.0K00.S00012 Decrease, Minus	 Part No. 45-563.0K00.S00023 Unlock
 Part No. 45-563.0K00.S00002	 Part No. 45-563.0K00.S00013 Electric motor	 Part No. 45-563.0K00.S00024 Setting
 Part No. 45-563.0K00.S00003	 Part No. 45-563.0K00.S00014 Horn	 Part No. 45-563.0K00.S00025 On-Off momentary contact type
 Part No. 45-563.0K00.S00004	 Part No. 45-563.0K00.S00015 Water tap	 Part No. 45-563.0K00.S00026 Manual operating
 Part No. 45-563.0K00.S00005 Arrow direction to right	 Part No. 45-563.0K00.S00016 Pump	 Part No. 45-563.0K00.S00027 Automatic cycle
 Part No. 45-563.0K00.S00006 Arrow direction up	 Part No. 45-563.0K00.S00017 Coolant pump	 Part No. 45-563.0K00.S00028 Suction
 Part No. 45-563.0K00.S00007 Clockwise rotation	 Part No. 45-563.0K00.S00018 Lock, tighten	 Part No. 45-563.0K00.S00029 Blowing
 Part No. 45-563.0K00.S00008 Counterclockwise rotation	 Part No. 45-563.0K00.S00019 Unlock, unclamp	
 Part No. 45-563.0K00.S00009 Rapid traverse	 Part No. 45-563.0K00.S00020 Brake	
 Part No. 45-563.0K00.S00010 Feed	 Part No. 45-563.0K00.S00021 Release brake	
 Part No. 45-563.0K00.S00011 Increase, Plus	 Part No. 45-563.0K00.S00022 Interlock	

Customized inscription for marking plates

All dimensions in mm

Height of letters h	Number of lines	Number of letters per line (target value)		
		b1	b2	b3
4	1	10	–	–
3	2	–	8	–
	3	10	–	6

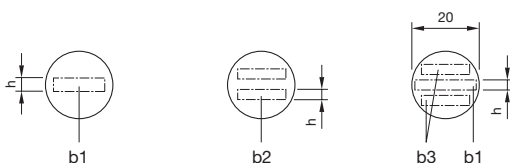

The gap between two words results in each case a letter less.

Standard texts for legend plates black, 27 x 12.5 mm

Example	Reset	Part No. 45-573.1102.T00030
----------------	--------------	-----------------------------

Standard texts German		Standard texts English		Standard texts French	
Ein	Part No. 45-573.1102.T00001	On	Part No. 45-573.1102.T00020	Marche	Part No. 45-573.1102.T00048
Aus	Part No. 45-573.1102.T00002	Off	Part No. 45-573.1102.T00021	Arrêt	Part No. 45-573.1102.T00049
Auf	Part No. 45-573.1102.T00003	Up	Part No. 45-573.1102.T00022	Montée	Part No. 45-573.1102.T00050
Ab	Part No. 45-573.1102.T00004	Down	Part No. 45-573.1102.T00023	Descente	Part No. 45-573.1102.T00051
Vor	Part No. 45-573.1102.T00005	Forward	Part No. 45-573.1102.T00024	Avant	Part No. 45-573.1102.T00052
Zurück	Part No. 45-573.1102.T00006	Reverse	Part No. 45-573.1102.T00025	Retour	Part No. 45-573.1102.T00053
Rechts	Part No. 45-573.1102.T00007	Right	Part No. 45-573.1102.T00026	Droite	Part No. 45-573.1102.T00054
Links	Part No. 45-573.1102.T00008	Left	Part No. 45-573.1102.T00027	Gauche	Part No. 45-573.1102.T00055
Halt	Part No. 45-573.1102.T00009	Stop	Part No. 45-573.1102.T00028	Ouvert	Part No. 45-573.1102.T00056
Zu	Part No. 45-573.1102.T00010	Start	Part No. 45-573.1102.T00029	Fermé	Part No. 45-573.1102.T00057
Betrieb	Part No. 45-573.1102.T00013	Reset	Part No. 45-573.1102.T00030	Rapide	Part No. 45-573.1102.T00058
Störung	Part No. 45-573.1102.T00014	Test	Part No. 45-573.1102.T00031	En Service	Part No. 45-573.1102.T00059
Hand Auto	Part No. 45-573.1102.T00015	Open	Part No. 45-573.1102.T00032	Default	Part No. 45-573.1102.T00060
Hand O Auto	Part No. 45-573.1102.T00017	Close	Part No. 45-573.1102.T00033	Reglage	Part No. 45-573.1102.T00061
		Jog	Part No. 45-573.1102.T00034	Arrêt d'urgence	Part No. 45-573.1102.T00062
		Running	Part No. 45-573.1102.T00035	Hors service	Part No. 45-573.1102.T00063
		Fault	Part No. 45-573.1102.T00036	Sous tension	Part No. 45-573.1102.T00064
		Run	Part No. 45-573.1102.T00037	Manu Auto	Part No. 45-573.1102.T00065
		Stop Start	Part No. 45-573.1102.T00038	Marche Arrêt	Part No. 45-573.1102.T00066
		Off On	Part No. 45-573.1102.T00039	Rearmement	Part No. 45-573.1102.T00067
		Power off	Part No. 45-573.1102.T00040		
		Power on	Part No. 45-573.1102.T00041		
		Man O Auto	Part No. 45-573.1102.T00042		
		Man Auto	Part No. 45-573.1102.T00043		

Symbols for legend plates black, 27 x 12.5 mm

Graphic symbols are according to ISO 7000 or IEC 60417.

	Part No. 45-573.1102.S00001		Part No. 45-573.1102.S00007
	Part No. 45-573.1102.S00002		Part No. 45-573.1102.S00009 Arrow/Direction up
	Part No. 45-573.1102.S00005		

Standard texts for legend plates silver, 27 x 12.5 mm

Example	Reset	Part No. 45-573.1A02.T00030
----------------	--------------	-----------------------------

Standard texts German		Standard texts English	
Ein	Part No. 45-573.1A02.T00001	On	Part No. 45-573.1A02.T00020
Aus	Part No. 45-573.1A02.T00002	Off	Part No. 45-573.1A02.T00021
Auf	Part No. 45-573.1A02.T00003	Up	Part No. 45-573.1A02.T00022
Ab	Part No. 45-573.1A02.T00004	Down	Part No. 45-573.1A02.T00023
Vor	Part No. 45-573.1A02.T00005	Stop	Part No. 45-573.1A02.T00028
Zurück	Part No. 45-573.1A02.T00006	Start	Part No. 45-573.1A02.T00029
Rechts	Part No. 45-573.1A02.T00007	Reset	Part No. 45-573.1A02.T00030
Links	Part No. 45-573.1A02.T00008	Test	Part No. 45-573.1A02.T00031
Halt	Part No. 45-573.1A02.T00009	Open	Part No. 45-573.1A02.T00032
Zu	Part No. 45-573.1A02.T00010	Close	Part No. 45-573.1A02.T00033
Schnell	Part No. 45-573.1A02.T00011	Man O Auto	Part No. 45-573.1A02.T00042
Langsam	Part No. 45-573.1A02.T00012	Man Auto	Part No. 45-573.1A02.T00043
Betrieb	Part No. 45-573.1A02.T00013	Running	Part No. 45-573.1A02.T00035
Störung	Part No. 45-573.1A02.T00014	Fault	Part No. 45-573.1A02.T00036
Hand Auto	Part No. 45-573.1A02.T00015	Fast	Part No. 45-573.1A02.T00044
Stop Start	Part No. 45-573.1A02.T00016	Slow	Part No. 45-573.1A02.T00045
Hand O Auto	Part No. 45-573.1A02.T00017		

Symbols for legend plates silver, 27 x 12.5 mm

Graphic symbols are according to ISO 7000 or IEC 60417.

	Part No. 45-573.1A02.S00001		Part No. 45-573.1A02.S00006
	Part No. 45-573.1A02.S00002		Part No. 45-573.1A02.S00007
	Part No. 45-573.1A02.S00003		Part No. 45-573.1A02.S00008 Arrow/Direction right
	Part No. 45-573.1A02.S00004		Part No. 45-573.1A02.S00009 Arrow/Direction up
	Part No. 45-573.1A02.S00005		

Standard texts for legend plates black, 27 x 17.5 mm

Example		Part No. 45-573.1103.T00028
----------------	---	-----------------------------


Standard texts German		Standard texts English		Standard texts French	
Ein	Part No. 45-573.1103.T00001	On	Part No. 45-573.1103.T00020	Marche	Part No. 45-573.1103.T00048
Aus	Part No. 45-573.1103.T00002	Off	Part No. 45-573.1103.T00021	Arrêt	Part No. 45-573.1103.T00049
Auf	Part No. 45-573.1103.T00003	Up	Part No. 45-573.1103.T00022	Droite	Part No. 45-573.1103.T00054
Ab	Part No. 45-573.1103.T00004	Down	Part No. 45-573.1103.T00023	Gauche	Part No. 45-573.1103.T00055
Vor	Part No. 45-573.1103.T00005	Forward	Part No. 45-573.1103.T00024	En Service	Part No. 45-573.1103.T00059
Zurück	Part No. 45-573.1103.T00006	Reverse	Part No. 45-573.1103.T00025	Defaut	Part No. 45-573.1103.T00060
Halt	Part No. 45-573.1103.T00009	Right	Part No. 45-573.1103.T00026	Sous tension	Part No. 45-573.1103.T00064
Zu	Part No. 45-573.1103.T00010	Stop	Part No. 45-573.1103.T00028	Manu Auto	Part No. 45-573.1103.T00065
Betrieb	Part No. 45-573.1103.T00011	Start	Part No. 45-573.1103.T00029	Marche Arrêt	Part No. 45-573.1103.T00066
Störung	Part No. 45-573.1103.T00014	Open	Part No. 45-573.1103.T00032	Rearmement	Part No. 45-573.0K00.T00067
Hand Auto	Part No. 45-573.1103.T00015	Close	Part No. 45-573.1103.T00033		
		Running	Part No. 45-573.1103.T00035		
		Fault	Part No. 45-573.1103.T00036		
		Stop Start	Part No. 45-573.1103.T00038		
		Man Auto	Part No. 45-573.1103.T00043		

Symbols for legend plates black, 27 x 12.5 mm

Graphic symbols are according to ISO 7000 or IEC 60417.

	Part No. 45-573.1103.S00001		Part No. 45-573.1103.S00008 Arrow/Direction right
	Part No. 45-573.1103.S00002		Part No. 45-573.1103.S00009 Arrow/Direction up
	Part No. 45-573.1103.S00005		

Standard texts for legend plates silver, 27 x 17.5 mm

Example		Part No. 45-573.1A03.T00028
----------------	---	-----------------------------

Standard texts German		Standard texts English	
Ein	Part No. 45-573.1A03.T00001	On	Part No. 45-573.1A03.T00020
Aus	Part No. 45-573.1A03.T00002	Off	Part No. 45-573.1A03.T00021
Auf	Part No. 45-573.1A03.T00003	Stop	Part No. 45-573.1A03.T00028
Ab	Part No. 45-573.1A03.T00004	Start	Part No. 45-573.1A03.T00029
Vor	Part No. 45-573.1A03.T00005	Reset	Part No. 45-573.1A03.T00030
Zurück	Part No. 45-573.1A03.T00006	Fault	Part No. 45-573.1A03.T00036
Rechts	Part No. 45-573.1A03.T00007	Man O Auto	Part No. 45-573.1A03.T00043
Halt	Part No. 45-573.1A03.T00009		
Zu	Part No. 45-573.1A03.T00010		
Betrieb	Part No. 45-573.1A03.T00013		
Störung	Part No. 45-573.1A03.T00014		
Hand Auto	Part No. 45-573.1A03.T00015		
Hand O Auto	Part No. 45-573.1A03.T00017		

Symbols for legend plates silver, 27 x 17.5 mm

Graphic symbols are according to ISO 7000 or IEC 60417.

	Part No. 45-573.1A02.S00001		Part No. 45-573.1A02.S00007
	Part No. 45-573.1A02.S00002		Part No. 45-573.1A02.S00008 Arrow/Direction right
	Part No. 45-573.1A02.S00005		Part No. 45-573.1A02.S00009 Arrow/Direction up

Standard texts for legend plates black, 27 x 27 mm

Example		Part No. 45-573.1103.T00028
---------	---	-----------------------------

Standard texts German		Standard texts English		Standard texts French	
Ein	Part No. 45-573.1105.T00001	On	Part No. 45-573.1105.T00020	Marche	Part No. 45-573.1105.T00048
Aus	Part No. 45-573.1105.T00002	Off	Part No. 45-573.1105.T00021	Arrêt	Part No. 45-573.1105.T00049
Auf	Part No. 45-573.1105.T00003	Up	Part No. 45-573.1105.T00022	Montée	Part No. 45-573.1105.T00050
Ab	Part No. 45-573.1105.T00004	Down	Part No. 45-573.1105.T00023	Descente	Part No. 45-573.1105.T00051
Vor	Part No. 45-573.1105.T00005	Forward	Part No. 45-573.1105.T00024	En Service	Part No. 45-573.1105.T00059
Zurück	Part No. 45-573.1105.T00006	Reverse	Part No. 45-573.1105.T00025	Defaut	Part No. 45-573.1105.T00060
Rechts	Part No. 45-573.1105.T00007	Stop	Part No. 45-573.1105.T00028	Sous tension	Part No. 45-573.1105.T00064
Links	Part No. 45-573.1105.T00008	Start	Part No. 45-573.1105.T00029	Manu Auto	Part No. 45-573.1105.T00065
Halt	Part No. 45-573.1105.T00009	Stop Start	Part No. 45-573.1105.T00038	Marche Arrêt	Part No. 45-573.1105.T00066
Zu	Part No. 45-573.1105.T00010	EMERGENCY STOP	Part No. 45-573.1105.T00046		
Betrieb	Part No. 45-573.1105.T00013				
Störung	Part No. 45-573.1105.T00014				
Hand Auto	Part No. 45-573.1105.T00015				

Symbols for legend plates black, 27 x 27 mm

Graphic symbols are according to ISO 7000 or IEC 60417.

	Part No. 45-573.1105.S00003		Part No. 45-573.1105.S00008 Arrow/Direction right
---	-----------------------------	---	--

Customized inscription for legend plates

All dimensionen in mm

Size of legend plates	Height of letters	Number of lines
27 x 12.5	4	1
	3.5	2
	2.5	3
27 x 17.5	4	1 – 2
	3	3
27 x 27	4	1 – 5

Up to 11 characters per line are possible.

Suppressor circuits


When switching inductive loads such as relays, DC motors, and DC solenoids, it is always important to absorb surges (e.g. with a diode) to protect the contacts. When these inductive loads are switched off, a counter emf can severely damage switch contacts and greatly shorten lifetime.

Fig. 1 shows an inductive load with a free-wheeling diode connected in parallel. This free-wheeling diode provides a path for the inductor current to flow when the current is interrupted by the switch. Without this free-wheeling diode, the voltage across the coil will be limited only by dielectric breakdown voltages of the circuit or parasitic elements of the coil. This voltage can be kilovolts in amplitude even when nominal circuit voltages are low (e.g. 12VDC) see Fig. 2.


The free-wheeling diode should be chosen so that the reverse breakdown voltage is greater than the voltage driving the inductive load. The DC blocking voltage (V_R) of the free-wheeling diode can be found in the datasheet of a diode. The forward current should be equal or greater than the maximum current flowing through the load.

To get an efficient protection, the free-wheeling diode must be connected as close as possible to the inductive load!

Switching with inductive load
Fig. 1

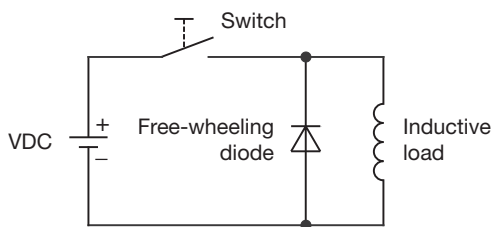

Counter EMF
over load without free-wheeling diode
Fig. 2

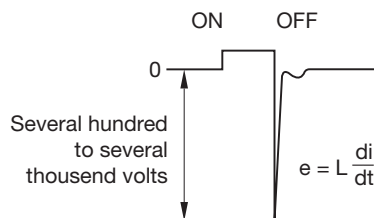

Index from Part No.

Part No.	Page	Part No.	Page	Part No.	Page	Part No.	Page	Part No.	Page
45-2131.1110.000 ... 39		45-2134.1190.000 ... 40		45-2234.31G0.000... 52		45-2630.19H0.000... 80		45-280S.3C50.003 103	45-2828.2D90.001... 98
45-2131.1120.000 ... 39		45-2134.2110.000 ... 43		45-2234.31H0.000... 52		45-2630.19J0.000 ... 80		45-280S.3C60.003 103	45-2828.3C20.001... 95
45-2131.1140.000 ... 39		45-2134.2120.000 ... 43		45-2234.31J0.000... 52		45-2630.19K0.000 ... 81		45-280S.3C90.003 103	45-2828.3C40.001... 96
45-2131.1150.000 ... 39		45-2134.2140.000 ... 43		45-2234.31K0.000... 52		45-2630.28E0.000 ... 78		45-280S.4C20.003 ... 30	45-2828.3C50.001... 95
45-2131.1160.000 ... 39		45-2134.2150.000 ... 43		45-2234.31N0.000... 52		45-2630.28F0.000 ... 78		45-280S.4C50.003 ... 31	45-2828.3C60.001... 96
45-2131.1180.000 ... 39		45-2134.2160.000 ... 43		45-2234.4FE0.000... 24		45-2630.28G0.000... 78		45-280S.4C90.003 ... 31	45-2828.3C90.001... 96
45-2131.1190.000 ... 39		45-2134.2190.000 ... 43		45-2234.4FG0.000... 24		45-2630.28H0.000... 78		45-280S.4D20.003 ... 32	45-2828.3D20.001... 97
45-2131.11K0.000... 39		45-2134.2220.000 ... 45		45-2234.4FH0.000... 24		45-2630.28J0.000 ... 78		45-280S.4D50.003 ... 33	45-2828.3D90.001... 97
45-2131.1210.000 ... 43		45-2134.3110.000 ... 41		45-2234.4FJ0.000 ... 24		45-2630.28K0.000 ... 78		45-280S.4D90.003 ... 33	45-2828.3E20.001... 91
45-2131.1220.000 ... 43		45-2134.3120.000 ... 41		45-2234.4FK0.000... 24		45-2630.29E0.000 ... 82		45-280X.1C20.003. 102	45-2828.3E90.001... 91
45-2131.1240.000 ... 43		45-2134.3140.000 ... 41		45-2300.1000.000 . 133		45-2630.29F0.000 ... 82		45-280X.1C40.003. 102	45-2828.4C20.001... 26
45-2131.1250.000 ... 44		45-2134.3150.000 ... 41		45-2300.2000.000 . 133		45-2630.2A00.000... 82		45-280X.1C50.003. 102	45-2828.4C50.001... 27
45-2131.1260.000 ... 44		45-2134.3160.000 ... 41		45-2400.1000.000 . 134		45-2630.29H0.000... 82		45-280X.1C60.003. 102	45-2828.4C90.001... 27
45-2131.1290.000 ... 44		45-2134.3190.000 ... 42		45-2400.2000.000 . 134		45-2630.29J0.000 ... 82		45-280X.1C90.003. 102	45-2828.4D20.001... 28
45-2131.1310.000 ... 45		45-2134.4F10.000 ... 22		45-2500.1810.000 ... 67		45-2630.29K0.000... 82		45-280X.2C90.003. 105	45-2828.4D50.001... 29
45-2131.1320.000 ... 45		45-2134.4F20.000 ... 22		45-2530.1820.000 ... 67		45-2630.2AE0.000... 84		45-280X.2D20.003. 108	45-2828.4D90.001... 29
45-2131.1340.000 ... 46		45-2134.4F40.000 ... 22		45-2530.1840.000 ... 67		45-2630.2AG0.000 ... 84		45-280X.2D90.003. 108	45-2844.1C20.006... 93
45-2131.1350.000 ... 46		45-2134.4F50.000 ... 22		45-2530.1910.000 ... 70		45-2630.2AH0.000 ... 84		45-280X.3C20.003. 104	45-2844.1C40.006... 93
45-2131.1360.000 ... 46		45-2134.4F60.000 ... 22		45-2530.1920.000 ... 70		45-2630.2AJ0.000 ... 85		45-280X.3C40.003. 104	45-2844.1C50.006... 93
45-2131.1390.000 ... 46		45-2134.4F90.000 ... 22		45-2530.1940.000 ... 70		45-2630.2AK0.000... 85		45-280X.3C50.003. 104	45-2844.1C60.006... 93
45-2131.1410.000 ... 47		45-2231.11E0.000 ... 49		45-2530.1950.000 ... 70		45-2630.38E0.000 ... 77		45-280X.3C60.003. 104	45-2844.1C90.006... 94
45-2131.1420.000 ... 47		45-2231.11F0.000 ... 49		45-2530.1A10.000 ... 74		45-2630.38G0.000... 77		45-280X.3C90.003. 104	45-2844.2C20.006... 94
45-2131.1440.000 ... 48		45-2231.11G0.000... 50		45-2530.1A20.000 ... 74		45-2630.39E0.000... 81		45-2816.1C20.003. 101	45-2844.2C40.006... 94
45-2131.1450.000 ... 48		45-2231.11H0.000... 50		45-2530.2810.000 ... 68		45-2630.39G0.000... 81		45-2816.1C40.003. 101	45-2844.2C50.006... 94
45-2131.1460.000 ... 48		45-2231.11J0.000 ... 50		45-2530.2820.000 ... 69		45-2631.18E0.000 ... 77		45-2816.1C50.003. 101	45-2844.2C60.006... 95
45-2131.1490.000 ... 48		45-2231.11K0.000 ... 50		45-2530.2910.000 ... 72		45-2631.18G0.000... 77		45-2816.1C60.003. 101	45-2844.2C90.006... 95
45-2131.2110.000 ... 42		45-2231.11N0.000... 50		45-2530.2920.000 ... 72		45-2631.18H0.000... 77		45-2816.1C90.003. 102	45-2844.2D40.006... 98
45-2131.2120.000 ... 42		45-2231.12E0.000 ... 54		45-2530.2940.000 ... 72		45-2631.18J0.000 ... 77		45-2816.2C20.003. 105	45-2844.2D50.006... 98
45-2131.2140.000 ... 42		45-2231.12G0.000... 54		45-2530.2A10.000 ... 75		45-2631.18K0.000 ... 77		45-2816.2C50.003. 105	45-2844.2D60.006... 98
45-2131.2150.000 ... 42		45-2231.12H0.000... 54		45-2530.2A20.000 ... 75		45-2631.18N0.000... 77		45-2816.2C90.003. 105	45-2844.2D90.006... 98
45-2131.2160.000 ... 42		45-2231.12J0.000 ... 54		45-2530.3810.000 ... 68		45-2631.19G0.000... 81		45-2816.2D20.003. 108	45-2844.3C20.006... 94
45-2131.2180.000 ... 42		45-2231.12K0.000 ... 54		45-2530.3820.000 ... 68		45-2631.19H0.000... 81		45-2816.2D90.003. 108	45-2844.3C40.006... 94
45-2131.2190.000 ... 42		45-2231.14J0.000 ... 56		45-2530.3910.000 ... 71		45-2631.19K0.000... 81		45-2816.3C20.003. 103	45-2844.3C50.006... 94
45-2131.21K0.000... 42		45-2231.21E0.000 ... 52		45-2530.3920.000 ... 71		45-2631.19N0.000... 81		45-2816.3C40.003. 103	45-2844.3C60.006... 94
45-2131.2210.000 ... 45		45-2231.21F0.000 ... 52		45-2531.1810.000 ... 67		45-2631.28G0.000... 79		45-2816.3C50.003. 103	45-2844.3C90.006... 94
45-2131.2220.000 ... 45		45-2231.21G0.000... 52		45-2531.1820.000 ... 67		45-2631.28H0.000... 79		45-2816.3C60.003. 103	45-2844.4C20.006... 26
45-2131.2240.000 ... 45		45-2231.21H0.000... 53		45-2531.1840.000 ... 68		45-2631.28N0.000... 79		45-2816.3C90.003. 104	45-2844.4C50.006... 26
45-2131.2250.000 ... 45		45-2231.21J0.000 ... 53		45-2531.1850.000 ... 68		45-2631.29F0.000 ... 82		45-2819.1C20.003. 100	45-2844.4C90.006... 26
45-2131.2260.000 ... 45		45-2231.21K0.000... 53		45-2531.1910.000 ... 71		45-2631.29G0.000... 83		45-2819.1C40.003. 100	45-2844.4D20.006... 28
45-2131.2290.000 ... 45		45-2231.21N0.000... 53		45-2531.1920.000 ... 71		45-2631.29H0.000... 83		45-2819.1C50.003. 100	45-2844.4D50.006... 28
45-2131.2310.000 ... 47		45-2231.22E0.000 ... 55		45-2531.1940.000 ... 71		45-2631.29N0.000... 83		45-2819.1C60.003. 100	45-2844.4D90.006... 28
45-2131.2320.000 ... 47		45-2231.22F0.000 ... 55		45-2531.1950.000 ... 71		45-2631.2AF0.000 ... 85		45-2819.1C90.003. 101	45-2845.1E90.002 . 109
45-2131.2340.000 ... 47		45-2231.22G0.000... 55		45-2531.1A10.000 ... 74		45-2631.2AG0.000 ... 85		45-2819.2C20.003. 104	45-2845.2E90.002 . 109
45-2131.2350.000 ... 47		45-2231.22H0.000... 55		45-2531.1A20.000 ... 74		45-2631.2AH0.000 ... 85		45-2819.2C40.003. 104	45-2845.3E90.002 . 109
45-2131.2360.000 ... 47		45-2231.22J0.000 ... 55		45-2531.1A40.000 ... 75		45-2631.2AN0.000 ... 85		45-2819.2C50.003. 104	45-290A.1000.113... 88
45-2131.2390.000 ... 47		45-2231.22K0.000 ... 55		45-2531.1A50.000 ... 75		45-2631.38G0.000... 77		45-2819.2C90.003. 104	45-290A.2000.113... 89
45-2131.3110.000 ... 40		45-2231.22N0.000... 56		45-2531.2810.000 ... 69		45-2631.38H0.000... 78		45-2819.2D20.003. 107	45-290C.1000.113... 88
45-2131.3120.000 ... 40		45-2231.31E0.000 ... 51		45-2531.2820.000 ... 69		45-2631.38K0.000... 78		45-2819.2D50.003. 107	45-290C.2000.113... 89
45-2131.3140.000 ... 40		45-2231.31F0.000 ... 51		45-2531.2840.000 ... 69		45-2631.38N0.000... 78		45-2819.2D90.003. 107	45-290C.3000.113... 89
45-2131.3150.000 ... 40		45-2231.31G0.000 ... 51		45-2531.2850.000 ... 69		45-2631.39G0.000... 81		45-2819.3C20.003. 102	45-290D.1000.113... 88
45-2131.3160.000 ... 41		45-2231.31H0.000... 51		45-2531.2910.000 ... 72		45-2631.39H0.000... 81		45-2819.3C40.003. 102	45-290D.2000.113... 89
45-2131.3180.000 ... 41		45-2231.31J0.000 ... 51		45-2531.2920.000 ... 72		45-2631.39K0.000... 82		45-2819.3C50.003. 102	45-290D.3000.113... 89
45-2131.3190.000 ... 41		45-2231.31K0.000 ... 51		45-2531.2940.000 ... 72		45-2631.39N0.000... 82		45-2819.3C60.003. 102	45-290E.1000.113... 88
45-2131.31K0.000... 41		45-2231.31N0.000 ... 51		45-2531.2950.000 ... 72		45-2632.29E0.000 ... 83		45-2819.3C90.003. 103	45-290E.2000.113... 89
45-2131.3210.000 ... 44		45-2231.32E0.000 ... 54		45-2531.2A10.000 ... 75		45-2632.29H0.000... 83		45-2819.4C20.003... 30	45-290F.1000.113... 88
45-2131.3220.000 ... 44		45-2231.32G0.000... 54		45-2531.2A20.000 ... 75		45-2633.29E0.000 ... 83		45-2819.4C50.003... 30	45-290F.2000.113... 89
45-2131.3240.000 ... 44		45-2231.32H0.000... 54		45-2531.2A40.000 ... 75		45-2633.29N0.000 ... 83		45-2819.4C90.003... 30	45-290F.3000.113... 89
45-2131.3250.000 ... 44		45-2231.32J0.000 ... 55		45-2531.2A50.000 ... 75		45-2729.1010.000 ... 66		45-2819.4D20.003... 32	45-290F.4F00.113... 25
45-2131.3260.000 ... 44		45-2231.32K0.000 ... 55		45-2531.3810.000 ... 68		45-2729.1020.000 ... 66		45-2819.4D50.003... 32	45-290G.1000.113... 88
45-2131.3290.000 ... 44		45-2231.4FE0.000 ... 23		45-2531.3820.000 ... 68		45-2736.1910.000 ... 65		45-2819.4D90.003... 32	45-290G.2000.113... 89
45-2131.3310.000 ... 46		45-2231.4FG0.000... 23		45-2531.3840.000 ... 68		45-2736.1960.000 ... 65		45-2828.1C20.001... 95	45-290G.3000.113... 89
45-2131.3320.000 ... 46		45-2231.4FH0.000... 23		45-2531.3850.000 ... 68		45-280S.1C20.003 101		45-2828.1C40.001... 95	45-290H.1000.111... 86
45-2131.3340.000 ... 46		45-2231.4FJ0.000 ... 23		45-2531.3910.000 ... 71		45-280S.1C40.003 101		45-2828.1C50.001... 95	45-290H.2000.111... 87
45-2131.3350.000 ... 46		45-2231.4FK0.000... 23		45-2531.3920.000 ... 71		45-280S.1C50.003 101		45-2828.1C60.001... 95	45-290H.3000.111... 86
45-2131.3360.000 ... 46		45-2234.11E0.000 ... 50		45-2531.3940.000 ... 71		45-280S.1C60.003 101		45-2828.1C90.001... 95	45-290H.4F00.111... 25
45-2131.3390.000 ... 47		45-2234.11G0.000... 50		45-2531.3950.000 ... 72		45-280S.1C90.003 101		45-2828.1D20.001... 97	45-290J.1000.111 ... 86
45-2131.4F10.000 ... 21		45-2234.11H0.000... 50		45-2532.2910.000 ... 72		45-280S.2C20.003 105		45-2828.1D90.001... 97	45-290J.2000.111 ... 87
45-2131.4F20.000 ... 21		45-2234.11J0.000 ... 50		45-2532.2920.000 ... 73		45-280S.2C30.003 105		45-2828.1E20.001 ... 91	45-290J.3000.111 ... 86
45-2131.4F40.000 ... 21		45-2234.11K0.000 ... 51		45-2533.2910.000 ... 73		45-280S.2C40.003 105		45-2828.1E90.001 ... 91	45-290J.4F00.111 ... 25
45-2131.4F50.000 ... 21		45-2234.11N0.000... 51		45-2533.2920.000 ... 73		45-280S.2C50.003 105		45-2828.2C20.001... 96	45-290J.4F00.116 ... 25
45-2131.4F60.000 ... 21		45-2234.21E0.000 ... 53		45-2630.18E0.000 ... 76		45-280S.2C60.003 105		45-2828.2C30.001... 96	45-290K.1000.116... 86
45-2131.4F90.000 ... 22		45-2234.21G0.000... 53		45-2630.18G0.000... 76		45-280S.2C90.003 105		45-2828.2C50.001... 96	45-290K.2000.116... 87
45-2134.1110.000 ... 39		45-22							

Part No.	Page	Part No.	Page	Part No.	Page	Part No.	Page	Part No.	Page
45-2910.1000.113 ...	88	45-2P02.1E10.000. 110		45-320.1G47.....	138	45-320.2J41	140	45-534.2100	131
45-2910.2000.113 ...	89	45-2P02.2E10.000. 110		45-320.1G48.....	138	45-320.2J42	140	45-535.2100	131
45-2911.1000.113 ...	88	45-2P03.1E10.000. 110		45-320.1H11.....	137	45-320.2J46	140	45-536.2100	131
45-2911.2000.113 ...	89	45-2P03.2E10.000. 110		45-320.1H12.....	137	45-320.2J47	140	45-537.2100	131
45-2911.3000.113 ...	89	45-2P04.1E10.000. 110		45-320.1H16.....	137	45-320.2J48	140	45-538.1100	121
45-2917.1000.113 ...	88	45-2P04.2E10.000. 110		45-320.1H17.....	137	45-320.2N11.....	139	45-539.2400	128
45-2917.2000.113 ...	89	45-2P05.1E10.000. 110		45-320.1H18.....	138	45-320.2N12.....	139	45-539.2800	128
45-2917.3000.113 ...	89	45-2P05.2E10.000. 110		45-320.1H41.....	138	45-320.2N16.....	139	45-542.1K00	126
45-2922.1000.113 ...	88	45-2P06.1E10.000. 110		45-320.1H42.....	138	45-320.2N17.....	139	45-543.1K00	126
45-2922.2000.113 ...	89	45-2P06.2E10.000. 110		45-320.1H46.....	138	45-320.2N18.....	140	45-544.1K00	126
45-2922.3000.113 ...	89	45-2S00.1001.404... 90		45-320.1H47.....	138	45-320.2N41.....	140	45-545.1K00	126
45-2924.1000.113 ...	88	45-2S00.3001.404... 90		45-320.1H48.....	138	45-320.2N42.....	140	45-546.1K00	126
45-2924.2000.113 ...	89	45-2T00.10E0.000... 34		45-320.1J11	137	45-320.2N46.....	140	45-547.1K00	126
45-2924.3000.113 ...	89	45-2T00.10F0.000... 34		45-320.1J12	137	45-320.2N47.....	140	45-548.1K00	126
45-2925.1000.111 ...	86	45-2T00.10G0.000... 34		45-320.1J18	137	45-320.2N48.....	140	45-549.1400	128
45-2925.2000.111 ...	87	45-2T00.10H0.000... 34		45-320.1J17	137	45-320.3E60	141	45-549.1800	128
45-2925.3000.111 ...	86	45-2T00.10J0.000... 34		45-320.1J18	138	45-320.3F60	141	45-550.1400	128
45-2C35.1920.110... 62		45-2T00.10K0.000... 35		45-320.1J41	138	45-320.3G60.....	141	45-552.0100	116
45-2C35.2920.110... 62		45-2T07.10E0.000... 35		45-320.1J42	138	45-320.3H60.....	141	45-552.0200	117
45-2C36.1820.000... 61		45-2T00.20E0.000... 35		45-320.1J46	138	45-320.3J60	141	45-552.0400	117
45-2C36.1920.000... 61		45-2T00.20F0.000... 35		45-320.1J47	138	45-320.3N60.....	141	45-552.0500	117
45-2C36.1A20.000... 62		45-2T00.20G0.000... 35		45-320.1J48	138	45-330.1115	143	45-552.0E00	117
45-2C36.2820.000... 62		45-2T00.20H0.000... 35		45-320.1N11.....	137	45-330.2115	143	45-552.0G00.....	117
45-2C36.2910.000... 65		45-2T00.20J0.000... 35		45-320.1N12.....	137	45-36F.1114.....	142	45-552.0H00.....	117
45-2C36.2920.000... 62		45-2T00.20K0.000... 35		45-320.1N16.....	137	45-410.1401	145	45-552.0J00	117
45-2C37.1920.000... 62		45-2T00.20N0.000... 35		45-320.1N17.....	137	45-410.2403	145	45-552.0K00	117
45-2D36.1820.000... 63		45-2T07.10E0.000... 36		45-320.1N18.....	138	45-420.1401	145	45-553.0100	115
45-2D36.1920.000... 64		45-2T07.10G0.000... 36		45-320.1N41.....	138	45-420.2403	145	45-553.0200	115
45-2D36.1A20.000... 64		45-2T07.10H0.000... 36		45-320.1N42.....	138	45-420.2803	145	45-553.0400	115
45-2D36.2820.000... 63		45-2T07.10J0.000... 36		45-320.1N46.....	138	45-430.1801	145	45-553.0500	115
45-2D36.2920.000... 64		45-2T07.10K0.000... 36		45-320.1N47.....	138	45-430.2803	145	45-553.0600	115
45-2D36.2A20.000... 64		45-2T07.30E0.000... 37		45-320.1N48.....	138	45-440.1801	146	45-553.0900	115
45-2F0T.1010.000... 113		45-2T07.30G0.000... 37		45-320.2E11	139	45-440.2803	146	45-553.0E00	115
45-2F0T.2010.000... 113		45-2T07.30H0.000... 37		45-320.2E12	139	45-450.1801	146	45-553.0F00	116
45-2F0T.3010.000... 113		45-2T07.30J0.000... 37		45-320.2E16.....	139	45-450.2803	146	45-553.0G00.....	116
45-2F0V.1010.000... 113		45-2T07.30K0.000... 37		45-320.2E17	139	45-460.1802	146	45-553.0H00.....	116
45-2F0V.2010.000... 113		45-2T07.4FE0.000... 20		45-320.2E18.....	140	45-460.2804	146	45-553.0J00	116
45-2F0V.3010.000... 113		45-2T07.4FG0.000... 20		45-320.2E41	140	45-470.1802	146	45-553.0K00	116
45-2F13.1010.000... 112		45-2T07.4FH0.000... 20		45-320.2E42.....	140	45-470.2804	146	45-553.0N00.....	116
45-2F13.2010.000... 112		45-2T07.4FJ0.000... 20		45-320.2E46.....	140	45-506.1100	130	45-555.1100	125
45-2F13.3010.000... 112		45-2T07.4FK0.000... 20		45-320.2E47.....	140	45-506.2A00.....	130	45-555.1K00	125
45-2F14.1010.000... 112		45-311.1Z10	135	45-320.2E48.....	140	45-506.3A00.....	130	45-558.0000	125
45-2F14.2010.000... 112		45-311.1Z40	135	45-320.2F11	139	45-507.1100	146	45-560.1100	130
45-2F14.3010.000... 112		45-311.2Z10	136	45-320.2F12	139	45-509.1100	146	45-561.1400	121
45-2F38.1010.000... 113		45-311.2Z40	136	45-320.2F16	139	45-50C.1900.....	147	45-561.140P	121
45-2F38.2010.000... 113		45-312.1Z10	135	45-320.2F17	139	45-50C.2900.....	147	45-562.1400	121
45-2F38.3010.000... 113		45-312.1Z40	135	45-320.2F18	140	45-50D.1900.....	147	45-563.0K00	118
45-2F40.1010.000... 112		45-312.2Z10	136	45-320.2F41	140	45-50D.2900.....	147	45-564.1102	122
45-2F40.2010.000... 112		45-312.2Z40	136	45-320.2F42	140	45-50E.1900.....	147	45-564.1110	123
45-2F40.3010.000... 112		45-320.1E11	137	45-320.2F46	140	45-50E.2900.....	147	45-567.1103	122
45-2J31.15T0.000... 57		45-320.1E12	137	45-320.2F47	140	45-50F.1100.....	126	45-567.1111	123
45-2J31.15V0.000... 58		45-320.1E16	137	45-320.2F48	140	45-50G.0900.....	147	45-569.1105	122
45-2J31.16T0.000... 57		45-320.1E17	137	45-320.2G11.....	139	45-50J.1400	120	45-569.1112	123
45-2J31.16V0.000... 57		45-320.1E18	138	45-320.2G12.....	139	45-50J.140P	120	45-570.1105	123
45-2J31.25T0.000... 58		45-320.1E41	138	45-320.2G16.....	139	45-50J.140Q	120	45-571.1105	124
45-2J31.25V0.000... 58		45-320.1E42	138	45-320.2G17.....	139	45-50J.140S	120	45-572.1105	124
45-2J31.26T0.000... 58		45-320.1E46	138	45-320.2G18.....	140	45-50J.140T	120	45-573.1102	119
45-2J31.26V0.000... 58		45-320.1E47	138	45-320.2G41.....	140	45-50J.140V	120	45-573.1103	119
45-2J31.35T0.000... 58		45-320.1E48	138	45-320.2G42.....	140	45-50J.140W	120	45-573.1104	119
45-2J31.36T0.000... 58		45-320.1F11	137	45-320.2G46.....	140	45-50J.140X	121	45-573.1105	119
45-2J31.36V0.000... 58		45-320.1F12	137	45-320.2G47.....	140	45-50J.140Z	121	45-573.1202	119
45-2K31.15T0.000... 59		45-320.1F16	137	45-320.2G48.....	140	45-50K.1407	120	45-573.1A02	119
45-2K31.15V0.000... 60		45-320.1F17	137	45-320.2H11.....	139	45-50K.1408	120	45-573.1A03	119
45-2K31.16T0.000... 59		45-320.1F18	138	45-320.2H12.....	139	45-50M.1900	144	45-573.1A04	119
45-2K31.16V0.000... 59		45-320.1F41	138	45-320.2H16.....	139	45-50N.1100	129	45-573.1A05	119
45-2K31.35T0.000... 60		45-320.1F42	138	45-320.2H17.....	139	45-50P.0100.....	129	45-574.0600	132
45-2K31.35V0.000... 60		45-320.1F46	138	45-320.2H18.....	140	45-50Q.2100.....	129		
45-2K31.36T0.000... 60		45-320.1F47	138	45-320.2H41.....	140	45-50T.0500.....	132		
45-2K31.36V0.000... 60		45-320.1F48	138	45-320.2H42.....	140	45-50V.0400.....	132		
45-2N39.1010.000... 114		45-320.1G11.....	137	45-320.2H46.....	140	45-50W.0200	132		
45-2N39.2010.000... 114		45-320.1G12.....	137	45-320.2H47.....	140	45-522.0900	132		
45-2N39.3010.000... 114		45-320.1G16.....	137	45-320.2H48.....	140	45-523.1900	144		
45-2N42.1010.000... 114		45-320.1G17.....	137	45-320.2J11	139	45-529.2100	127		
45-2N42.2010.000... 114		45-320.1G18.....	138	45-320.2J12	139	45-530.2100	131		
45-2N42.3010.000... 114		45-320.1G41.....	138	45-320.2J16	139	45-531.2100	131		
45-2P01.1E10.000. 110		45-320.1G42.....	138	45-320.2J17	139	45-532.2100	131		
45-2P01.2E10.000. 110		45-320.1G46.....	138	45-320.2J18	140	45-533.2100	131		

EAO Contact.

Your centre of excellence.

Headquarters

EAO Holding AG
Tannwaldstrasse 88
CH-4600 Olten
Telephone +41 62 286 91 11
info@eao.com

Manufacturing Companies

Switzerland
EAO AG
Tannwaldstrasse 88
CH-4600 Olten
Telephone +41 62 286 91 11
info@eao.com

EAO Systems AG
Tannwaldstrasse 88
CH-4600 Olten
Telephone +41 62 286 91 11
sales.esy@eao.com

China
EAO (Guangzhou) Ltd.
3/F, Block G4, South China
New Materials Innovation Park
31 Kefeng Road,
Guangzhou Science City,
CN-Guangzhou, PRC
Telephone +86 20 3229 0390
sales.ecn@eao.com

Germany
EAO Automotive GmbH & Co. KG
Richard-Wagner-Straße 3
DE-08209 Auerbach/Vogtland
Telephone +49 3744 8264 0
sales.esa@eao.com

North America
EAO Corporation
One Parrott Drive
Shelton
US-CT 06484
Telephone +1 203 951 4600
sales.eus@eao.com

Sales Companies

China
EAO (Guangzhou) Ltd.
3/F, Block G4, South China
New Materials Innovation Park
31 Kefeng Road,
Guangzhou Science City,
CN-Guangzhou, PRC
Telephone +86 20 3229 0390
sales.ecn@eao.com

EAO (Shanghai) Office
Rm. 403, Block 5#,
CIFI Century Square, Lane 28,
NO. 21, Danba Road,
Putuo District
CN-Shanghai PRC
Telephone +86 21 6095 0717
sales.ecn@eao.com

France
EAO France SAS
5, rue Henri François
FR-77330 Ozoir-la-Ferrière
Telephone +33 1 64 43 37 37
sales.efr@eao.com

**Germany, Austria,
Poland, Czech Republic**
EAO GmbH
Langenberger Straße 570
DE-45277 Essen
Telephone +49 201 8587 0
sales.ede@eao.com

Hong Kong (Asia Pacific)
EAO (Far East) Ltd.
Unit A1, 1/F, Block A
Tin On Industrial Building
777 Cheung Sha Wan Road
Lai Chi Kok, Kln
HK-Hong Kong
Telephone +852 27 86 91 41
sales.ehk@eao.com

Italy
EAO Italia S.r.l.
Centro Direzionale Summit –
Palazzo D1
Via Brescia, 28
IT-20063 Cernusco sul Naviglio (MI)
Telephone +39 02 92 471934
sales.eit@eao.com

Japan
EAO Japan Co. Ltd.
Net 1 Mita Bldg. 3F
3-1-4 Mita Minato-ku
JP-Tokyo 108-0073
Telephone +81 3 5444 5411
sales.ejp@eao.com

Netherlands, Belgium
EAO Benelux B.V.
Kamerlingh Onnesweg 46
NL-3316 GL Dordrecht
Telephone +31 78 653 17 00
sales.enl@eao.com

North America
EAO Corporation
One Parrott Drive
Shelton
US-CT 06484
Telephone +1 203 951 4600
sales.eus@eao.com

Sweden
EAO Svenska AB
Box 7032
SE-121 07 Stockholm-Globen
Telephone +46 8 683 86 60
sales.esw@eao.se

Switzerland
EAO Schweiz AG
Tannwaldstrasse 86
CH-4600 Olten
Telephone +41 62 286 95 00
sales.ech@eao.com

United Kingdom
EAO Ltd.
Highland House
Albert Drive
Burgess Hill
GB-West Sussex RH15 9TN
Telephone +44 1444 236 000
sales.euk@eao.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

EAO:

[45-2131.2220.000](#) [45-2T00.20N0.000](#) [45-2T07.4FH0.000](#) [45-2134.2110.000](#) [45-2131.2160.000](#) [45-2231.31J0.000](#)
[45-2231.21G0.000](#) [45-2134.3110.000](#) [45-2234.4FH0.000](#) [45-2231.31G0.000](#) [45-2134.1110.000](#) [45-2131.1220.000](#)
[45-280X.1C90.003](#) [45-2530.1920.000](#) [45-2131.1160.000](#) [45-2131.11K0.000](#) [45-2231.11G0.000](#) [45-2131.4F60.000](#)
[45-2231.4FE0.000](#) [45-2131.1120.000](#) [45-2F0V.1010.000](#) [45-2231.4FK0.000](#) [45-2231.21H0.000](#) [45-2131.3120.000](#)
[45-2F41.1010.000](#) [45-2231.31K0.000](#) [45-2231.21K0.000](#) [45-2231.21N0.000](#) [45-2231.11N0.000](#) [45-2131.2120.000](#)
[45-2300.1000.000](#) [45-2231.31N0.000](#) [45-2F13.1010.000](#) [45-2231.22E0.000](#) [45-2231.21E0.000](#) [45-2T00.10N0.000](#)
[45-2134.4F50.000](#) [45-2231.11K0.000](#) [45-2131.3160.000](#) [45-2231.31E0.000](#) [45-2231.12E0.000](#) [45-2231.11E0.000](#)
[45-320.1N16](#) [45-2T07.10E0.000](#) [45-2231.4FJ0.000](#) [45-312.1Z40](#) [45-2400.1000.000](#) [45-2828.1C90.001](#) [45-](#)
[2131.4F20.000](#) [45-2300.2000.000](#) [45-2828.2C90.001](#) [45-2134.1190.000](#) [45-320.1J16](#) [45-2134.2190.000](#) [45-](#)
[2134.4F10.000](#) [45-2T00.20H0.000](#) [45-50J.1400](#) [45-2D36.1920.000](#) [45-2231.11F0.000](#) [45-2F40.1010.000](#) [45-](#)
[2F43.1010.000](#) [45-2234.4FK0.000](#) [45-2T00.10H0.000](#) [45-2F21.1010.000](#) [45-2131.4F90.000](#) [45-2134.2150.000](#) [45-](#)
[311.1Z10](#) [45-2C36.1920.000](#) [45-2131.1140.000](#) [45-2C36.1820.000](#) [45-2131.2150.000](#) [45-2131.2250.000](#) [45-](#)
[2T00.10E0.000](#) [45-2131.3140.000](#) [45-2134.4F90.000](#) [45-2T00.20E0.000](#) [45-2F26.1010.000](#) [45-2231.31H0.000](#) [45-](#)
[2134.3150.000](#) [45-2131.1150.000](#) [45-2134.1150.000](#) [45-2F14.1010.000](#) [45-290K.1000.116](#) [45-2231.11H0.000](#) [45-](#)
[2131.3150.000](#) [45-320.1G16](#) [45-320.1E16](#) [45-2F19.1010.000](#) [45-2T07.10H0.000](#) [45-2134.1160.000](#) [45-](#)
[2131.2110.000](#) [45-2131.1110.000](#) [45-2F0S.1010.000](#) [45-2T00.10K0.000](#) [45-2T07.4FE0.000](#) [45-2231.4FH0.000](#) [45-](#)
[2131.3110.000](#) [45-2131.4F40.000](#) [45-2131.4F10.000](#) [45-2134.1140.000](#)