


Male Style H 15




Series 8456 – 2 rows (1 x 7 + 1 x 8)

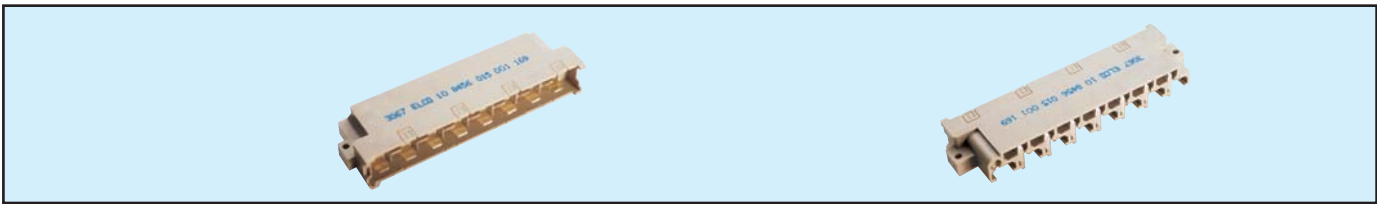


Contact Design and Termination Length	Number of Contacts	Loading Description	Part Number
			Performance classes according to DIN 41612
Right Angled PCB Solder	15	fully loaded	10 8456 015 001 169
		fully loaded + ground z + 32	59 8456 015 000 004
		fully loaded + ground z4 + z32	10 8456 015 101 169
Faston (6.3 x 0.8)	15	fully loaded	10 8456 015 002 169
		fully loaded + ground z + 32	59 8456 015 000 005
		fully loaded + ground z4 + z32	10 8456 015 102 169

NB: Additional Plating & Loading Variations: Please contact your local AVX sales office or distributor.


LOADING DESCRIPTION



15 contacts, fully loaded




15 contacts, fully loaded with ground z32




15 contacts, fully loaded with ground z4 + z32

DIMENSIONS

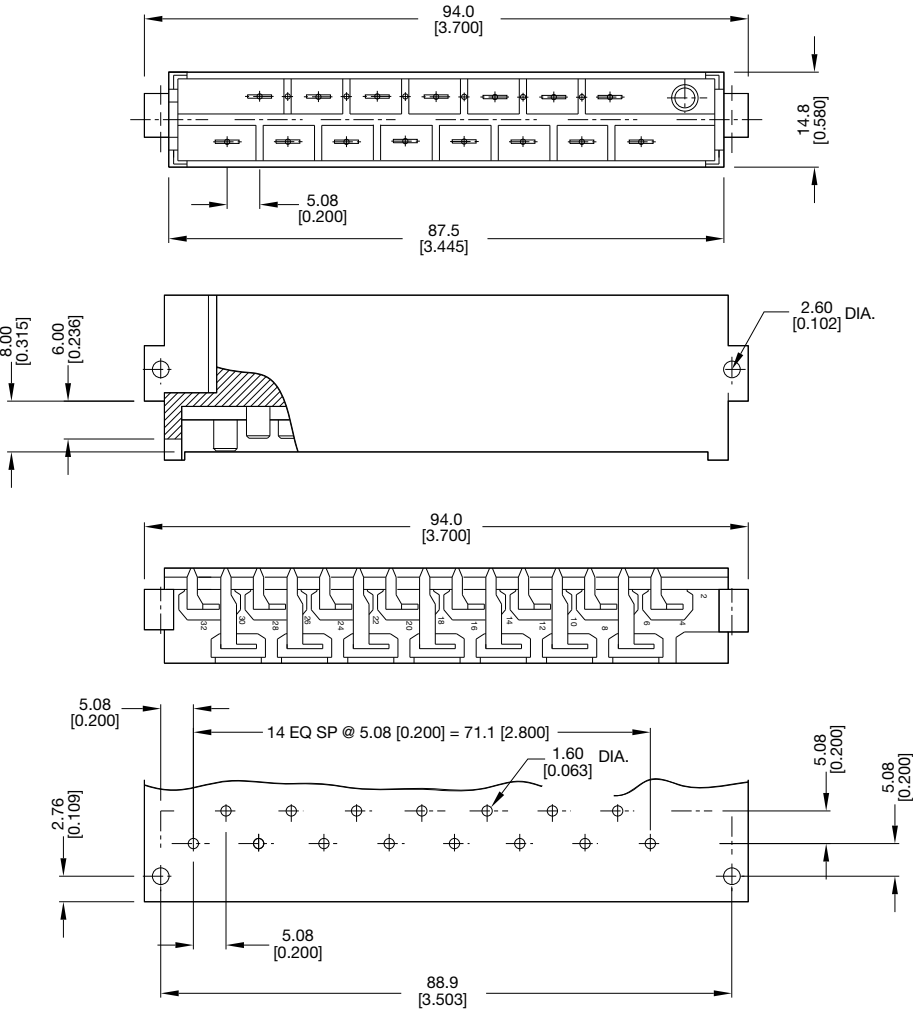

NB: Additional Plating & Loading Variations: Please contact your local AVX sales office or distributor.

DIMENSIONS

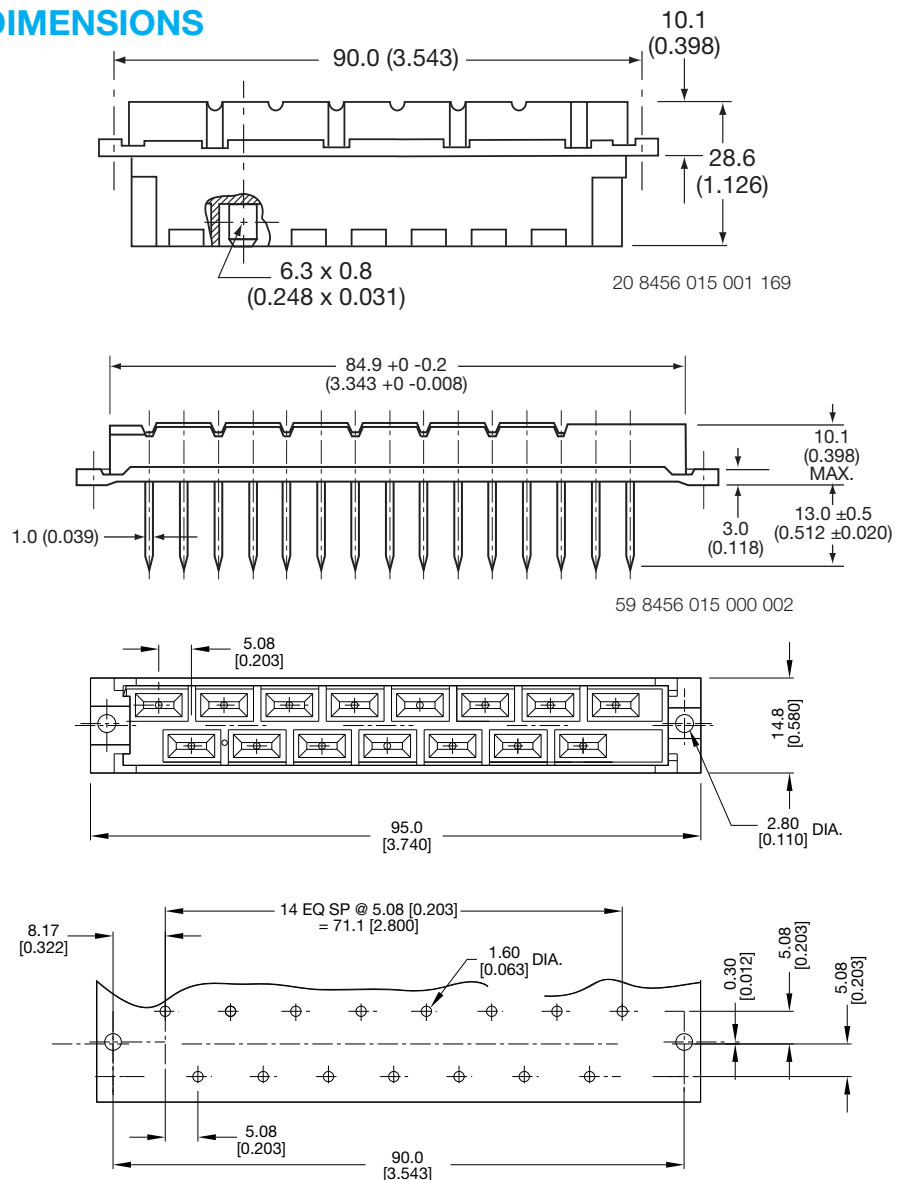

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[AVX:](#)

[108456015001169](#) [598456015000001](#) [598456015000004](#) [208456015001169](#) [108456015002169](#)
[108456015102169](#) [208456015020169](#) [598456015000002](#) [598456015000003](#) [598456015000005](#)