

Fig. 1

- Series 335 and 435 single and double row PCB interconnects offer lowest profile available .070".
- Series 364 and 464 single and double row PCB interconnects offer .085" profile above board.
- Series 335 and 435 use M-M# 3516 pins. (See page 170 for details)
- Series 364 and 464 use MM# 6458 pins. (See page 171 for details)
- Insulators are high temp. thermo-plastic.

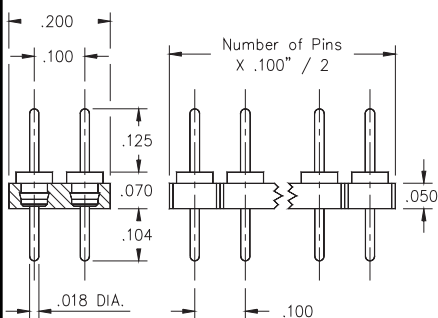


Fig. 2

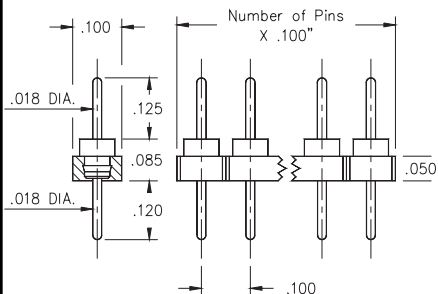


Fig. 3

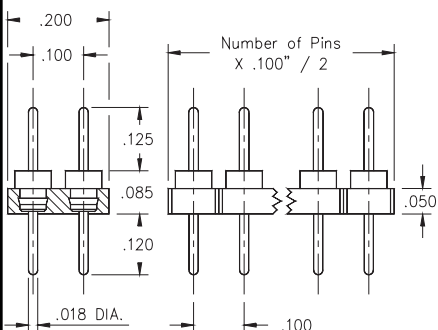


Fig. 4

Ordering Information

Fig. 1	Single Row	.070" Profile Pin Header
	335-XX-1__-00-160000	Specify # of pins → 01-32
Fig. 2	Double Row	.070" Profile Pin Header
	435-XX-2__-00-160000	Specify # of pins → 02-72
Fig. 3	Single Row	.085" Profile Pin Header
	364-XX-1__-00-580000	Specify # of pins → 01-32
Fig. 4	Double Row	.085" Profile Pin Header
	464-XX-2__-00-580000	Specify # of pins → 02-72



XX= Plating Code
See Below

SPECIFY PLATING CODE XX=	10◇	90	40◇	
Pin Plating	10μ" Au	200μ" Sn/Pb	200μ" Sn	