

NAVIGATE THE CATALOG BY SECTION

[1](#)
[2](#)
[3](#)
[4](#)
[5](#)
[6](#)
[7](#)
[8](#)
[9](#)
[10](#)
[11](#)
[12](#)
[13](#)
[14](#)
[15](#)
[16](#)
[17](#)
[18](#)
[19](#)




LAPP ONLINE CATALOG

EPIC® Pin & Sleeve Connectors

20 Amp: North American Version

CEE Angled Female Panel Mount Receptacle

IP 67

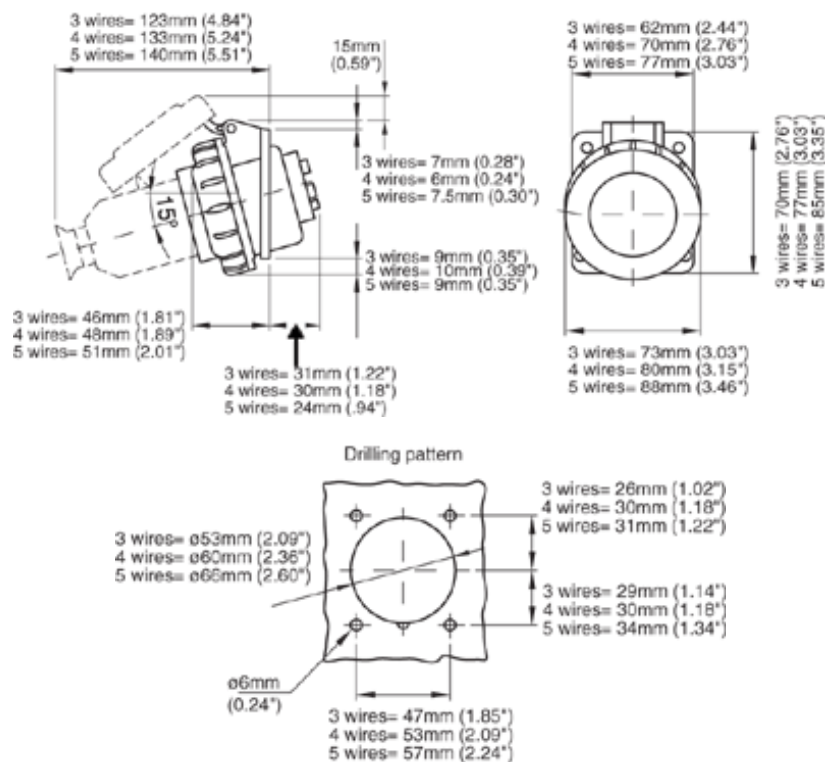

TECHNICAL DATA

Impact Resistance:	8J
Ambient Temperature:	-25°C to 70°C
Flame Resistance:	
➤ Glow Wire Test: Enclosure:	850°C
➤ Glow Wire Test: Contact Enclosure:	850°C
➤ Self-Extinguishing: Enclosure:	UL94-V2
➤ Self-Extinguishing: Contact Carrier:	UL94-V2

PART NUMBERS

Part Number	Voltage	# of Wires	# of Poles	Ground-Clock Position
471263FX	125	3	1+N+PE	4
471363FX	250	3	2+PE	6
471533FX	480	3	2+PE	7
471673FX	250 DC	3	2+PE	3
471863FX	125 / 250	4	2+N+PE	12
471373FX	3Ø250	4	3+PE	9
471573FX	3Ø480	4	3+PE	7
NA	3Ø600	4	3+PE	5
471333FX	3ØY 120 / 208	5	3+N+PE	9
471563FX	3ØY 277 / 480	5	3+N+PE	7
NA	3ØY 347 / 600	5	3+N+PE	5
471723FX	50-250 (500 Hz)	5	3+N+PE	2

MATING COMPONENTS

- [CEE Straight Male Plug with Cable Gland, IP 67](#)
- [CEE 90° Male Plug with Cable Gland, IP 67](#)



DOWNLOAD PDF CATALOG PAGE