

NAVIGATE THE CATALOG BY SECTION

[1](#) [2](#) [3](#) [4](#) [5](#) [6](#) [7](#) [8](#) [9](#) [10](#) [11](#) [12](#) [13](#) [14](#) [15](#) [16](#) [17](#) [18](#) [19](#)




LAPP ONLINE CATALOG

EPIC® Pin & Sleeve Connectors

20 Amp: North American Version

CEE 75° Female Internal Surface Mount Receptacle

IP 44

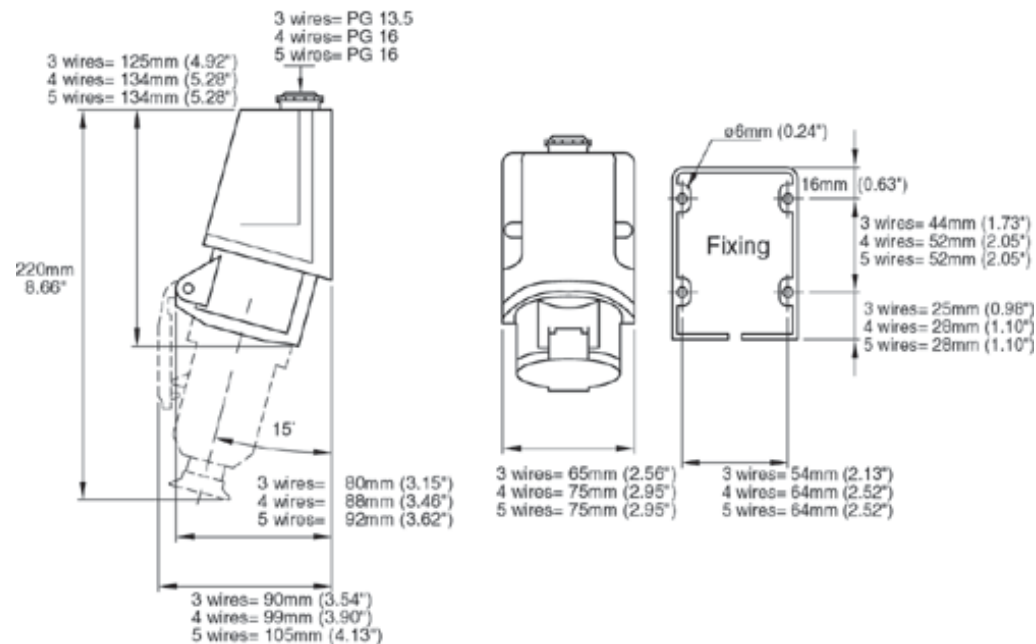

TECHNICAL DATA

Impact Resistance:

8J

Ambient Temperature: -25°C to 70°C

Flame Resistance:

- **Glow Wire Test: Enclosure:** 850°C
- **Glow Wire Test: Contact Enclosure:** 850°C
- **Self-Extinguishing: Enclosure:** UL94-V2
- **Self-Extinguishing: Contact Carrier:** UL94-V2

PART NUMBERS

Part Number	Voltage	# of Wires	# of Poles	Ground-Clock Position
471262FX	125	3	1+N+PE	4
471362FX	250	3	2+PE	6
471552FX	480	3	2+PE	7
471672FX	250 DC	3	2+PE	3
471862FX	125 / 250	4	2+N+PE	12
471372FX	3Ø250	4	3+PE	9
471572FX	3Ø480	4	3+PE	7
NA	3Ø600	4	3+PE	5
471332FX	3ØY 120 / 208	5	3+N+PE	9
471562FX	3ØY 277 / 480	5	3+N+PE	7
NA	3ØY 347 / 600	5	3+N+PE	5
471722FX	50-250 (500 Hz)	5	3+N+PE	2

MATING COMPONENTS

- [MULTIMAX Male Plug with Cable Sleeve, IP 44](#)
- [CEE Straight Male Plug with Cable Gland, IP 44](#)
- [CEE 90° Male Plug with Cable Gland, IP 44](#)



DOWNLOAD PDF CATALOG PAGE
