

ULG

Aluminum Polymer Capacitors

+105°C Very Low ESR




FEATURES

Small size - High ripple current – super low ESR

APPLICATIONS

DC-DC Converters – Voltage regulators – Motherboards
– De-coupling

Operating Temperature Range		-55°C to +105°C							
Capacitance Tolerance		+20% at 120 Hz, 20°C							
Surge Voltage	WVDC	16	20	25	35				
	SVDC	1.15*WVDC							
Dissipation Factor	WVDC	16	20	25	35				
	Tan δ	.12 MAX @120 Hz, 20°C							
Leakage Current		2 Minutes							
		0.2CV or 280uA, Whichever is greater							
Low Temperature Stability Impedance Ratio (100 kHz)	-55°C/ +20°C	≤1.25							
	+105°C/ +20°C	≤1.25							
Load Life		2000 hours at 105°C with rated WVDC and ripple current applied							
		Capacitance Change		≤20% of initial measured value					
		Dissipation Factor		≤150% of maximum specified value					
		ESR		≤150% of maximum specified value					
		Leakage Current		≤100% of maximum specified value					
Surge Voltage Life		1000 cycles at 20°C with rated surge voltage applied for 30 seconds through a 1kΩ resistor and discharged for 5 minutes and 30 seconds							
		Capacitance Change		≤20% initial measured value					
		Dissipation Factor		≤150% of maximum specified value					
		ESR		≤150% of maximum specified value					
		Leakage Current		≤100% of maximum specified value					
Damp Heat Test		1000 hours at 60°C and 90 to 95% RH with no voltage applied							
		Capacitance Change		≤20% initial measured value					
		Dissipation Factor		≤150% of maximum specified value					
		ESR		≤150% of maximum specified value					
		Leakage Current		≤100% of maximum specified value					
Ripple Current Multipliers		Frequency (Hz)							
		120 Hz≤f<1kHz		1 kHz≤f<10 kHz		10 kHz≤f<100kHz		100 kHz≤f<500kHz	
		0.05		0.3		0.7		1.0	

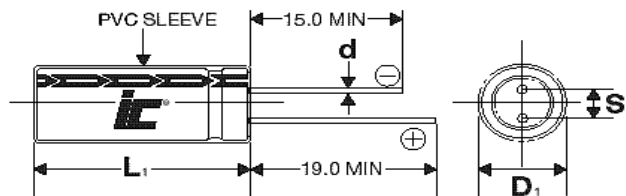

DxL	6.3x8	8x8	8x11.5	10x12.5
S	2.5	3.5	3.5	3.0
d	0.6	0.6	0.6	0.6

L₁=L+1.0 mm Max. (D≤8mm)
L₁=L+1.5 mm Max. (D>8mm)
D₁=D+0.5mm Max.
S₁=S+0.5 mm

ILLINOIS CAPACITOR

Your Global Source for World-Class Capacitors

©2013 Illinois Capacitor, Inc.

North America

Tel: 847.675.1760

sales@illcap.com

Asia

Tel: 852.2793 0931

sales@illcap.com.hk

ULG

+105°C Standard Low ESR

Capacitance (μ F)	WVDC	IC PART NUMBER	Maximum ESR (Ω) 120 Hz, +20°C	Maximum ESR (m Ω) 100 kHz, +20°C	Leakage Current (μ A)	Maximum RMS Ripple Current (mA) 100 kHz, +105°C	Dims DxL (mm)
22	25	226ULG025MEF	9.04	55	280	1700	6.3x8
33	20	336ULG020MEF	6.03	45	280	1880	6.3x8
33	25	336ULG025MFF	6.03	50	280	1870	8x8
47	20	476ULG020MFF	4.23	42	280	1952	8x8
47	25	476ULG025MFF	4.23	45	280	1940	8x8
47	35	476ULG035MFF	4.23	90	329	1500	8x6
100	20	107ULG020MFH	1.99	34	400	2670	8x11.5
100	25	107ULG025MFH	1.99	40	500	2500	8x11.5
100	35	107ULG035MGU	1.99	65	700	1870	10x12.5
150	20	157ULG020MGU	1.33	35	600	2672	10x12.5
180	16	187ULG016MFH	1.11	16	576	4360	8x11.5
220	25	227ULG025MGU	0.9	35	1100	3100	10x12.5
220	35	227ULG035MGU	0.9	55	1540	2450	10x12.5
330	16	337ULG016MGU	0.6	14	1056	5050	10x12.5
330	35	337ULG035MGU	0.6	45	2310	2700	10x12.5