


LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
CE	16		G	REVISE PER 0A40-0121-05	14MAR05	JWD

1. DIMENSIONS IN [] ARE IN INCHES.
2. MAXIMUM INSERTION LOSS IS 0.5 dB PLUS CABLE ATTENUATION OF 0.7dB/km AT 1310nm. (SEE TABLE)
3. 55 dB MIN RETURN LOSS.

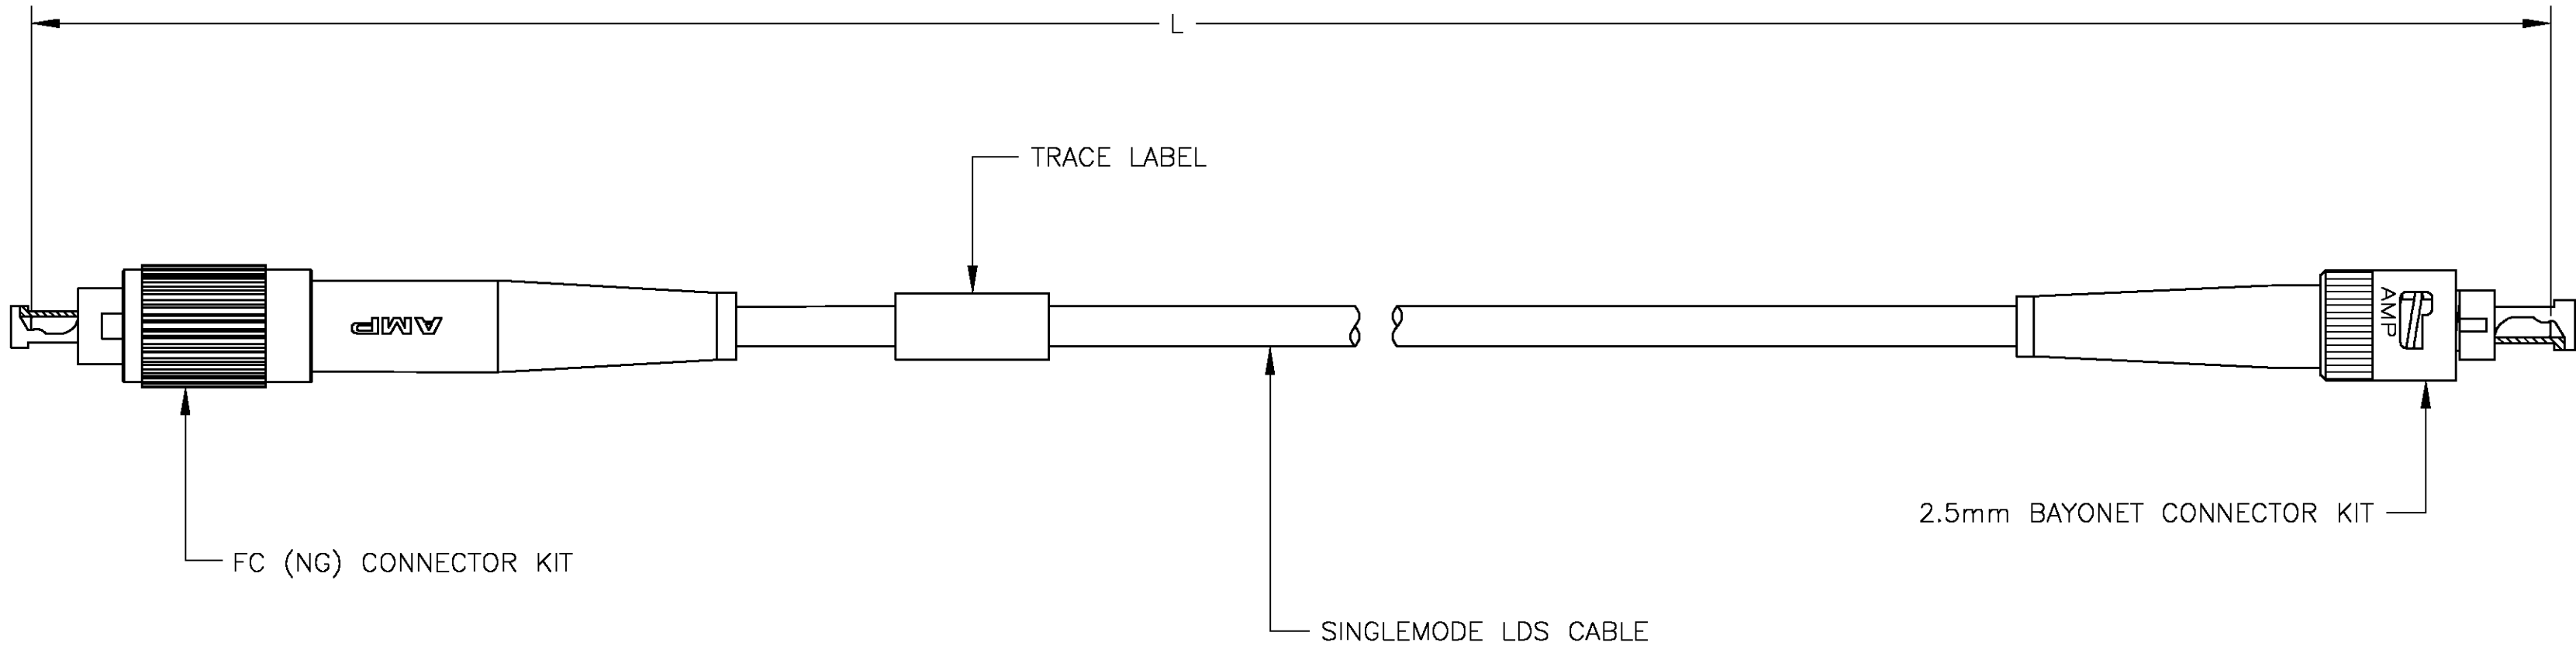

0.50	4.00±0.08	[157.5±3.0]	1-492018-2
0.50	6±0.08	[236±3]	1-492018-1
0.50	8±0.15	[315±6]	1-492018-0
0.52	30±0.3	[1181.1±12]	492018-9
0.52	25±0.3	[984±12]	492018-8
0.51	20±0.3	[787±12]	492018-7
0.51	15±0.15	[591±6]	492018-6
0.51	10±0.15	[394±6]	492018-5
0.50	5±0.08	[197±3]	492018-4
0.50	3±0.05	[118±2]	492018-3
0.50	2±0.05	[79±2]	492018-2
0.50	1±0.05	[39±2]	492018-1

MAX IL (dB)	L	PART NUMBER
2		

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
METERS [INCHES]

MATERIAL
-

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± -

1 PLC ± -

2 PLC ± -

3 PLC ± -

4 PLC ± -

ANGLES ± -

FINISH -

DWN
S.URICH
11NOV98

CHK
R.PAUL
25JUN98

APVD
N.MILLER
25JUN98

PRODUCT SPEC
-

APPLICATION SPEC
-

WEIGHT
-

Tyco Electronics Corporation
Harrisburg, Pa 17105-3608

NAME
CABLE ASSEMBLY, FIBER OPTIC, SINGLEMODE LDS,
FC (NG) TO 2.5mm BAYONET, OPTIMATE

SIZE
A2

CAGE CODE
00779

DRAWING NO
C-492018

RESTRICTED TO
-

CUSTOMER DRAWING

SCALE
NTS

SHEET
1

OF
1

REV
G