

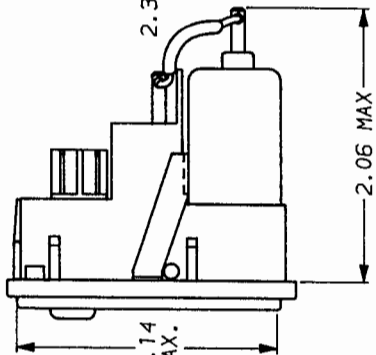
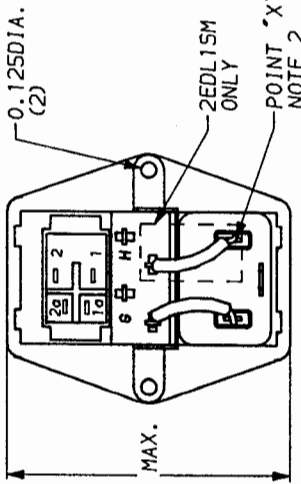
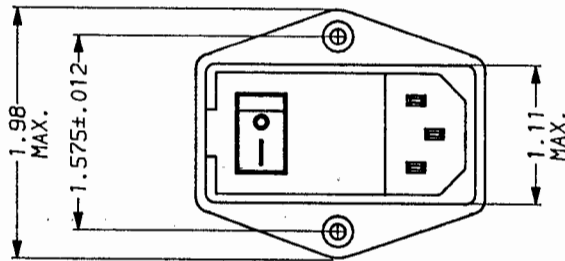


RECOMMENDED PANEL CUTOUT (NOT TO SCALE)

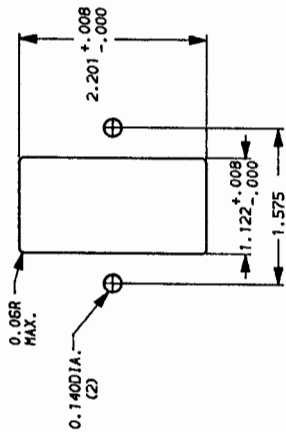

ALTERNATE SWITCH

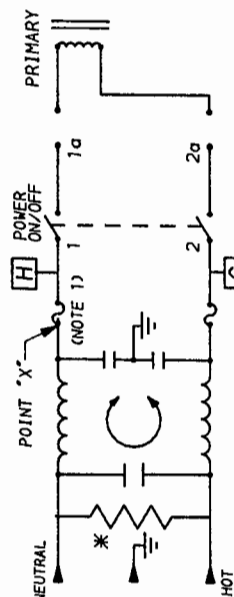

- NOTE:
- 1.) PROVISION FOR DUAL EUROPEAN STYLE FUSING.
 - 2.) 2EDL15 JUMPER FROM POINT X TO 1 AND FROM G TO 2. 2EDL15CM JUMPER FROM H TO 1 AND FROM G TO 2.

*RESISTOR ADDED TO PRODUCT BUILT AFTER 3-30-92 (9212).

SAFETY ORGANIZATION(S).

THIS FILTER HAS BEEN FORMALLY RECOGNIZED, CERTIFIED OR APPROVED BY THE LISTED AGENCY. THEREFORE, ALL TEST/REQUIREMENTS SPECIFIED IN THE LATEST REVISION OF THE FOLLOWING AGENCY STANDARDS HAVE BEEN MET.

UL 1283
CSA 22.2, NO.0,0,4,8
VDE 565-3, 625
SEN 432901
SEV 1055/TP1977/5.1.1

OPERATING SPECIFICATIONS:

LINE VOLTAGE/CURRENT:

LINE FREQUENCY:

MAX. LEAKAGE CURRENT, EACH LINE TO GROUND

OPERATING AMBIENT TEMP. RANGE:

IN AN AMBIENT, I_a , HIGHER THAN 40°C, THE MAXIMUM OPERATING CURRENT, I_o , IS AS FOLLOWS:

RELIABILITY SPECIFICATIONS:

STORAGE TEMPERATURE:

HUMIDITY:

CURRENT OVERLOAD TEST:

TEST SPECIFICATIONS:

INDUCTANCE:

CAPACITANCE, (MEASURED @ 1 KHz, 0.25 VAC MAX., 25°C ±1°C)

LINE TO GROUND:

LINE TO LINE:

DISCHARGE RESISTOR:

LINE/GROUND AND LINE/LINE

INSULATION RESISTANCE

(W/O DISCHARGE RESISTOR)

RECOMMENDED RECEIVING INSPECTION HIPOIL:

LINES TO GROUND:

LINE TO LINE:

FILTER APPROVAL:

THE BEST WAY TO SELECT AND QUALIFY A FILTER IS FOR YOUR ENGINEERING TO TEST THE UNIT IN YOUR EQUIPMENT.

C. Westby 4-30-92
APPROVED BY DATE: REV



LIBERTYVILLE, IL 60048

POWER LINE FILTER

DATE: 3-4-87
SCALE: NTS
REV: 6
LJD
CFW
2EDL15 & 2EDL1SM

18-0001-000

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[4EDL1SCM](#) [4EDL1SC](#) [4EDL4CM](#) [4EDL1S](#) [4EDL4](#) [4EDL4M](#) [4EDL4C](#) [2EDL1S](#) [4EDL1SM](#)