

Professionally approved products.

Datasheet

SPDT PCB ON-(ON) Push Button Switch

RS Stock number 734-6782

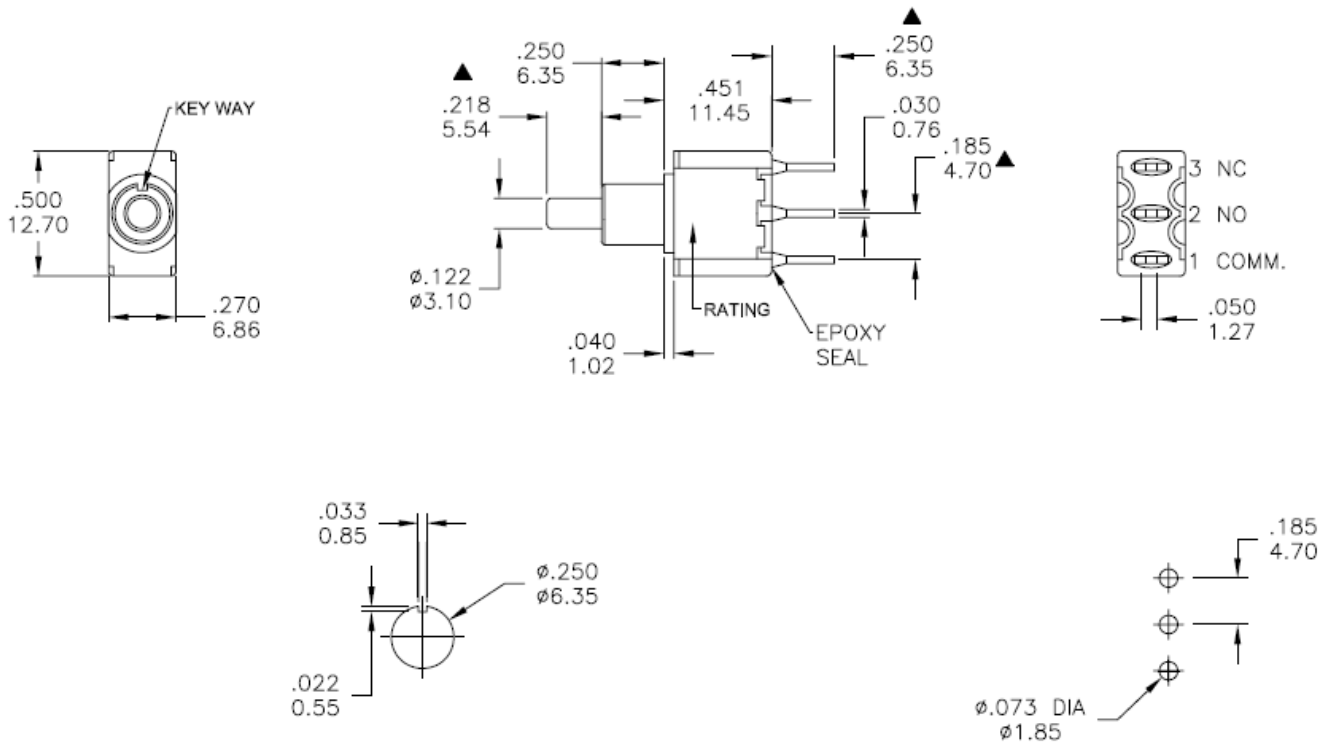


Specifications:





Mechanical Life:	5,000 make-and-break cycles
Contact Resistance:	20m Ω max. Initial @ 2-4V DC, 100mA for both silver and gold plated
Insulation Resistance:	1,000M Ω min.
Dielectric Strength:	1,000Vrms @ sea level
Operating Temperature:	-30°C to 85°C
Case:	Diallyl phthalate (DAP) (UL94V-0)
Plunger:	Brass, nickel plated
Bushing:	Brass, nickel plated
Housing:	Stainless Steel
Terminal/Contact:	Silver or gold plated
RoHS:	2002/95/EC

Professionally approved products. **Datasheet**

Dimensions – inch
mm



PANEL MOUNTING

Model No.	POS.1	POS.2
		
7MS7	ON	MOM
Term. Comm.	1-3	1-2
SCHEMATIC		

SWITCH FUNCTION