


MICRO SWITCH

FREEPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

ASSEMBLY PUSHBUTTON SWITCH

CATALOG LISTING

4PB220-T2

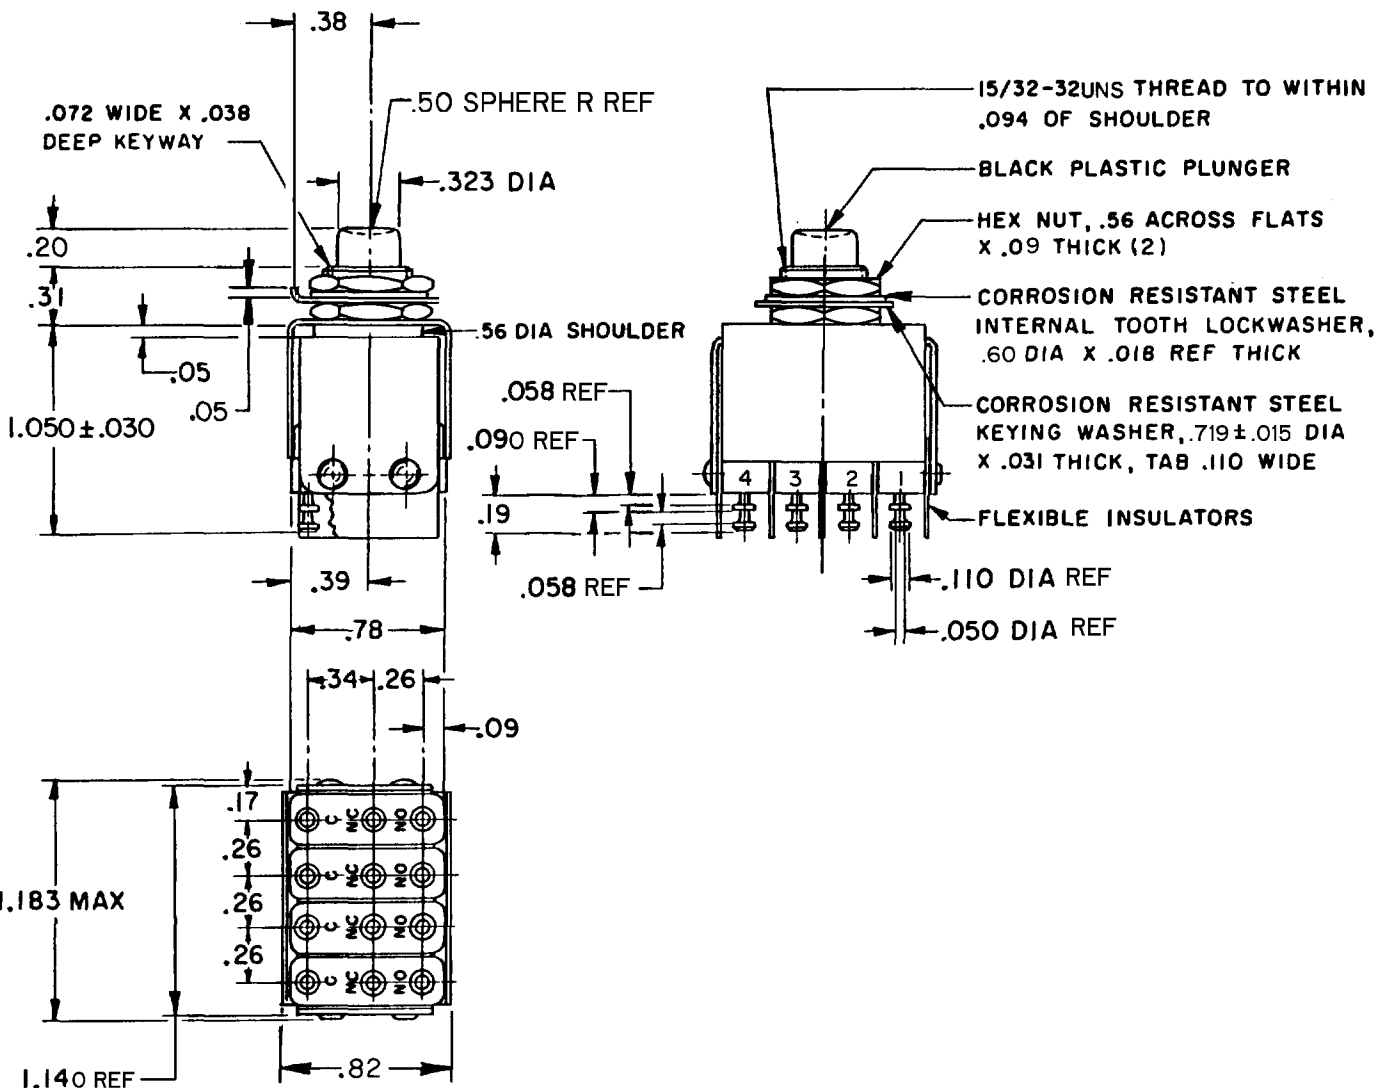


NOTES

- 1- UNIT INCLUDES "IISM" TYPE BASIC SWITCH (4)
- 2- TERMINALS ARE PLATED FOR SOLDERING
- 3- SWITCHES DO NOT NECESSARILY OPERATE SIMULTANEOUSLY

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE --- 35 OZ APPROX
TOTAL TRAVEL --- .100 APPROX

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T (4)

250 VAC ----- 5 AMP
30 VOLTS DC RATING

INDUCTIVE ----- SEA LEVEL - 3 AMP
50,000 FT - 2.5 AMP
RESISTIVE ----- SEA LEVEL - 5 AMP
50,000 FT - 5 AMP
MAXIMUM INRUSH ----- 24 AMP

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE ±

DIM. mm	TOL. mm/in	DIM. in	TOL. mm/in
NO PLACES	X	1/64	
ONE PLACE	X, X	0.4/0.16	X, X 0.8/0.3
TWO PLACES	X, XX	0.15/0.06	X, XX 0.38/0.15
THREE PLACES	X, XXX		X, XXX 0.13/0.05
ANGLES			

DESIGN UNITS
SI METRIC ☐

US CUSTOMARY ☒

WEIGHT

4PB220-T2

M

DRAWING
NUMBER

5

ISSUE

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

19

20

21

22

23

24

25

26

27

28

29

PAGE 1 OF 1

REPLACES

RELEASE NO. PR-6566

CHECK

28 OCT 98

J A L

28 OCT 98

J A F

28 OCT 98

C E B

28 OCT 98

C E B

28 OCT 98

C E B

28 OCT 98

C E B

28 OCT 98

C E B

28 OCT 98

C E B

FORMTEK
FO-52848-A
DRAWN

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Honeywell:](#)

[4PB220-T2](#)