



MICRO SWITCH
FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

ASSEMBLY- PUSHBUTTON SWITCH

CATALOG LISTING
4PB364-T

4PB364-T

M

DRAWING
NUMBER

2

X

ISSUE
3

REPLACES

RELEASE NO. SR-10885

CHECK

REVISIONS

A CO18544
VDF
18 OCT 63
B CO19800
MRF
14 JAN 65

CHECK

KAC

CHECK

27 MAR 63

CHECK

DAW

CHECK

27 MAR 63


CHECK

RE R

26 MAR 63

CHECK

FO-30378

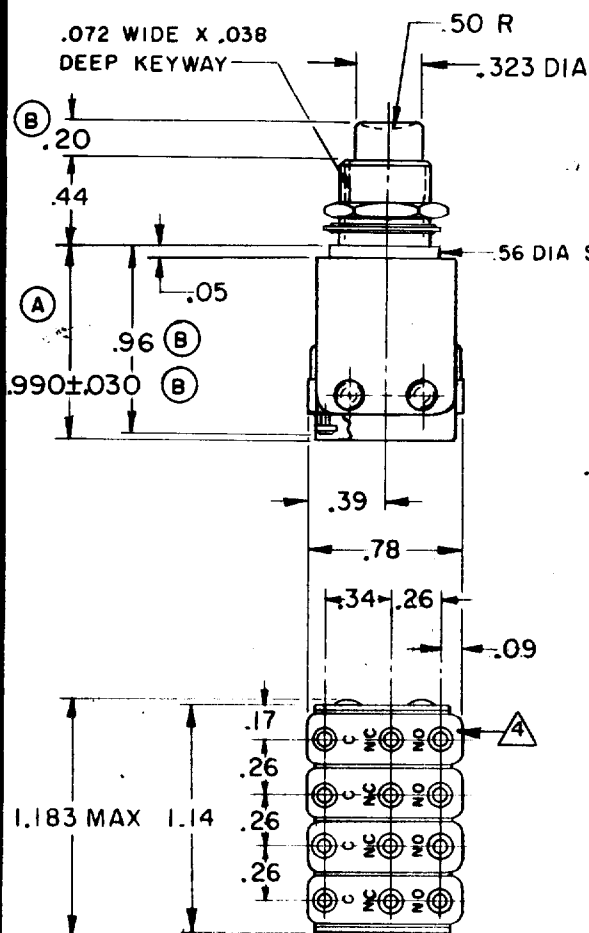

NOTE -

- 1-(3)"IISM" TYPE BASICS WITH SILVER CONTACTS AND
(1) "IISM" TYPE WITH GOLD CONTACTS
- 2-SWITCHES DO NOT NECESSARILY OPERATE SIMULTANEOUSLY
- 3-TERMINALS ARE PLATED FOR SOLDERING
- 4 IISM TYPE BASIC SWITCH WITH 24 K SOLID GOLD CONTACTS
IS IDENTIFIED BY YELLOW SPOT ON BOTTOM OF SWITCH
- 5-UNIT WILL OPERATE SATISFACTORILY IN TEMPERATURES FROM
MINUS 85°F TO PLUS 310°F

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE--35 OZ APPROX

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T (4)

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE
NOTED

DIMENSIONS ARE IN INCHES
TOLERANCES ARE:
ONE PLACE (.0) ±.030
TWO PLACE (.00) ±.015
THREE PLACE (.000) ±.005
ANGLES ±

WEIGHT

SILVER CONTACT RATING

250 VAC ----- 5 AMP

30 VOLTS DC RATING

INDUCTIVE ----- SEA LEVEL ----- 3 AMP

50,000 FT ----- 2.5 AMP

RESISTIVE ----- SEA LEVEL ----- 5 AMP

50,000 FT ----- 5 AMP

MAXIMUM INRUSH ----- 24 AMP

GOLD CONTACT RATING

1/2 AMP

1/2 AMP

1 AMP

1 AMP

2 AMP

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Honeywell:](#)

[4PB364-T](#)