
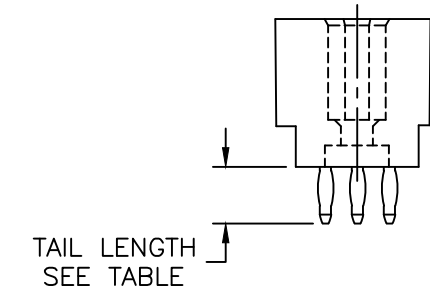
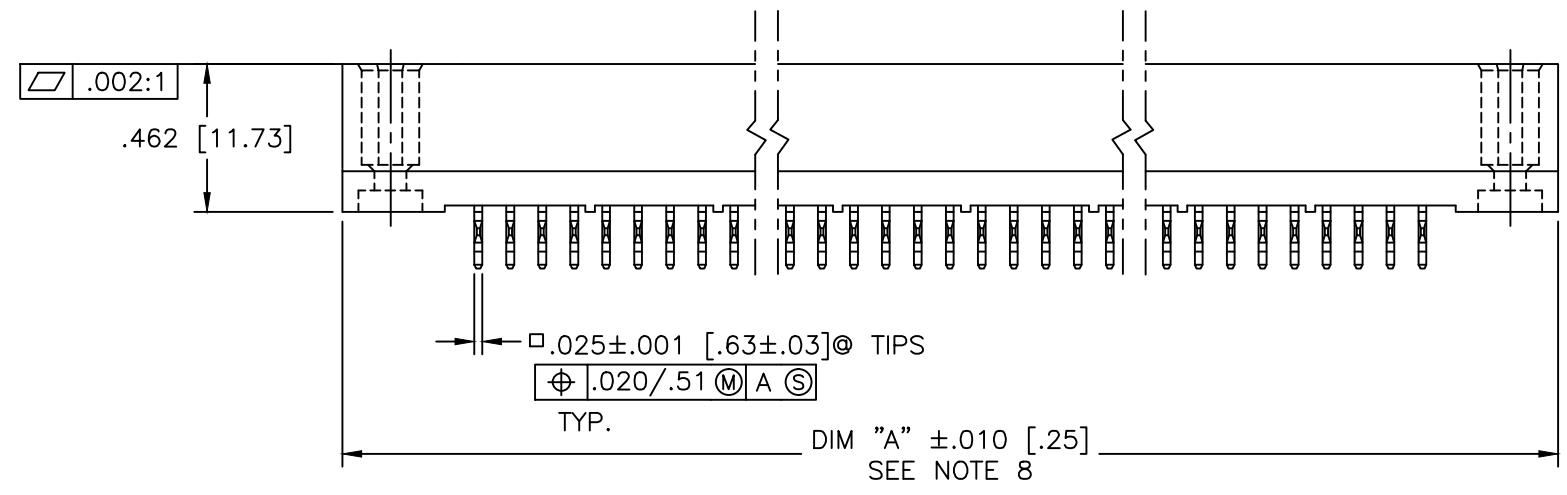


PRODUCT NUMBER
SEE TABLE

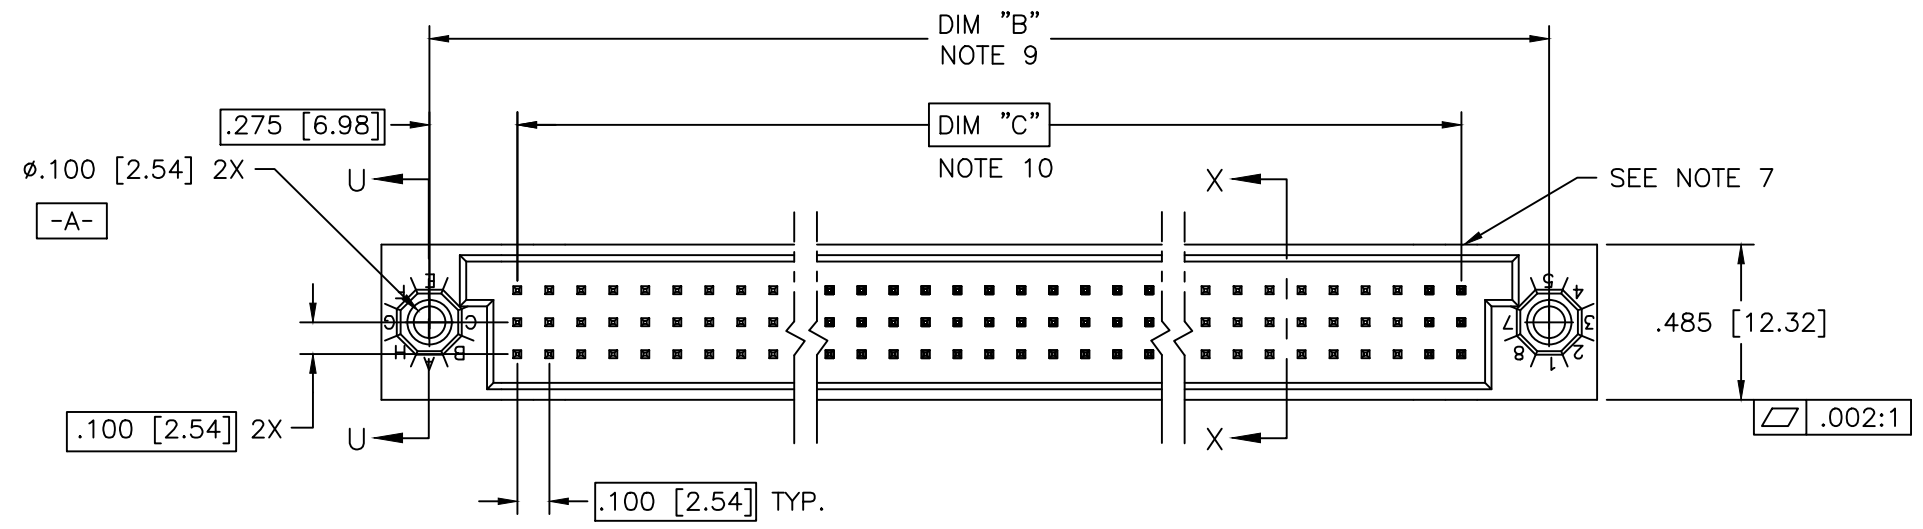

mat'l. code SEE NOTE 3				surface ISO 1302 ✓				tolerance ISO 406 ISO 1101		projection 			product family HPC											
ltr	ecn no	dr	date	tolerances unless otherwise specified											title 3 ROW VERTICAL HEADER W/PRESS-FIT PINS, 0 G.P.									
P	I11-0094	SAL	2011-05-23	angles	linear	.XX±.01/.3																		
-	-	-	-			.XXX±.005/.13																		
J	V05-0514	TAB	8/2/05	0°±2'		.XXXX±.0020/.05							scale 1:1											
K	V05-0999	DAI	10/28/05	dr	D.SHEAFER		1991-03-14					dwg no sheet 1 of 16					size A3							
L	V05-1039	DAI	11/11/05	engr	S.CLARK		1991-03-14																	
M	M06-0283	MHT	7/27/06	chr	S. ALOSIUS		2011-05-23																	
N	M06-0490	MHT	12/13/06	appd	BIJU K PAUL		2011-05-23																	
sheet		revision		P	P	P	P	P	P	P	P	P	P	P	P	P	P	P	P	P	P			
index		sheet		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16					

form: A3

PRODUCT NUMBER
SEE TABLE

SECTION U-U

SECTION X-X

RECOMMENDED PCB LAYOUT
(ALL HOLES LOCATED ON .100/2.54 GRID
UNLESS OTHERWISE SPECIFIED)

NOTES:

- PRODUCT NUMBERING CODE:
50006 - X YYY Z LF
LEAD FREE (OPTIONAL)
TAIL LENGTH SEE TABLE
NO. OF POSITIONS SEE NOTE 2
PLATING SEE TABLE
BASE NUMBER

PRODUCT NUMBERING CODE FOR
SELECT LOAD PART NUMBERS:
50006 - XX YYY LF
LEAD FREE (OPTIONAL)
SEQUENCE NUMBER
ALWAYS 'XX'
BASE NUMBER
- THIS PRODUCT IS CONFIGURED IN SIZES OF 6 thru 80
COLUMNS IN INCREMENTS OF ONE.
i.e.: 6,7,8,9,.....79,80.
- HOUSING MATERIAL: GLASS AND MINERAL FILLED
HIGH TEMP. THERMOPLASTIC. FLAME RETARDANT PER
UL94V-0. COLOR: BLACK.
PIN MATERIAL: PHOS BRONZE
- CONTACT PLATING OPTIONS:
SEE PRODUCT NUMBER TABLE
- $\phi .0453/1.151$ DRILLED HOLE PLATED WITH $.0003/.007$ MIN.
SnPb OVER $.001/.03$ to $.003/.08$ Cu. PLATING TO ACHIEVE
A $\phi .040 \pm .003/1.02 \pm .08$ HOLE.
- TO ASSURE PROPER INSTALLATION: TOOLING, AS
SPECIFIED IN INSTRUCTION MANUAL 155915-001 MUST
BE USED. PIN MATING LENGTH WILL BE $\pm .002/.05$
AFTER INSTALLATION.
- COMPANY NAME, PART NUMBER AND LOT CODE TO APPEAR ON
THIS SURFACE PER BUS-12-108.
- DIM "A" CALCULATION = $.100[2.54] \times \text{NO. OF COLUMNS} + .75[19.1]$
- DIM "B" CALCULATION = $.100[2.54] \times \text{NO. OF COLUMNS} + .450[11.43]$
- DIM "C" CALCULATION = $.100[2.54] \times \text{NO. OF COLUMNS} - .100[2.54]$
- ALL POSITIONS ARE LOADED EXCEPT FOR -XXYYY ASSEMBLIES
WHICH HAVE SELECTIVE LOADING.
- REFERENCE 50807 FOR F.M.L.B. AVAILABLE OPTIONS
AND WORKSHEET.
- THIS PRODUCT (WITH 'LF' SUFFIX) MEETS EUROPEAN UNION DIRECTIVES
AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
- THIS HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE
FOR 10-30 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE
REFLOW OVEN.

mat'l. code SEE NOTE 3				surface ISO 1302	tolerance ISO 406 ISO 1101	projection	product family HPC
ltr	ecn no	dr	date	tolerances unless otherwise specified		 INCH/MM scale 1:1 	title 3 ROW VERTICAL HEADER W/PRESS-FIT PINS, 0 G.P.
P				angles	linear		dwg no
				0°±2'	.XX±.01/.3 .XXX±.005/.13 .XXXX±.0020/.051		sheet 2 of 16
				dr	D.SHEAFER	1991-03-14	size A3
				enr	S.CLARK	1991-03-14	type Product Customer Drawing
				chr	S.ALOSIOUS	2011-05-23	
				appd	BIJU K PAUL	2011-05-23	
sheet index	revision sheet						

PRODUCT NO.	NUMBER OF POSITIONS NOTE 2	TAIL LENGTH ±.015/0.38	CONTACT PLATING
50006-1YYYA	YYY	.177/4.50	30u"/.76u GOLD
50006-1YYYC	YYY	.533/13.54	30u"/.76u GOLD
50006-1YYXD	YYY	.733/18.62	30u"/.76u GOLD
50006-1YYYG	YYY	.250/6.35	30u"/.76u GOLD
50006-1YYYL	YYY	.188/4.78	30u"/.76u GOLD
50006-1YYYP	YYY	.470/11.94	30u"/.76u GOLD
50006-3YYYA	YYY	.177/4.50	50u"/1.27u GOLD
50006-3YYYC	YYY	.533/13.54	50u"/1.27u GOLD
50006-3YYXD	YYY	.733/18.62	50u"/1.27u GOLD
50006-3YYYG	YYY	.250/6.35	50u"/1.27u GOLD
50006-3YYYL	YYY	.188/4.78	50u"/1.27u GOLD
50006-3YYYP	YYY	.470/11.94	50u"/1.27u GOLD
50006-5YYYA	YYY	.177/4.50	30u"/.76u GXT
50006-5YYALF	YYY	.177/4.50	30u"/.76u GXT
50006-5YYYC	YYY	.533/13.54	30u"/.76u GXT
50006-5YYYCLF	YYY	.533/13.54	30u"/.76u GXT
50006-5YYXD	YYY	.733/18.62	30u"/.76u GXT
50006-5YYYDLF	YYY	.733/18.62	30u"/.76u GXT
50006-5YYYG	YYY	.250/6.35	30u"/.76u GXT
50006-5YYYGLF	YYY	.250/6.35	30u"/.76u GXT
50006-5YYYL	YYY	.188/4.78	30u"/.76u GXT
50006-5YYYLLF	YYY	.188/4.78	30u"/.76u GXT
50006-5YYYP	YYY	.470/11.94	30u"/.76u GXT
50006-5YYYPLF	YYY	.470/11.94	30u"/.76u GXT
50006-XX010	150	SEE SHEET 4	30u"/.76u GXT
50006-XX010LF	150	SEE SHEET 4	30u"/.76u GXT
50006-XX025	18	SEE SHEET 5	30u"/.76u GXT
50006-XX025LF	18	SEE SHEET 5	30u"/.76u GXT
50006-XX027	96	SEE SHEET 6	30u"/.76u GOLD
50006-XX027LF	96	SEE SHEET 6	30u"/.76u GXT
50006-XX028	30	SEE SHEET 7	30u"/.76u GOLD
50006-XX028LF	30	SEE SHEET 7	30u"/.76u GXT
50006-XX045	180	SEE SHEET 8	30u"/.76u GXT
50006-XX045LF	180	SEE SHEET 8	30u"/.76u GXT
50006-XX049	96	SEE SHEET 9	30u"/.76u GOLD
50006-XX049LF	96	SEE SHEET 9	30u"/.76u GXT
50006-XX053	150	SEE SHEET 10	30u"/.76u GXT
50006-XX053LF	150	SEE SHEET 10	30u"/.76u GXT
50006-XX054	150	SEE SHEET 11	30u"/.76u GOLD
50006-XX054LF	150	SEE SHEET 11	30u"/.76u GXT
50006-XX055	30	SEE SHEET 12	30u"/.76u GOLD
50006-XX055LF	30	SEE SHEET 12	30u"/.76u GXT
50006-XX056	150	SEE SHEET 13	30u"/.76u GOLD
50006-XX056LF	150	SEE SHEET 13	30u"/.76u GXT
50006-XX057	150	SEE SHEET 14	30u"/.76u GOLD
50006-XX057LF	150	SEE SHEET 14	30u"/.76u GXT
50006-XX058	240	SEE SHEET 15	50u"/1.27u GOLD
50006-XX058LF	240	SEE SHEET 15	50u"/1.27u GXT
50006-XX059	240	SEE SHEET 16	50u"/1.27u GOLD
50006-XX059LF	240	SEE SHEET 16	50u"/1.27u GXT

FCIconnect.com

Copyright FCI

D

[illegible]


[illegible][illegible]

- | ITEM KEY | QTY. | MATING LENGTH | TAIL LENGTH |
|----------|------|---------------|--------------|
| A | 136 | .200 / 5.08 | .177 / 4.50 |
| B | 12 | .200 / 5.08 | .533 / 13.54 |
| C | 2 | .240 / 6.10 | .177 / 4.50 |

1	2	3	4	5	6
---	---	---	---	---	---

PRODUCT NUMBER
50006-XX025
50006-XX025LF

FOR PRODUCT NUMBERS 50006-XX025 AND 50006-XX025LF ONLY

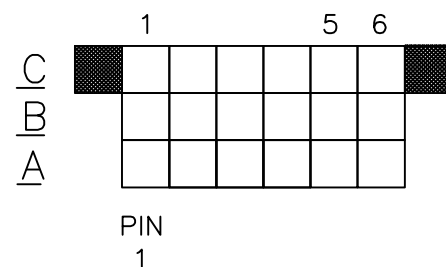

CUSTOMER NOTE: END GUIDE PINS ARE SUGGESTED IN YOUR APPLICATION TO PREVENT STUBBING OF THE .260/6.60 MATING LENGTH SIGNAL PINS.


NOTES FOR 50006-XX025 AND 50006-XX025LF ONLY:

- ALL POSITIONS ARE LOADED WITH "A" .
- COLUMN 1, ROW A IS DESIGNATED AS SIGNAL PIN 1, AS VIEWED FROM THE MATING FACE.
- SIGNAL DATA FOR 50006-XX025 AND 50006-XX025LF:
SIZE 3 x 6
TOTAL NO. OF POSITIONS - 18
NO. OF POSITIONS LOADED - 18


ITEM KEY	QTY.	MATING LENGTH	TAIL LENGTH
A	18	.260 / 6.60	.533 / 13.54

mat'l. code				surface ISO 1302	tolerance ISO 406 ISO 1101	projection	product family HPC
ltr	ecn no	dr	date	tolerances unless otherwise specified		 INCH/MM	title 3 ROW VERTICAL HEADER W/PRESS-FIT PINS, 0 G.P. dwg no 50006 sheet 5 of 16 size A3 type Product Customer Drawing
P				angles	linear		
				0°±2°			
				dr	D.SHEAFER	1991-03-14	
				enr	S.CLARK	1991-03-14	
				chr	S ALOSIOUS	2011-05-23	
				appd	BIJU K PAUL	2011-05-23	
sheet index	revision sheet						


PRODUCT NUMBER
50006-XX027
50006-XX027LF



L.E.





R.E.



SEC B-B

NOTE 2

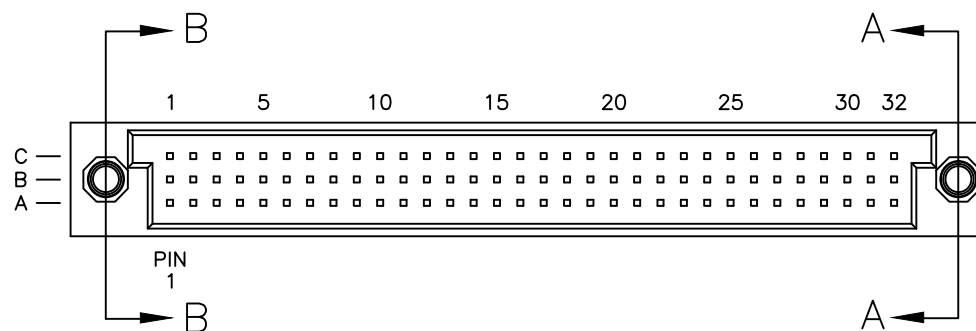

SEC A-A

FOR PRODUCT NUMBERS 50006-XX027 AND 50006-XX027LF


NOTES:

1. IDENTICAL TO P/N 50006-1096A EXCEPT AS SHOWN W/JACK SCREW INSERTS INSTALLED ON BOTH ENDS.
2. HARDWARE P/N 95729-001.


mat'l. code				surface ISO 1302	tolerance ISO 406 ISO 1101	projection 	product family HPC			
ltr	ecn no	dr	date	tolerances unless otherwise specified		INCH/MM scale 1:1 	title 3 ROW VERTICAL HEADER W/PRESS-FIT PINS, 0 G.P.			
P				angles	linear		dwg no 50006			
				0°±2°						
				dr	D.SHEAFER					
				enr	S.CLARK	1991-03-14	sheet 6 of 16 size A3			
				chr	S.ALOSIOUS					
				appd	BIJU K PAUL					
sheet index	revision sheet						type Product Customer Drawing			

form: A3

PRODUCT NUMBER
50006-XX028
50006-XX028LF

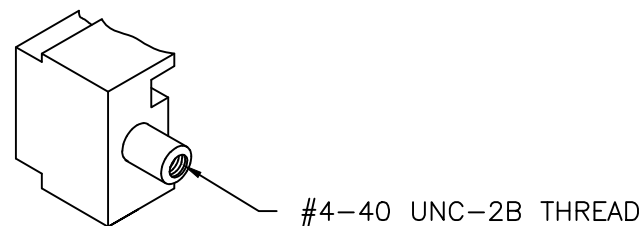


L.E.





R.E.

0.195 [4.94]
REF



SEC B-B

NOTE 2

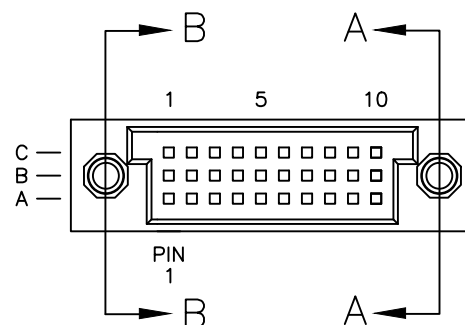

SEC A-A

FOR PRODUCT NUMBERS 50006-XX028 AND 50006-XX028LF

NOTES:

1. IDENTICAL TO P/N 50006-1030A EXCEPT AS SHOWN W/JACK SCREW INSERTS INSTALLED ON BOTH ENDS.
2. HARDWARE P/N 95729-001.

mat'l. code				surface ISO 1302	✓	tolerance ISO 406 ISO 1101	projection 	product family HPC			
ltr	ecn no	dr	date	tolerances unless otherwise specified			INCH/MM scale 1:1 	title 3 ROW VERTICAL HEADER W/PRESS-FIT PINS, 0 G.P.			
P				angles	linear	.XX±.01/.3		dwg no 50006			
						.XXX±.005/.13					
				0°±2°		.XXX±.0020/.051					
				dr	D.SHEAFER	1991-03-14	FCI	sheet 7 of 16			
				enr	S.CLARK	1991-03-14		A3			
				chr	S.ALOSIOUS	2011-05-23					
				appd	BIJU K PAUL	2011-05-23		type Product Customer Drawing			
sheet index	revision sheet										

form: A3


PRODUCT NUMBER
50006-XX045
50006-XX045LF

FOR PRODUCT NUMBERS 50006-XX045 AND 50006-XX045LF ONLY

	1	5	10	15	20	25	30	
C								
B								
A								
	PIN 1							
	31	35	40	45	50	55	60	

- NOTES FOR 50006-XX045 AND 50006-XX045LF ONLY:
- ALL POSITIONS ARE LOADED WITH "A".
 - COLUMN 1, ROW A IS DESIGNATED AS SIGNAL PIN 1, AS VIEWED FROM THE MATING FACE.
 - SIGNAL DATA FOR 50006-XX045 AND 50006-XX045LF:
 SIZE 3 x 60
 TOTAL NO. OF POSITIONS - 180
 NO. OF POSITIONS LOADED - 180

ITEM KEY	QTY.	MATING LENGTH	TAIL LENGTH
A	180	.220 - 5.59	.597 - 15.16

mat'l. code				surface ISO 1302	tolerance ISO 406 ISO 1101	projection	product family HPC			
ltr	ecn	no	dr	date	tolerances unless otherwise specified	 INCH/MM scale 1:1 	title 3 ROW VERTICAL HEADER W/PRESS-FIT PINS, 0 G.P.			
P					angles linear .XX±.01/.3		dwg no			
					0°±2° .XXX±.005/.13		sheet 8 of 16			
					.XXX±.0020/.051		size			
				dr	D.SHEAFER	1991-03-14				
				enr	S.CLARK	1991-03-14				
				chr	S ALOSIOUS	2011-05-23				
				appd	BIJU K PAUL	2011-05-23				
sheet index	revision sheet						type Product Customer Drawing			

PRODUCT NUMBER
50006-XX049
50006-XX049LF

FOR PRODUCT NUMBER 50006-XX049 AND 50006-XX049LF ONLY

	1		5		10		15		20		25		30	32	
C	B		B		B		B		B		B		B	B	C
B	B		B		B		B		B		B		B	B	
A	B		B		B		B		B		B		B	B	

PIN
1

CUSTOMER NOTE: END GUIDE PINS ARE SUGGESTED IN YOUR APPLICATION TO
PREVENT STUBBING OF THE .260/6.60 MATING LENGTH SIGNAL PINS.

NOTES FOR 50006-XX049 AND 50006-XX049LF ONLY:

- ALL POSITIONS ARE LOADED WITH "A" EXCEPT AS SHOWN.
- COLUMN 1, ROW A IS DESIGNATED AS SIGNAL PIN 1, AS VIEWED FROM THE MATING FACE.
- SIGNAL DATA FOR 50006-XX049 AND 50006-XX049LF:
SIZE 3 x 32
TOTAL NO. OF POSITIONS - 96
NO. OF POSITIONS LOADED - 96

ITEM KEY	QTY.	MATING LENGTH	TAIL LENGTH
A	62	.220 / 5.59	.177 / 4.50
B	33	.260 / 6.60	.177 / 4.50
C	1	.180 / 4.57	.177 / 4.50

mat'l. code				surface ISO 1302	tolerance ISO 406 ISO 1101	projection	product family HPC
ltr	ecn no	dr	date	tolerances unless otherwise specified		 INCH/MM scale 1:1	title
P				angles	.XX±.01/.3		3 ROW VERTICAL HEADER
				linear	.XXX±.005/.13		W/PRESS-FIT PINS, 0 G.P.
				0°±2°	.XXXX±.0020/.051		dwg no
				dr	D.SHEAFER 1991-03-14		sheet 9 of 16 size
				enr	S.CLARK 1991-03-14		50006 A3
				chr	S ALOSIOUS 2011-05-23		
				appd	BIJU K PAUL 2011-05-23		type Product Customer Drawing
sheet index	revision sheet						

form: A3

PRODUCT NUMBER
50006-XX053
50006-XX053LF

FOR PRODUCT NUMBERS 50006-XX053 AND 50006-XX053LF ONLY

	1			5					10						15					20						25
C				C																						
B				C	C	B																C	C			
A																										
PIN 1																										
	26				30					35					40					45				C	C	C
																								C	C	

CUSTOMER NOTE: END GUIDE PINS ARE SUGGESTED IN YOUR APPLICATION TO PREVENT STUBBING OF THE .260 MATING LENGTH SIGNAL PINS.

- ALL POSITIONS ARE LOADED WITH "A" EXCEPT AS SHOWN.
- COLUMN 1, ROW A IS DESIGNATED AS SIGNAL PIN 1, AS VIEWED FROM THE MATING FACE.
- SIGNAL DATA FOR 50006-XX053 AND 50006-XX053LF:
 SIZE 3 x 50
 TOTAL NO. OF POSITIONS – 150
 NO. OF POSITIONS LOADED – 150

ITEM KEY	QTY.	MATING LENGTH	TAIL LENGTH
A	139	.220 / 5.59	.250 / 6.35
B	1	.180 / 4.57	.250 / 6.35
C	10	.260 / 6.60	.250 / 6.35

mat'l. code				surface ISO 1302	tolerance ISO 406 ISO 1101	projection	product family
ltr	ecn	no	dr	date	tolerances unless otherwise specified	INCH/MM	HPC
P					angles linear .XX±.01/.3		title
					0°±2° .XXX±.005/.13		3 ROW VERTICAL HEADER
					.XXXX±.0020/.051	scale 1:1	W/PRESS-FIT PINS, 0 G.P.
			dr	D.SHEAFER	1991-03-14	FCJ	dwg no
			enr	S.CLARK	1991-03-14		sheet10 of 16
			chr	S ALOSIOUS	2011-05-23		size
			appd	BIJU K PAUL	2011-05-23		A3
sheet index	revision sheet						type
							Product Customer Drawing

Diagram illustrating a 50-column grid with 3 rows. The columns are numbered 1 to 50. The first row has a black square at column 1. The second row has 'C' at column 4, 'C' at column 5, 'B' at column 6, and 'C' at column 48. The third row has 'C' at column 49. The grid is divided into sections by vertical lines at columns 1, 5, 10, 15, 20, and 25.


B	CUSTOMER NOTE: END GUIDE PINS ARE SUGGESTED IN YOUR APPLICATION TO	B
---	--	---

Copyright FCI  FCIconnect.com


- | | | |
|---|-------------------------------|---|
| C | NO. OF POSITIONS LOADED - 150 | C |
|---|-------------------------------|---|

[illegible]




PRODUCT NUMBER
50006-XX055
50006-XX055LF

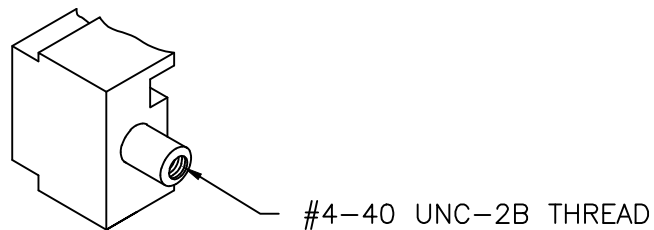

L.E.



R.E.

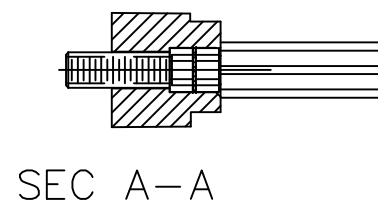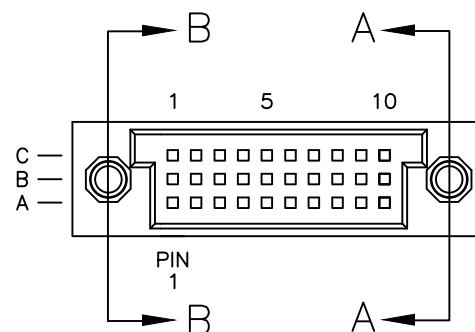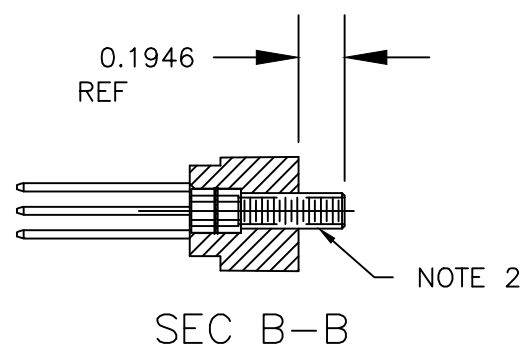

FOR PRODUCT NUMBERS 50006-XX055 AND 50006-XX055LF

NOTES:


1. IDENTICAL TO P/N 50006-1030D EXCEPT AS SHOWN W/JACK SCREW INSERTS INSTALLED ON BOTH ENDS.
2. HARDWARE P/N 95729-001.

mat'l. code				surface ISO 1302	tolerance ISO 406 ISO 1101	projection 	product family HPC			
ltr	ecn no	dr	date	tolerances unless otherwise specified		INCH/MM scale 1:1 	title 3 ROW VERTICAL HEADER W/PRESS-FIT PINS, 0 G.P.			
P				angles	linear		dwg no 50006 type Product Customer Drawing			
				0°±2°						
				dr	D.SHEAFER					
				enr	S.CLARK		sheet12 of 16size A3			
				chr	S ALOSIOUS					
				appd	BIJU K PAUL					
sheet index	revision sheet									

form: A3

PRODUCT NUMBER
50006-XX056
50006-XX056LF

FOR PRODUCT NUMBER 50006-XX056 AND 50006-XX056LF ONLY

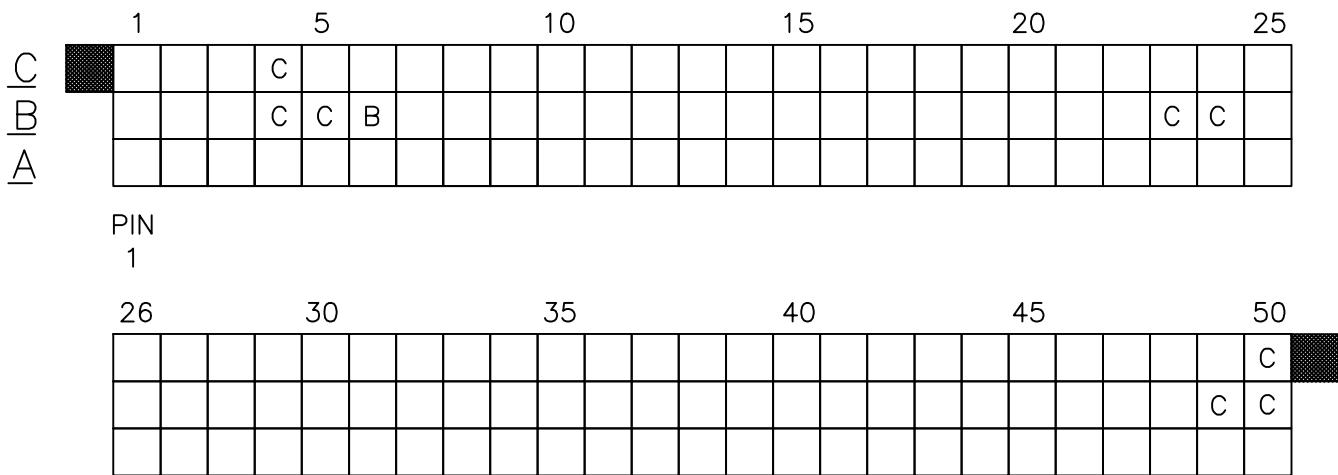

CUSTOMER NOTE: END GUIDE PINS ARE SUGGESTED IN YOUR APPLICATION TO PREVENT STUBBING OF THE .260 MATING LENGTH SIGNAL PINS.

- NOTES FOR 50006-XX056 AND 50006-XX056LF ONLY:
- ALL POSITIONS ARE LOADED WITH "A" EXCEPT AS SHOWN.
 - COLUMN 1, ROW A IS DESIGNATED AS SIGNAL PIN 1, AS VIEWED FROM THE MATING FACE.
 - SIGNAL DATA FOR 50006-XX056 AND 50006-XX056LF:
 SIZE 3 x 50
 TOTAL NO. OF POSITIONS - 150
 NO. OF POSITIONS LOADED - 150

ITEM KEY	QTY.	MATING LENGTH	TAIL LENGTH
A	141	.220 / 5.59	.177 / 4.50
B	1	.180 / 4.57	.177 / 4.50
C	8	.260 / 6.60	.177 / 4.50

mat'l. code				surface ISO 1302	tolerance ISO 406 ISO 1101	projection	product family HPC
ltr	ecn no	dr	date	tolerances unless otherwise specified		 INCH/MM	title
P				angles	.XX±.01/.3		3 ROW VERTICAL HEADER W/PRESS-FIT PINS, 0 G.P.
				linear	.XXX±.005/.13		
				0°±2°	.XXXX±.0020/.051		
				dr	D.SHEAFER	1991-03-14	dwg no
				enr	S.CLARK	1991-03-14	sheet13 of 16
				chr	S ALOSIOUS	2011-05-23	size
				appd	BIJU K PAUL	2011-05-23	A3
sheet index	revision sheet						type
							Product Customer Drawing

[illegible]

1

CUSTOMER NOTE: END GUIDE PINS ARE SUGGESTED IN YOUR APPLICATION TO PREVENT STUBBING OF THE .260 MATING LENGTH SIGNAL PINS.

ITEM KEY	QTY.	MATING LENGTH	TAIL LENGTH
A	101	.220 / 5.59	.561 / 14.25
B	1	.180 / 4.57	.521 / 13.23
C	8	.260 / 6.60	.601 / 15.27
D	40	.220 / 5.59	.177 / 4.50

form: A3 1 2 3 4 5 6

[illegible][illegible]

A	PIN	A
---	-----	---

B		B
---	--	---

3. SIGNAL DATA FOR 50000-XX058 AND 50000-XX058LF.

[illegible]

[illegible][illegible]

A	PIN	A
1	1	1

[illegible]

3. SIGNAL DATA FOR 50006-XX059 AND 50006-XX059LF: SIZE 3 x 80	C
--	---

- | | | | | |
|-------------|---------|----------------------|------------|----------------|
| mat'l. code | surface | tolerance
ISO 406 | projection | product family |
|-------------|---------|----------------------|------------|----------------|

[illegible]

form: A3	1	2	3	4	5	6
----------	---	---	---	---	---	---

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

FCI / Amphenol:

[50006-5081CLF](#) [50006-XX010LF](#) [50006-XX028LF](#) [50006-XX053LF](#) [50006-XX056LF](#) [50006-XX057LF](#) [50006-5120CLF](#) [50006-1018A](#) [50006-1030A](#) [50006-1069A](#) [50006-1195G](#) [50006-5018A](#) [50006-5069A](#) [50006-5081C](#) [50006-5096A](#) [50006-5201A](#) [50006-5210G](#) [50006-XX054](#) [50006-XX056](#) [50006-XX057](#) [50006-1096D](#) [50006-5030ALF](#) [50006-5096C](#) [50006-5096DLF](#) [50006-1027A](#) [50006-1048G](#) [50006-1054A](#) [50006-1054G](#) [50006-1057A](#) [50006-1075G](#) [50006-1096A](#) [50006-1096G](#) [50006-1105G](#) [50006-1120A](#) [50006-1135G](#) [50006-1180G](#) [50006-1195A](#) [50006-1225G](#) [50006-1240D](#) [50006-5030A](#) [50006-5054A](#) [50006-5060A](#) [50006-5075D](#) [50006-5096D](#) [50006-5120C](#) [50006-5165G](#) [50006-5180C](#) [50006-5210A](#) [50006-5225D](#) [50006-XX055](#) [50006-XX058LF](#) [50006-XX059LF](#)