

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0436500629

Status:

Active

Overview:

Micro-Fit 3.0™ Connectors

Description:

Micro-Fit 3.0™ Vertical Header, 3.00mm Pitch, Single Row, 6 Circuits, with PCB Polarizing Peg, Gold, Glow Wire Compliant, Black

Documents:

- 3D Model

Test Summary TS-43045-002 (PDF)
- Drawing (PDF)

RoHS Certificate of Compliance (PDF)
- Product Specification PS-43650 (PDF)

Product Literature (PDF)

Agency Certification

CSA

LR19980

UL

E29179

General

Product Family

PCB Headers

Series

43650

Application

Power, Wire-to-Board

Comments

"High Temperature|Square Pin|Solder Type<P><P>This Molex product is manufactured from material that has the following ratings, tested by independent agencies:. a) A Glow Wire Ignition Temperature (GWIT) of at least 775 deg C per IEC 60695-2-13.. b) A Glow Wire Flammability Index (GWFI) above 850 deg C per IEC 60695-2-12.and hence complies with the requirements set out in the International Standard IEC 60335-1 5th edition - household and similar electrical appliances - safety, section 30 Resistance to heat and fire. <P><P> The customers using this product must determine its suitability for use in their particular application through testing or other acceptable means as described in end-product glow-wire flammability test standard IEC 60695-2-11 and any applicable product end-use standard(s). <P> If it is determined during the customer's evaluation of suitability, that higher performance is required, please contact Molex for possible product options."

Overview

Micro-Fit 3.0™ Connectors

Product Literature Order No

987650-5984

Product Name

Micro-Fit 3.0™

UPC

800753950870

Physical

Breakaway

No

Circuits (Loaded)

6

Circuits (maximum)

6

Color - Resin

Black

Durability (mating cycles max)

30

Flammability

94V-0

Glow-Wire Compliant

Yes

Lock to Mating Part

Yes

Mated Height

17.27mm

Material - Metal

Brass

Material - Plating Mating


Gold

Material - Plating Termination

Tin

Material - Resin

High Temperature Thermoplastic

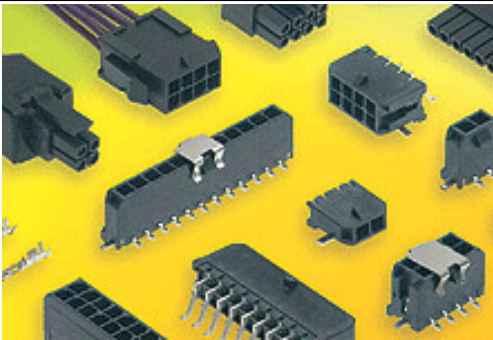

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

China RoHS

REACH SVHC

No -ED/39/2015 (15 June 2015)

Halogen-Free

Status

Low-Halogen

Need more information on product environmental compliance?

Email [productcompliance@molex.com](mailto:productcompliance@molex.com)  
Please visit the [Contact Us](#) section for any non-product compliance questions.

China ROHS  
ELV

Green Image  
Not Relevant

Search Parts in this Series

43650 Series

Mates With

43645 Micro-Fit 3.0™ Receptacle Housing

Net Weight	1.016/g
Number of Rows	1
Orientation	Vertical
PC Tail Length	3.18mm
PCB Locator	Yes
PCB Retention	None
PCB Thickness - Recommended	1.60mm
Packaging Type	Tray
Pitch - Mating Interface	3.00mm
Plating min - Mating	0.762µm
Plating min - Termination	2.540µm
Polarized to PCB	Yes
Shrouded	Fully
Stackable	No
Surface Mount Compatible (SMC)	Yes
Temperature Range - Operating	-40°C to +105°C
Termination Interface: Style	Through Hole

**Electrical**

Current - Maximum per Contact	5.0A
Voltage - Maximum	600V

**Solder Process Data**

Duration at Max. Process Temperature (seconds)	030
Lead-freeProcess Capability	SMC&WAVE
Max. Cycles at Max. Process Temperature	003
Process Temperature max. C	260

**Material Info**

**Reference - Drawing Numbers**

Product Specification	PS-43650
Sales Drawing	SD-43650-010
Test Summary	TS-43045-002

This document was generated on 12/03/2015

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**