

ESCON Connector Components

ESCON Connector Plug

Product Facts


- Multimode
- IBM Approved
- Simple field assembly

Performance Characteristics

Assembly Loss — 0.2 dB Typical

Operating Temperature —
+10°C to +60°C

Durability — 200 cycles

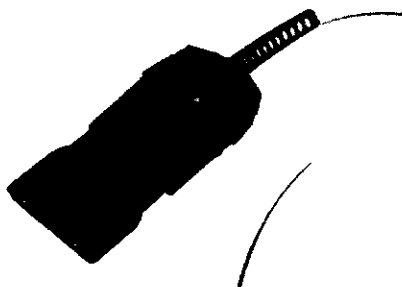

| Description | Part Number |
|-------------|-------------|
| 125 μ m | Black |
| DUALAN | 492181-1 |
| DUALAN | 492181-2* |


* Bulk packed, 50 per package
Termination Kit: 503746-6.

Instruction Sheet 408-9808

ESCON Receptacles


Product Facts

- Multimode

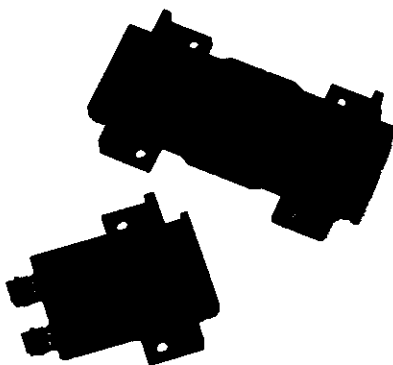

| Description | Part Number |
|----------------|-------------|
| | Black |
| ESCON to ESCON | 502825-2 |
| ESCON to ST | 502826-2 |


Receptacle Dust Cover

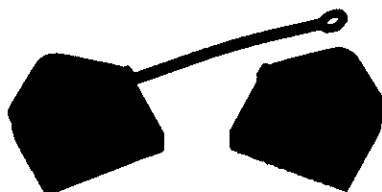

| Description | Part Number |
|------------------------|-------------|
| | Black |
| Without Mounting Strap | 503004-3 |

ESCON Assembly Fixture Kit

Used to hold ferrules during assembly, epoxy curing, and polishing. Allows simultaneous polishing of both ferrules.

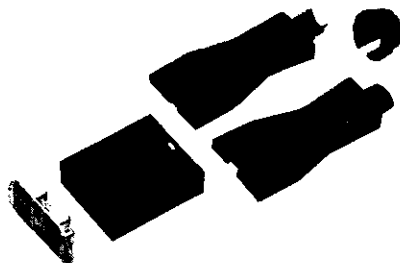

| Description | Part Number |
|---------------------------|-------------|
| | Black |
| Without Polishing Bushing | 492236-2 |
| Polishing Bushing | 492269-1 |