
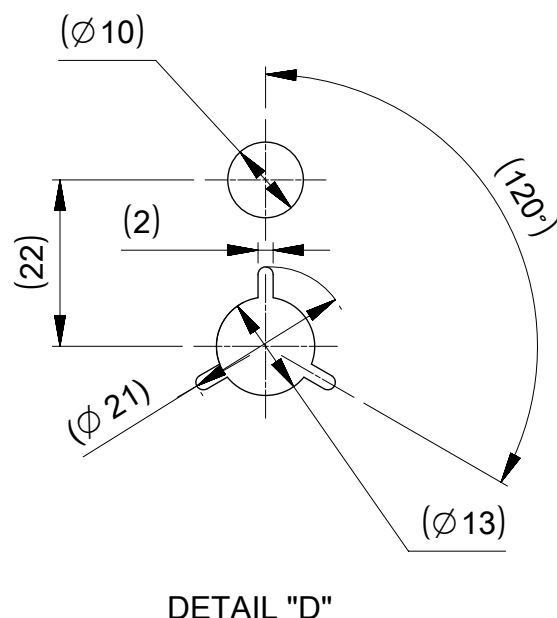


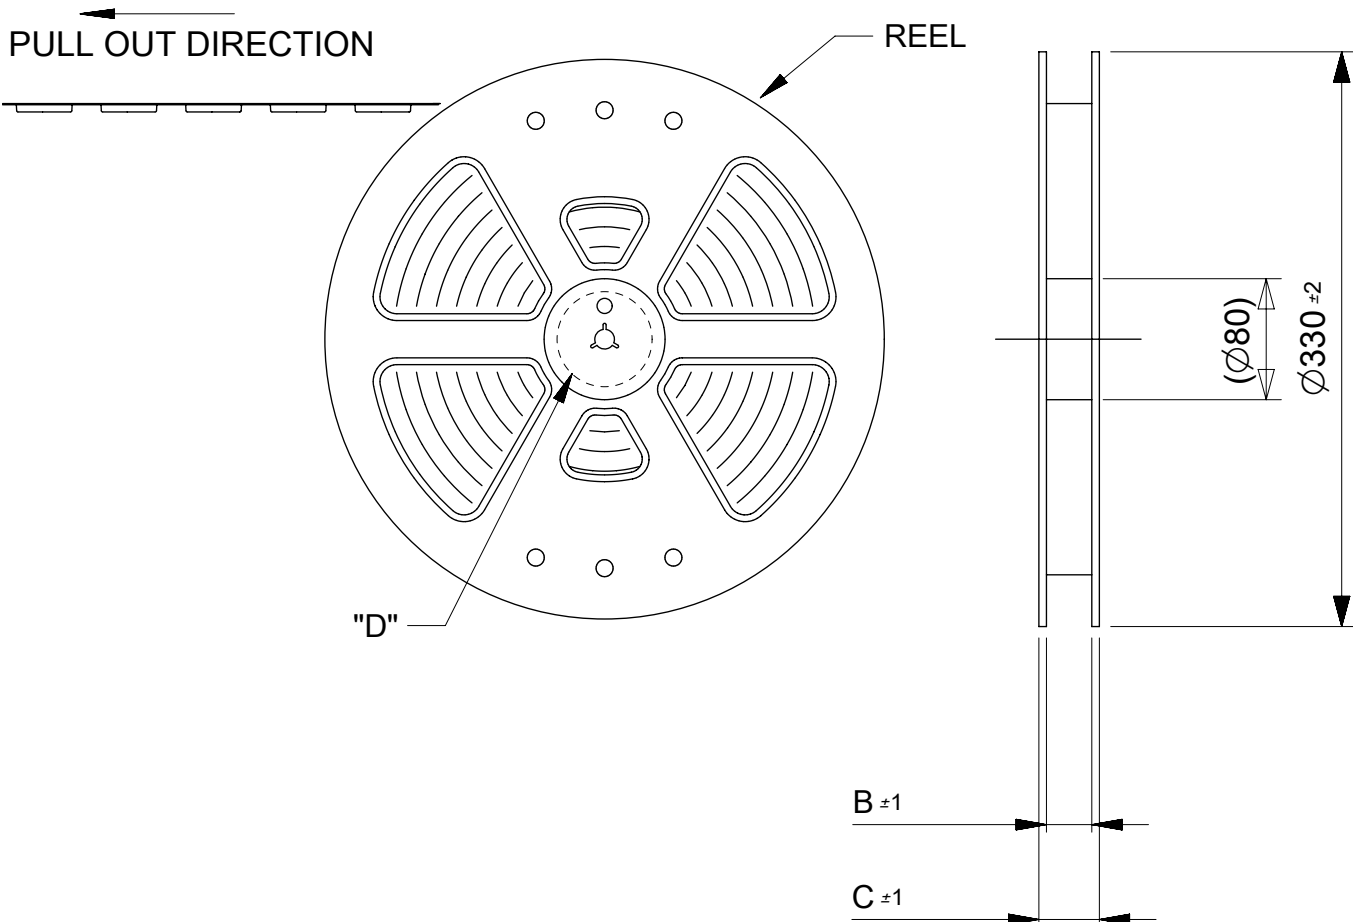


NOTES

- RE DETAILED DIMENSION, SEE PRODUCT DRAWING.
- NUMBER OF CONNECTORS : 6000 PCS/REEL.
- LEAD TAPE LENGTH.
- TOP TAPE PEEL FORCE IS DEFINED BY IEC60286-3
- MATERIAL
CARRER TAPE :POLYSTYRENE
TOP TAPE :PET , OTHER
REEL :POLYSTYRENE(PS)(RECYCLE MATERIAL CONTAINED)
- ELV AND RoHS COMPLIANT

△7 Only 6 circuit is different in this dimension.

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION													
RELEASED EC NO: 103804 DRWN: STERUKI CHK'D: KTANAKA03 REV APPR: KMORIKAWA		GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION UNITS	SCALE	molex [®]							
				MM	1:5								
		ANGULAR TOL ± 1.0 °		DRWN BY		DATE		0.35 BB CONN. SSB6 RP PLUG EMBSTP PKG					
		4 PLACES ± 0.01		STERUKI		2016/03/23							
		3 PLACES ± 0.03		CHK'D BY		DATE							
2 PLACES ± 0.05		KTANAKA03		2016/04/01		PRODUCT CUSTOMER DRAWING							
1 PLACE ± 0.1		APPR BY		DATE									
0 PLACES ± 0.2		KMORIKAWA		2016/04/01		SERIES 505070							
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		DRAWING SIZE		THIRD ANGLE PROJECTION						MATERIAL NUMBER SEE CHART		CUSTOMER GENERAL	
A				A3		5050700000		DOC TYPE PSD		DOC PART 001		SHEET NUMBER 1 OF 3	

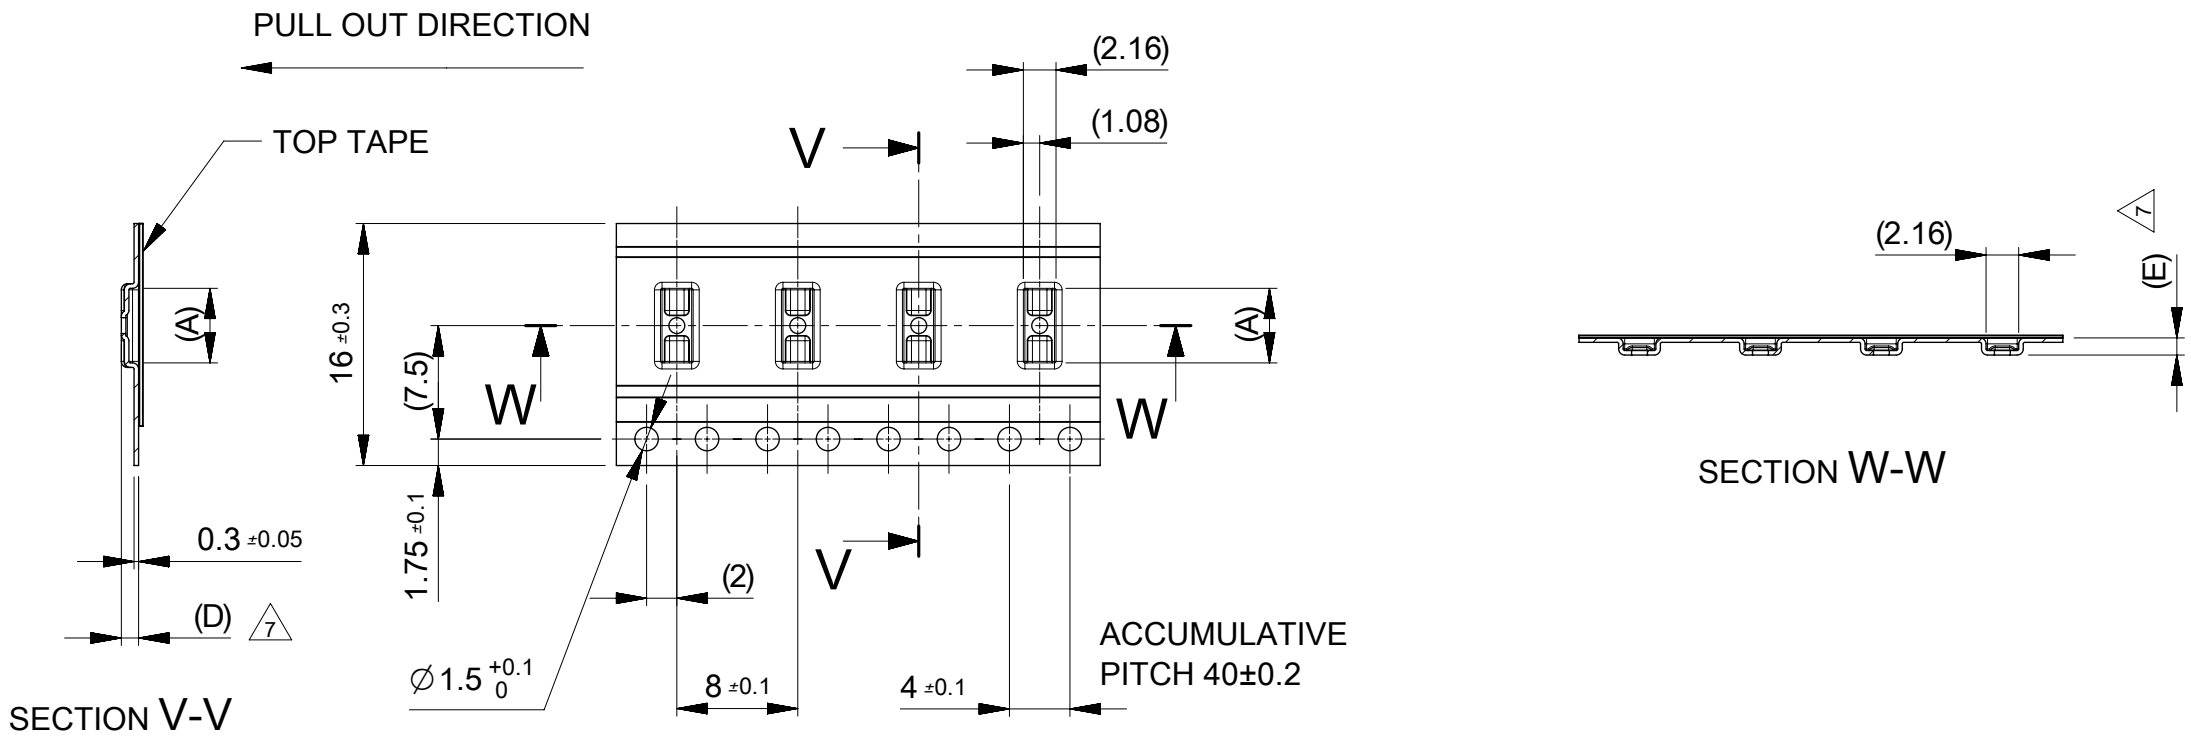

16	0.64	1.14	21.4	17.4	6.68	505070-3020	○	---	30
					5.63	505070-2420	○	---	24
					5.28	505070-2220	○	---	22
					4.93	505070-2020	○	---	20
					4.58	505070-1820	---	---	18
					4.23	505070-1620	○	---	16
					3.88	505070-1420	○	---	14
					3.53	505070-1220	○	---	12
					3.18	505070-1020	○	---	10
	0.66	1.16			2.43	505070-0620	○	---	6
キャリアテープ幅 CARRIER TAPE WIDTH	(E)	(D)	C	B	(A)	MATERIAL No.	HIGH VOL. TOOL	LOW VOL. TOOL	CIRCUIT
							SAMPLE PREPARATION		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

RELEASED

EC NO: 103804

DRWN: STERUKI

CHK'D: KTANAKA03

APP'R: KMORIKAWA

2016/03/23

2016/04/01

2016/04/01

GENERAL TOLERANCES (UNLESS SPECIFIED)

ANGULAR TOL ± 1.0 °

4 PLACES ± 0.01

3 PLACES ± 0.03

2 PLACES ± 0.05

1 PLACE ± 0.1

0 PLACES ± 0.2

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION UNITS

MM

DRWN BY

STERUKI

CHK'D BY

KTANAKA03

APPR BY

KMORIKAWA

DRAWING SIZE

A3

THIRD ANGLE PROJECTION

SCALE

2:1

0.35 BB CONN. SSB6 RP PLUG EMBSTP PKG

PRODUCT CUSTOMER DRAWING

SERIES

505070

MATERIAL NUMBER

SEE CHART

CUSTOMER

GENERAL

DOCUMENT NUMBER

5050700000

DOC TYPE


PSD

DOC PART


001


SHEET NUMBER

2 OF 3

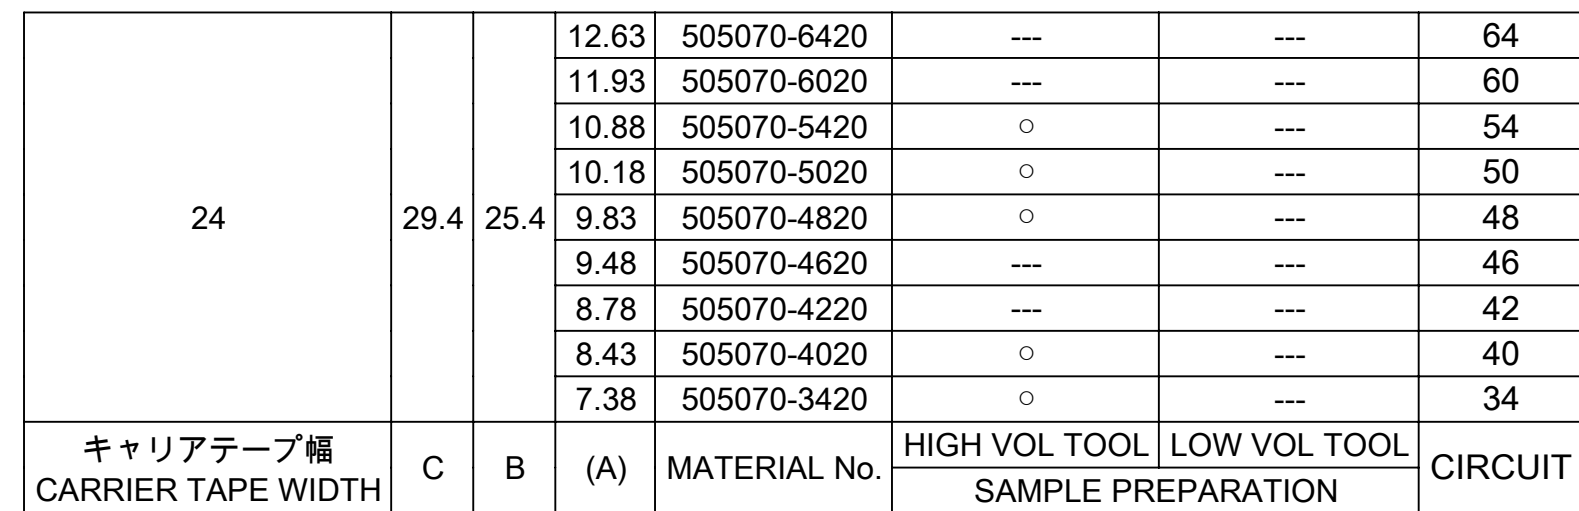


RELEASE STATUS	P1	RELEASE DATE	01.04.2016	09:08:20
----------------	----	--------------	------------	----------

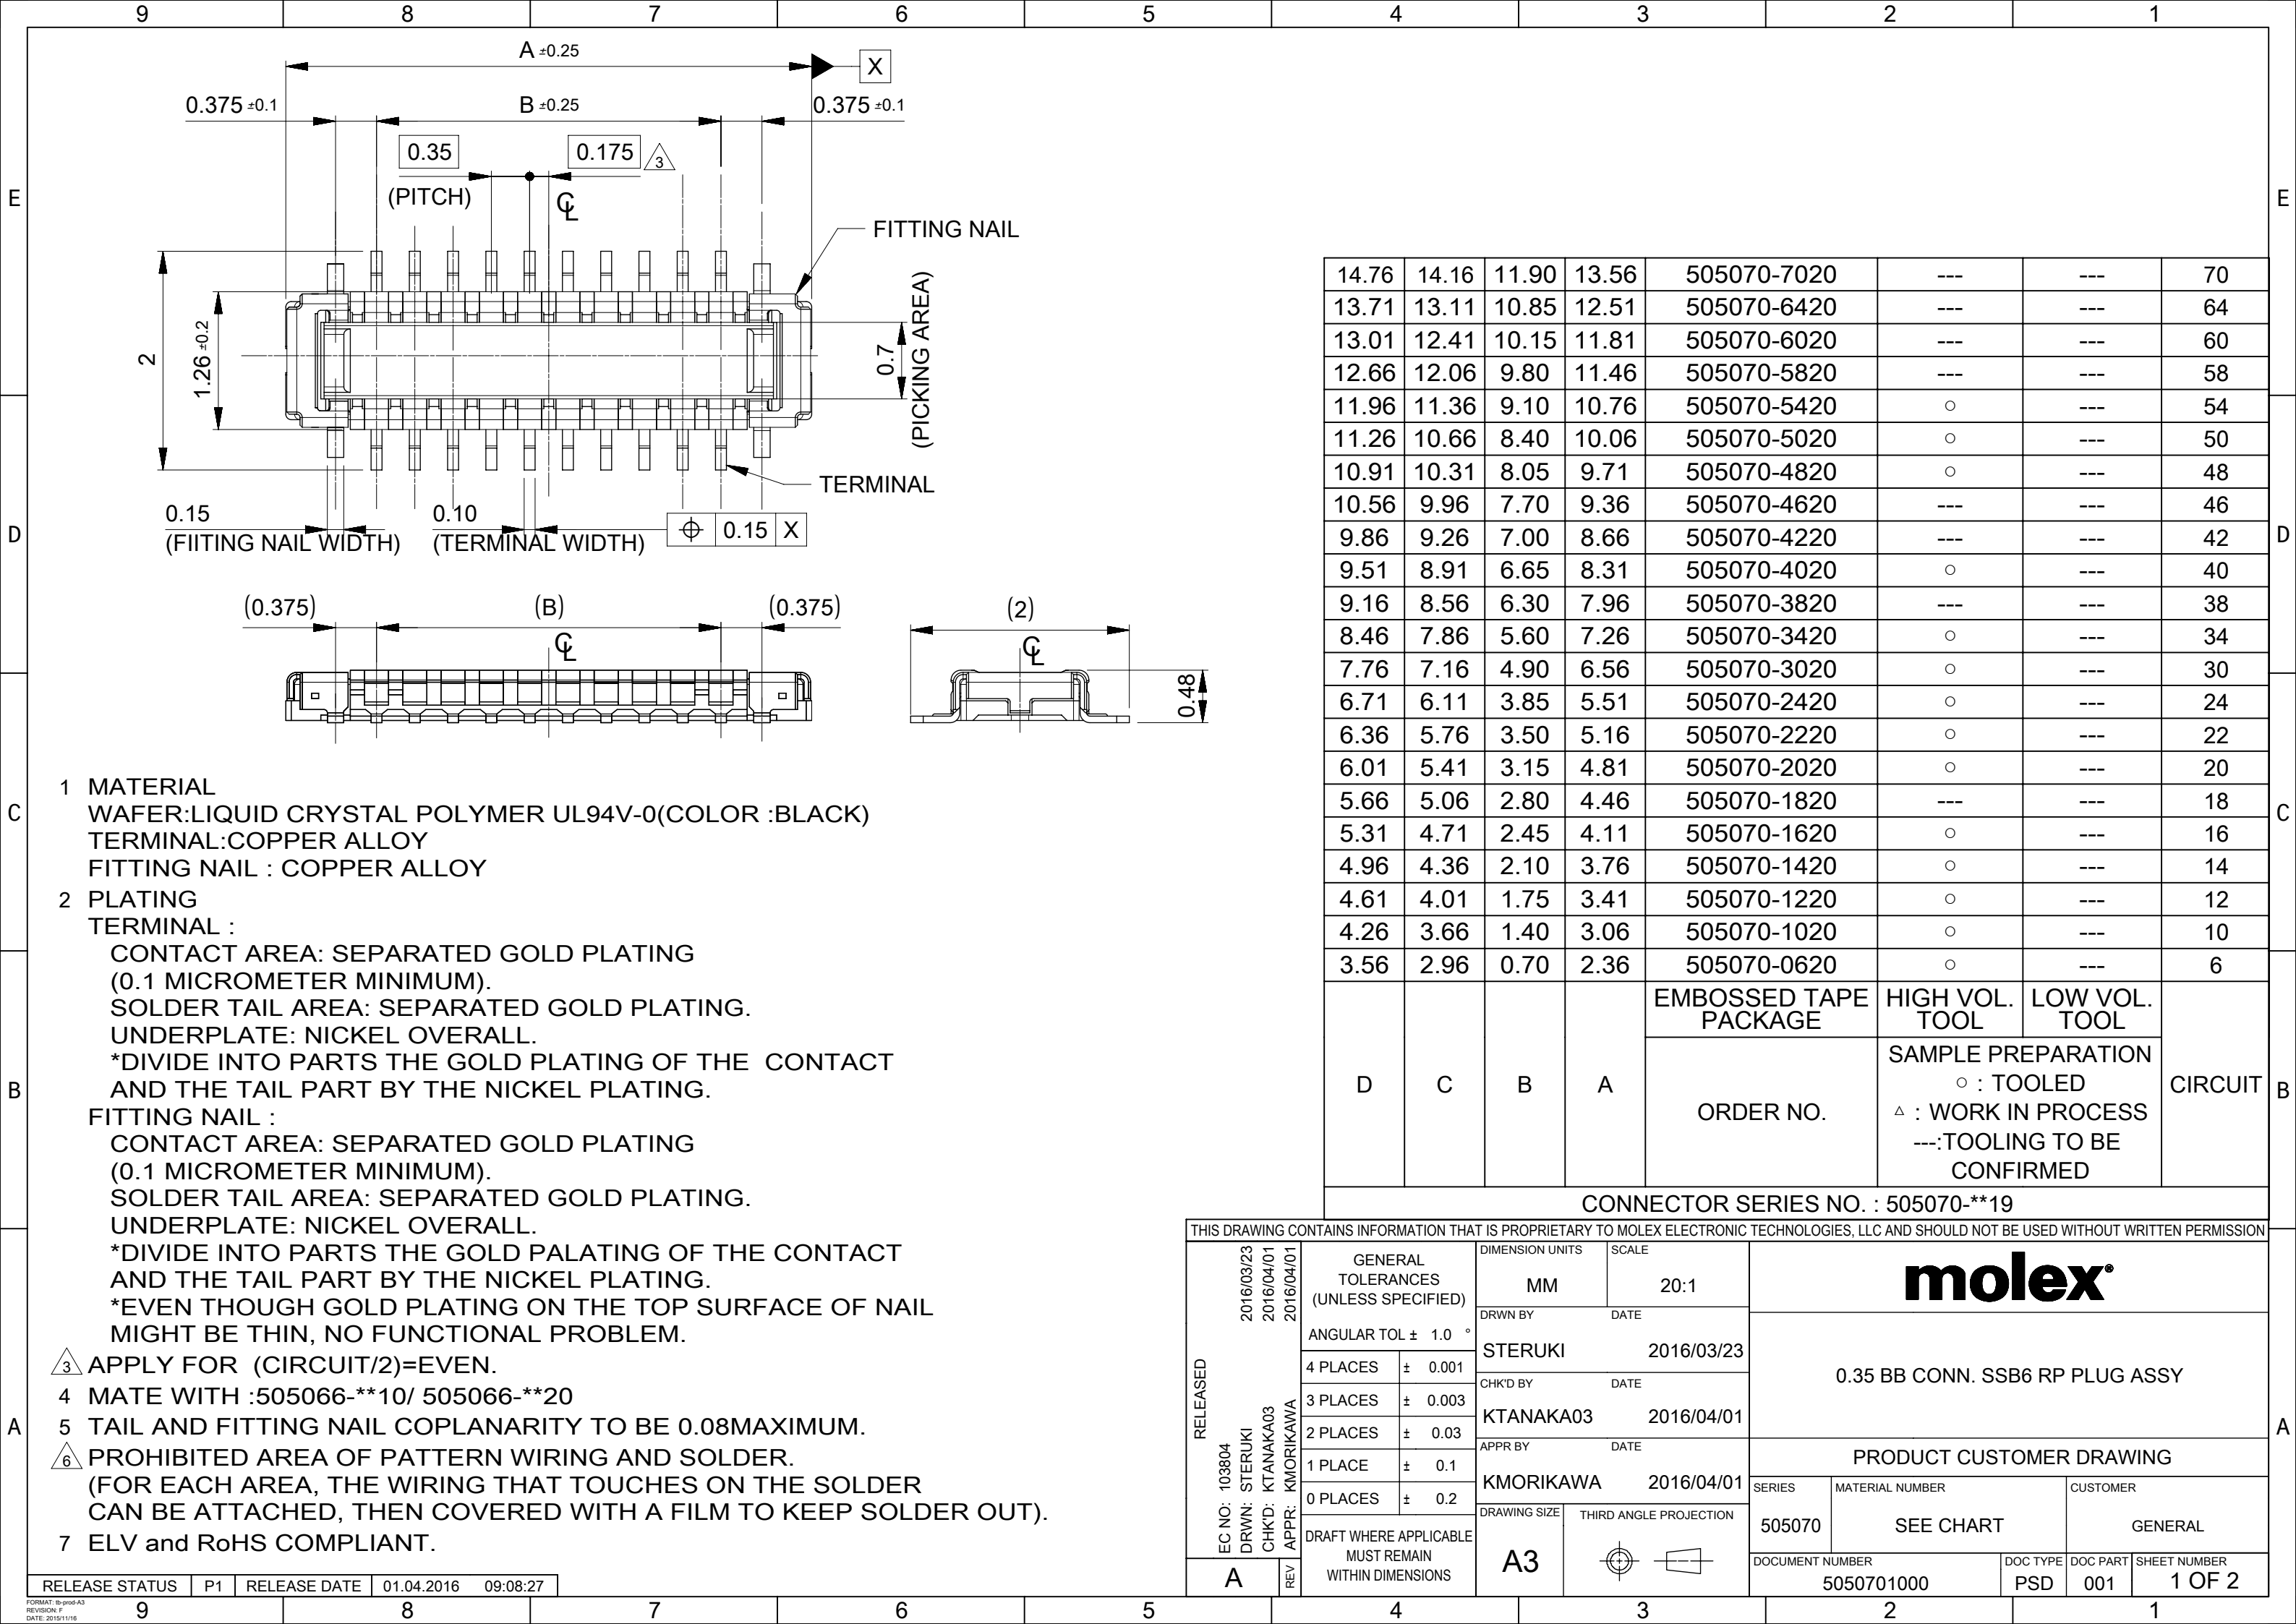

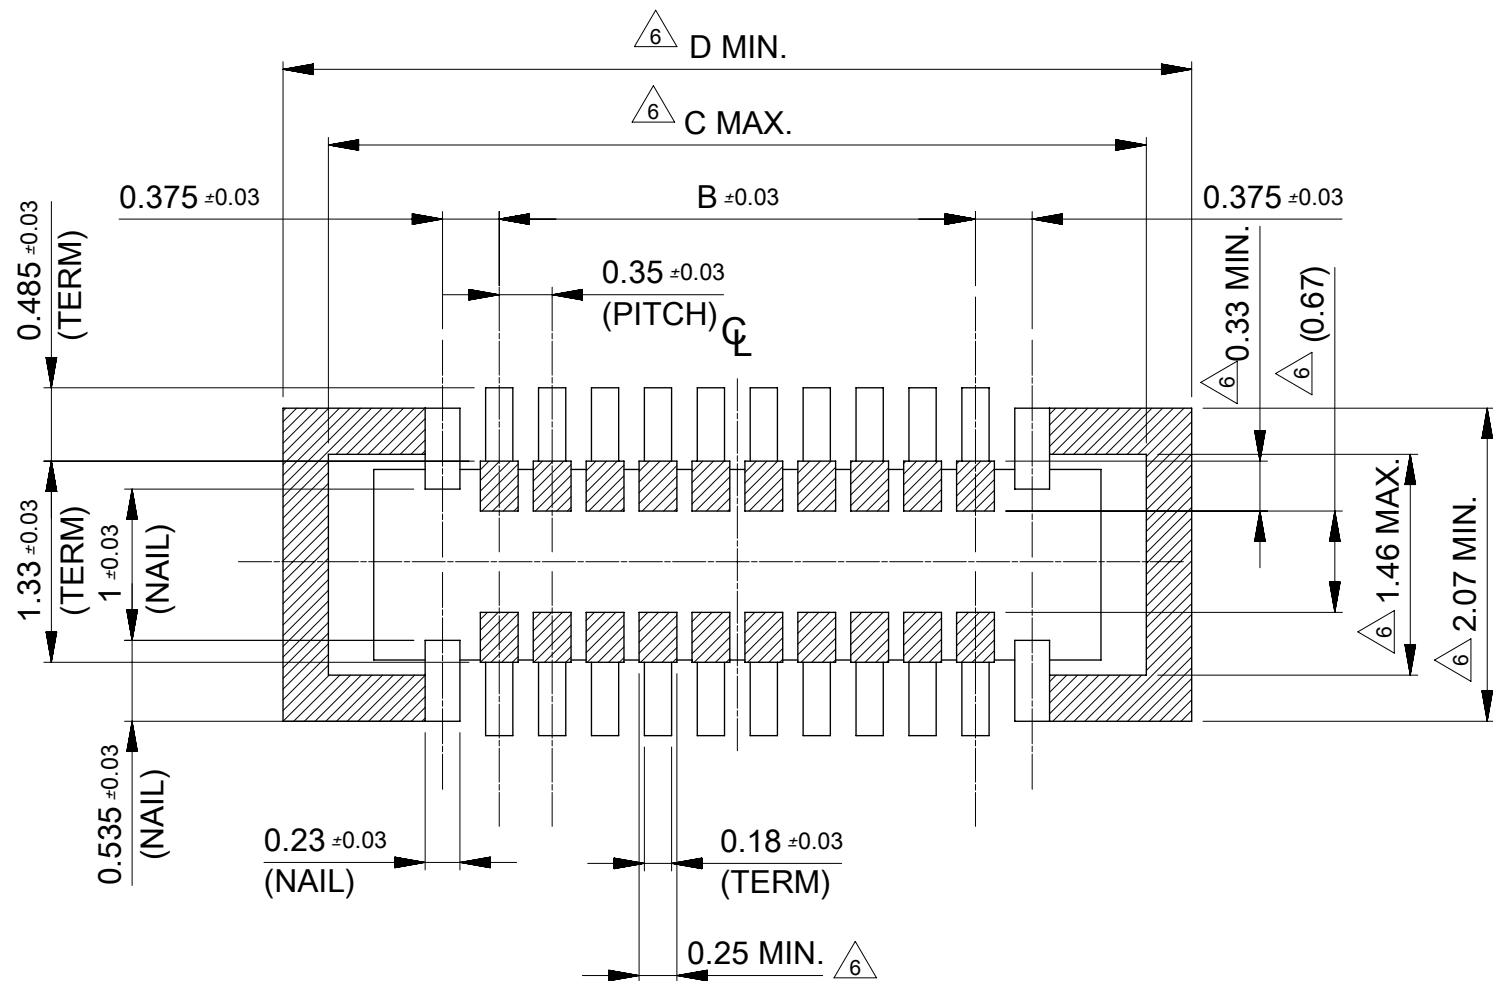


RECOMMENDED P.W.BOARD PATTERN LAYOUT(REFERENCE)

 PROHIBITED AREA OF PATTERN WIRING AND SOLDER.
(FOR EACH AREA, THE WIRING THAT TOUCHES ON THE SOLDER
CAN BE ATTACHED, THEN COVERED WITH A FILM TO KEEP SOLDER OUT.)

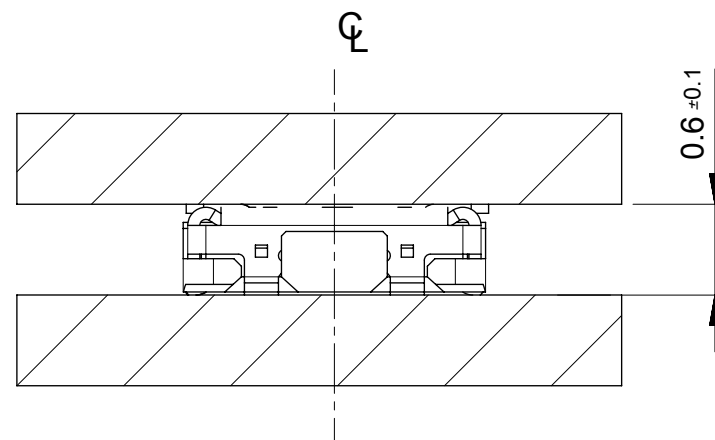

MATED CONDITION

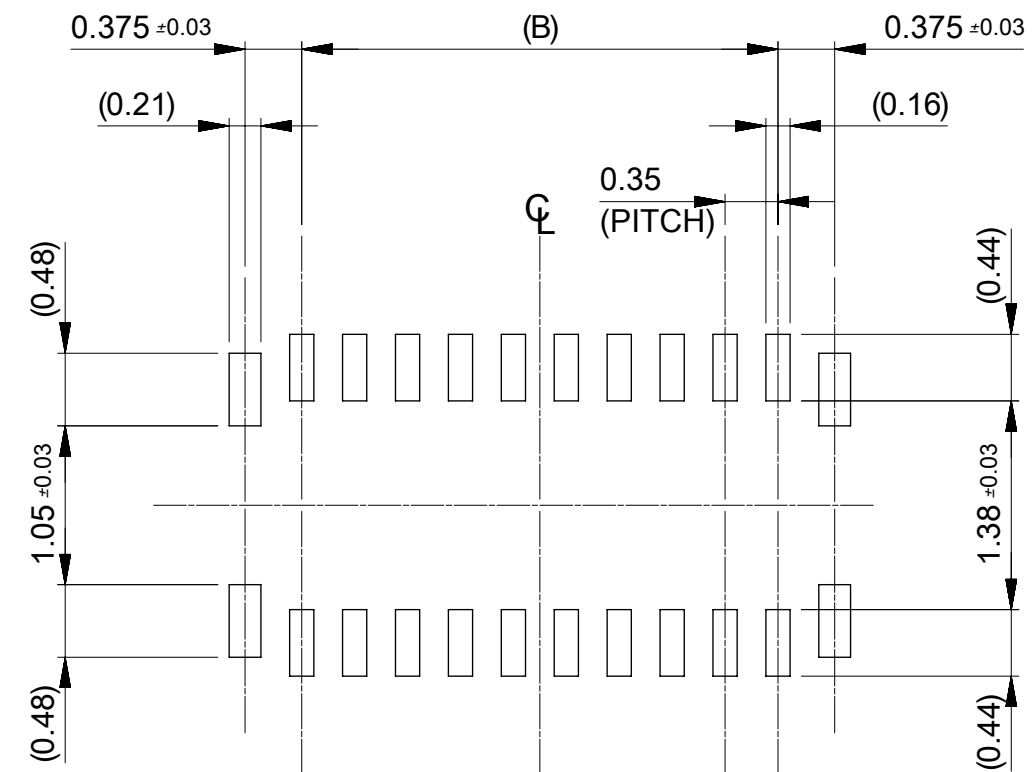

RECOMMENDED METAL MASK LAYOUT(REFERENCE)

RECOMMENDED THICKNESS OF METAL MASK : t=0.08mm
RECOMMENDED OPEN APERTURE RATIO OF METAL MASK : 80%

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																	
RELEASED EC NO: 103804 DRWN: STERUKI CHK'D: KTANAKA03 APPR: KMORIKAWA	2016/03/23 2016/04/01 2016/04/01	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION UNITS		SCALE		molex®									
				MM		20:1											
		ANGULAR TOL ± 1.0 °		DRWN BY		DATE		0.35 BB CONN. SSB6 RP PLUG ASSY									
				STERUKI		2016/03/23											
		4 PLACES ± 0.001		CHK'D BY		DATE							PRODUCT CUSTOMER DRAWING				
				KTANAKA03		2016/04/01											
		3 PLACES ± 0.003		APPR BY		DATE		SERIES MATERIAL NUMBER CUSTOMER									
	KMORIKAWA			2016/04/01													
	2 PLACES ± 0.03		DRAWING SIZE		THIRD ANGLE PROJECTION		505070		SEE CHART		GENERAL						
1 PLACE ± 0.1		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		A3				DOCUMENT NUMBER		DOC TYPE							
0 PLACES ± 0.2								5050701000		PSD							
A		REV								SHEET NUMBER							
										2 OF 2							