


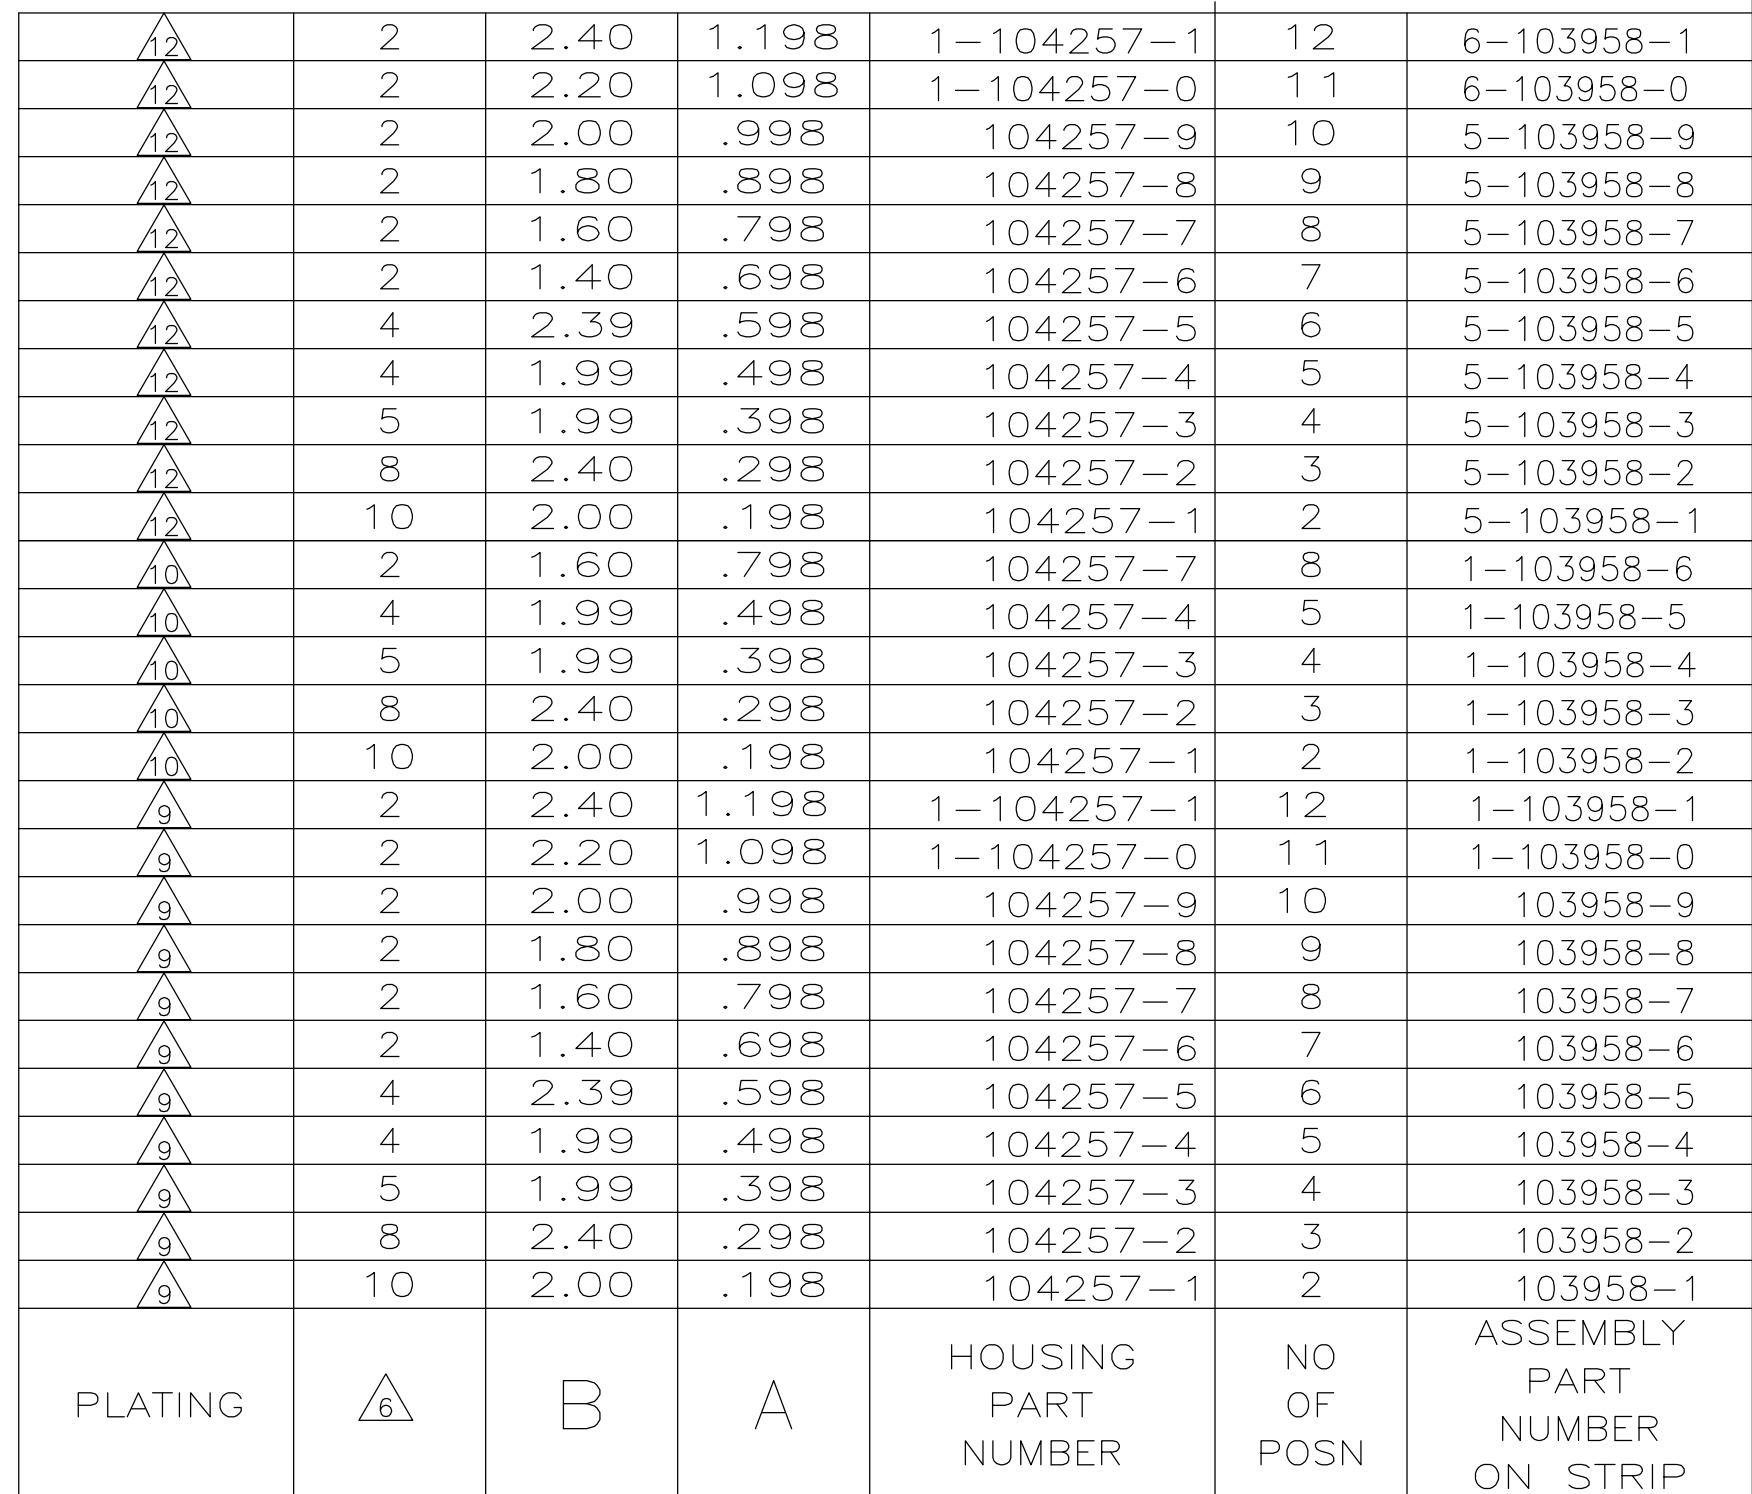

- ① CONTACTS ARE LATCHED INTO THE PRELOAD WINDOWS
- ② USE WITH #22-#26 AWG WIRE SIZE, .054/.030 INSULATION DIAMETER, .015 MAXIMUM INSULATION THICKNESS
- ③ THE DIMENSION APPLIES WITH THE FORWARD PRELOAD STOP IN CONTACT WITH THE HOUSING SURFACE
- ④ POINT OF MEASUREMENT FOR PLATING THICKNESS
- 5 FOR INDIVIDUAL ASSEMBLIES SEE PART NUMBER 103734
- ⑥ ASSEMBLIES ARE JOINED BY THE CARRIER STRIP. ORDER QUANTITY REFLECTS TOTAL NUMBER OF INDIVIDUAL ASSEMBLIES REQUIRED. SEE TABLE FOR NUMBER OF ASSEMBLIES PER STRIP.
- ⑦ POINT OF MEASUREMENT FOR PLATING THICKNESS (INSIDE BEAMS)
- ⑧ MAXIMUM ALLOWABLE BOW OF ASSEMBLY NOT TO EXCEED .055.
- ⑨ .000030 GOLD IN THE CONTACT AREA. .000050—.000100 BRIGHT TIN—LEAD ON THE TERMINATION AREA, ALL OVER .000050 NICKEL.
- ⑩ .000030 GOLD IN THE CONTACT AREA. .000050—.000100 BRIGHT TIN ON THE TERMINATION AREA, ALL OVER .000050 NICKEL.
- ⑪ PRELIMINARY PART — NOT RELEASED FOR PRODUCTION.
- ⑫ .000030 GOLD IN THE CONTACT AREA, .000050 —.000100 MATTE TIN ON THE TERMINATION AREA, ALL OVER .000050 NICKEL

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L A MAYER 11-4-86		 TE Connectivity			
		CHK P de Jong 11-12-86					
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD P de Jong 11-12-86		NAME	
		0 PLC ± -		PRODUCT SPEC		RCPT ASSY, AMPMODU MTE, SINGLE ROW, .100 C/L, LATCHED & POLARIZED, FOR NO 22-NO 26 AWG WIRE SIZE, STRIP FORM	
		1 PLC ± -		108-25034			
		2 PLC ± .02					
		3 PLC ± .005		APPLICATION SPEC			
		4 PLC ± -		114-25026			
MATERIAL		FINISH		WEIGHT		RESTRICTED TO	
HOUSING:		SEE TABLE		-		-	
CUSTOMER DRAWING						SIZE A2	
						CAGE CODE 00779	
						DRAWING NO C-103958	
						SCALE 4:1	
						SHEET 1 of 1	
						REV P1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5-103958-3](#)