


RECOMMENDED PCB LAYOUT
 FOR USE WITH .008 THICK STENCIL

- △ THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND THE HOUSING.
- △ 0.000762[.000030] GOLD ON CONTACT AREA, 0.00254[.000100]-0.00508[.000200] MATTE TIN-LEAD ON SOLDER TAIL, ALL OVER 0.00127[.000050] NICKEL.
- △ HOUSING: LCP, COLOR-BLACK. POSTS: PHOSPHOR BRONZE.
- △ 0.000762[.000030] GOLD ON CONTACT AREA, 0.00254[.000100]-0.00508[.000200] MATTE TIN ON SOLDER TAIL, ALL OVER 0.00127[.000050] NICKEL.
- △ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

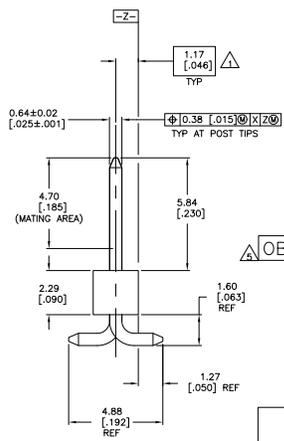

△	35.56 [1.400]	14	35.69 [1.484]	15	6-146128-3
△	33.02 [1.300]	13	33.15 [1.384]	14	6-146128-2
△	30.48 [1.200]	12	30.61 [1.284]	13	6-146128-1
△	27.94 [1.100]	11	28.07 [1.184]	12	6-146128-0
△	25.40 [1.000]	10	27.53 [1.084]	11	6-146128-9
△	22.86 [.900]	9	24.99 [.984]	10	5-146128-8
△	20.32 [.800]	8	22.45 [.884]	9	5-146128-7
△	17.78 [.700]	7	19.91 [.784]	8	5-146128-6
△	15.24 [.600]	6	17.37 [.684]	7	5-146128-5
△	12.70 [.500]	5	14.83 [.584]	6	5-146128-4
△	7.62 [.300]	3	9.75 [.384]	4	5-146128-2
△	5.08 [.200]	2	7.21 [.284]	3	5-146128-1
△	35.56 [1.400]	14	35.69 [1.484]	15	1-146128-3
△	33.02 [1.300]	13	33.15 [1.384]	14	1-146128-2
△	30.48 [1.200]	12	30.61 [1.284]	13	1-146128-1
△	27.94 [1.100]	11	28.07 [1.184]	12	1-146128-0
△	25.40 [1.000]	10	27.53 [1.084]	11	1-146128-9
△	22.86 [.900]	9	24.99 [.984]	10	1-146128-8
△	20.32 [.800]	8	22.45 [.884]	9	146128-7
△	17.78 [.700]	7	19.91 [.784]	8	146128-6
△	15.24 [.600]	6	17.37 [.684]	7	146128-5
△	12.70 [.500]	5	14.83 [.584]	6	146128-4
△	7.62 [.300]	3	9.75 [.384]	4	146128-2
△	5.08 [.200]	2	7.21 [.284]	3	146128-1

PLATING	C	B	A	NO OF POSN	PART NUMBER
THIS DRAWING IS A CONTROLLED DOCUMENT. DATE: 03-20-11 INCHES: DIMENSIONS: 0.0005 INCHES SURFACE FINISH: 0.0005 INCHES SURFACE MOUNT HEADER ASSEMBLY, MOD II, BREAKAWAY, VERTICAL, SINGLE ROW, 100 X 100 C/L, .025 SQ POST SIZE: 10-11 CUSTOMER DRAWING: 00779 (G=146128)					