



LOC		DIST		REVISIONS				
P	LTR	DESCRIPTION			DATE	DWN	APVD	
	A	RELEASE (ECR-05-001155)			5APR05	L.Z	I.E	
	A1	REVISED PER ECO-09-024927			10NOV09	KK	AEG	


D

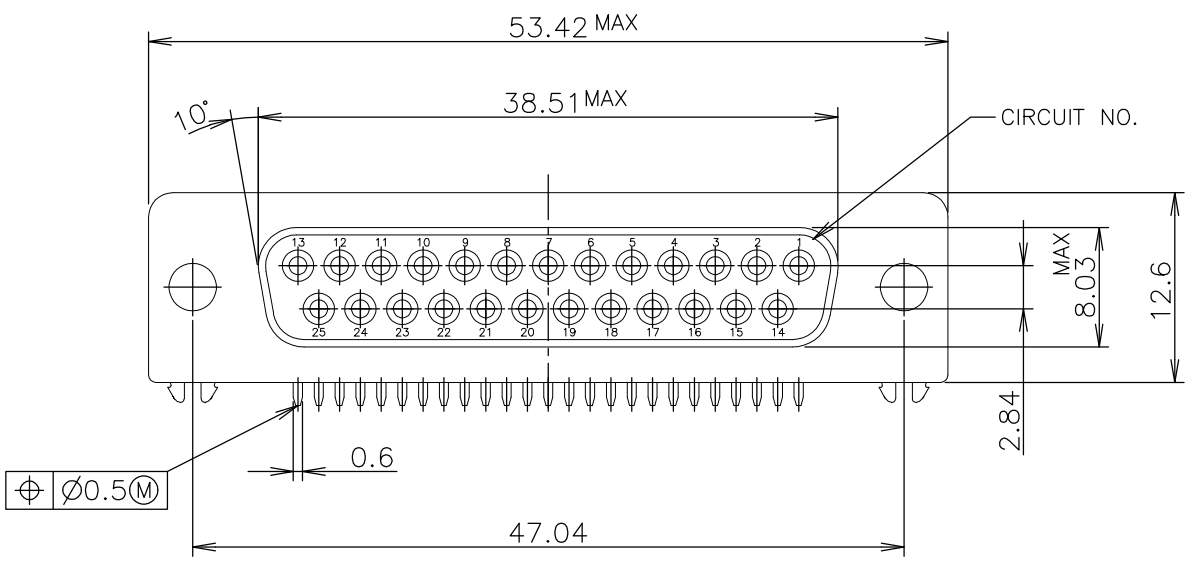

C

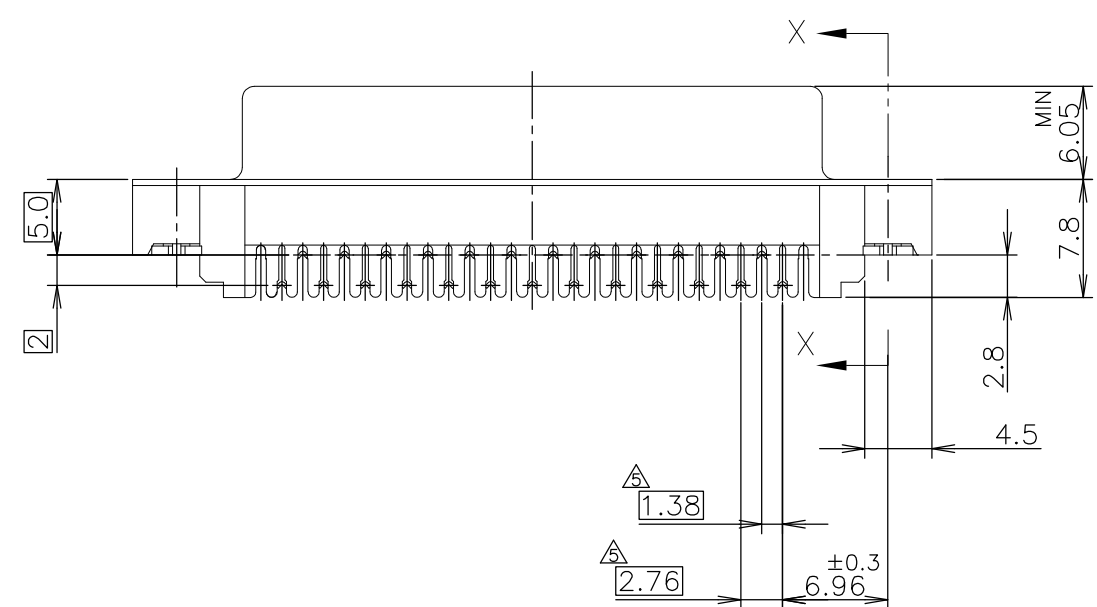


B

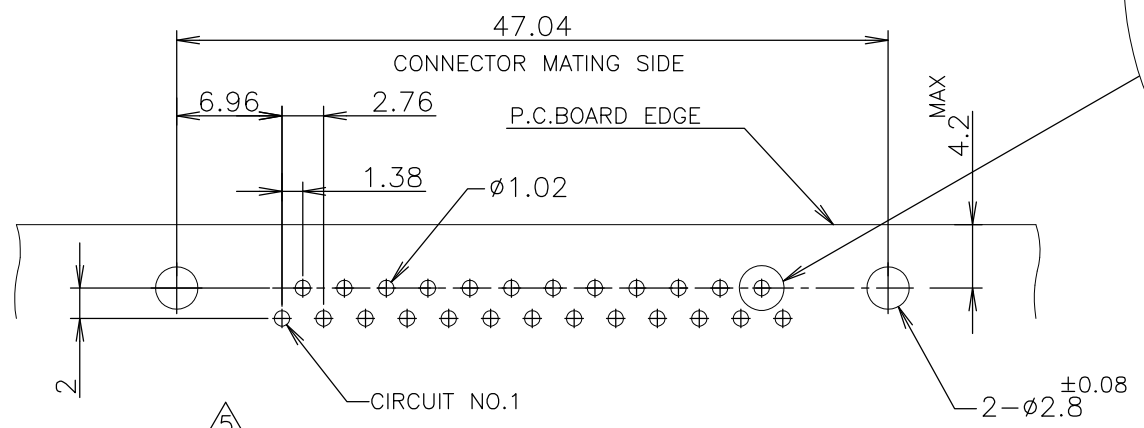

A

5 P. C. BOARD MOUNTING DIMENSIONS (± 0.1)
THK=0.8~1.6


GENERAL TOLERANCE	
10 $\geq$:	± 0.2
30 $\geq$ > 10:	± 0.25
100 $\geq$ > 30:	± 0.3
ANGLES :	$\pm 3^\circ$

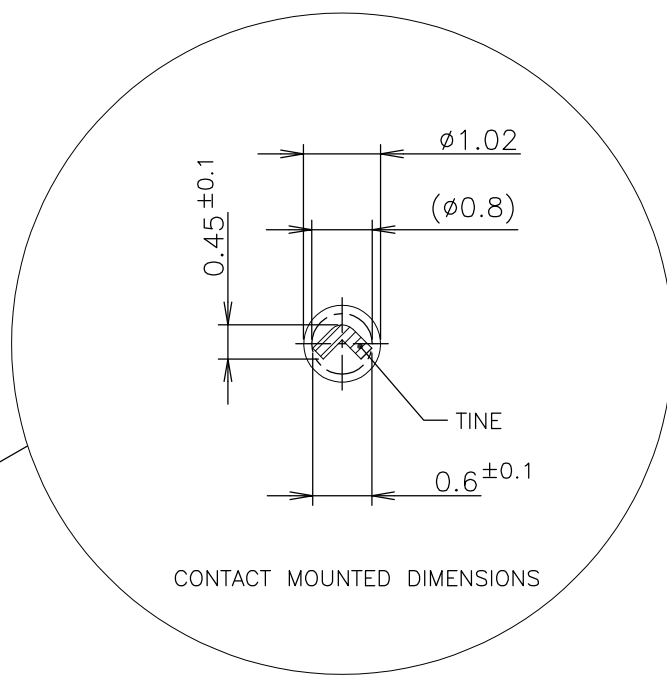

THIS DRAWING IS A CONTROLLED DOCUMENT.	
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:
	0 PLC $\pm$
	1 PLC $\pm$
	2 PLC $\pm$
	3 PLC $\pm$
	4 PLC $\pm$
MATERIAL SEE NOTE 2	ANGLES $\pm$
	FINISH SEE NOTE 3

DWN LEO ZHOU 5APR05	CHK STEVEN YAO 5APR05	APVD I.ENOMOTO 5APR05	Tyco Electronics Tyco Electronics AMP K.K. Kawasaki, Japan	
PRODUCT SPEC			NAME RECEPTACLE ASSY RIGHT ANGLE SIZE 3, 25P LOW PROFILE STD-D P.C.B t=0.8~1.6 DIP L=2.80 AMPLIMITE III-J ULTRA SLIM HD-20	
APPLICATION SPEC			SIZE A3	CAGE CODE 00779
WEIGHT			DRAWING NO C-5179953	RESTRICTED TO
CUSTOMER DRAWING			SCALE 2:1	SHEET 1 OF 1
			REV A1	

- 1 THESE PRODUCTS CONFORM AMP SPEC 108-5400.
- 2 MATERIAL
HOUSING: THERMOPLASTEC
SHELL: CARBON STEEL
CONTACT: COPPER ALLOY
RETENTION LEG: COPPER ALLOY
- 3 FINISH
CONTACT: GOLD PL.
SHELL: TIN PL.
RETENTION LEG: TIN PL.
- 4 SCREWLOCK OR SCREW MUST BE ASSEMBLED BEFORE PLUG CONNECTOR MATING.
(SCREW ON TORQUE: 5kg-cmMAX)
- 5 P. C. BOARD MOUNTING DIMENSION CONFORM MIL SPEC. (MS-18275)
- 6 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

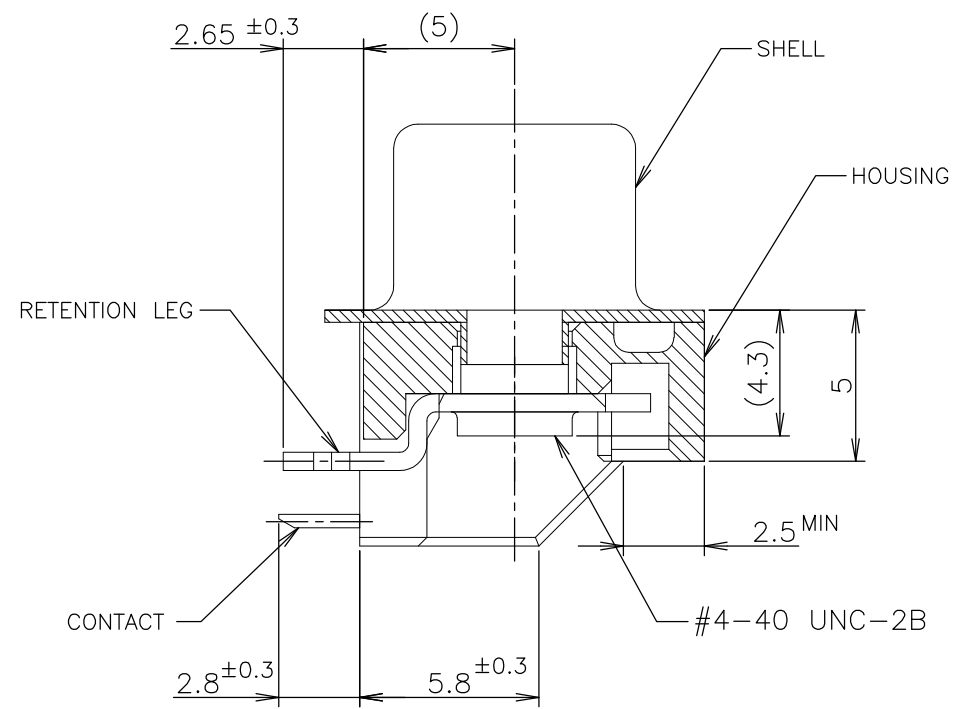

Au: 0.00076 MIN.	6 9
Au: FLASH	5179953-3
FINISH	P/N

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5179953-3](#)