

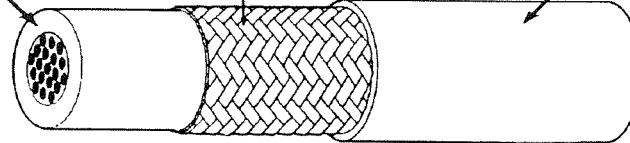
SPECIFICATION CONTROL DRAWING

55PC2111TITLE
ONE CONDUCTOR CABLE, FLAT BRAID SHIELDED, JACKETED, 600 VOLTDate
11-13-95Revision
E

This specification sheet forms a part of the latest issue of Raychem Specification 55PC.

COMPONENT WIRE - 55PC0111

SHIELD - TIN-COATED COPPER

JACKET - RADIATION-CROSSLINKED,
MODIFIED ETFE

CONSTRUCTION DETAILS

PART NUMBER	CONDUCTOR SIZE (AWG)	SHIELD STRAND THICKNESS ($\pm .0004$)	JACKET THICKNESS (in.)		DIAMETER (in.)			WEIGHT (lbs/1000 ft.)	
			LOWER SPEC LIMIT	TARGET WALL	LOWER SPEC LIMIT	TARGET VALUE	UPPER SPEC LIMIT	TARGET VALUE	UPPER SPEC LIMIT
55PC2111-24-*	24	.0015	.0055	.0070	.052	.056	.060	3.51	3.82
55PC2111-22-*	22	.0015	.0055	.0070	.058	.062	.066	4.63	4.97
55PC2111-20-*	20	.0015	.0055	.0070	.066	.070	.074	6.36	6.75
55PC2111-18-*	18	.0015	.0055	.0070	.075	.080	.084	8.89	9.41
55PC2111-16-*	16	.0015	.0055	.0070	.083	.087	.092	10.93	11.48
55PC2111-14-*	14	.0015	.0055	.0070	.097	.102	.106	15.89	16.57
55PC2111-12-*	12	.0015	.0060	.0075	.117	.122	.127	23.55	24.40
55PC2111-10-*	10	.0015	.0060	.0075	.142	.148	.154	36.13	37.42

CABLE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 150°C

Maximum continuous conductor temperature

VOLTAGE RATING: 600 volts (rms)**DIELECTRIC WITHSTAND: 1500 volts (rms), 60 Hz****CROSSLINK VERIFICATION: 300 $\pm$ 3°C for 1 hour****JACKET COLOR: White preferred****JACKET ELONGATION AND TENSILE STRENGTH:**

Elongation, 50% (minimum)

Tensile Strength, 5000 lbf/in² (minimum)**JACKET FLAWS:**

Spark Test, 1000 volts (rms), 60 Hz, 100% test

Impulse Dielectric Test, 6.0 kV (peak), 100% test

SHIELD COVERAGE: 85% (minimum)**VOLTAGE WITHSTAND TEST (POST ENVIRONMENTAL):**

1000 volts (rms), 60 Hz, 1 minute

PART NUMBER:

The "*" in the part numbers above shall be replaced by a color code designator with a dash separating the component wire color from the jacket color.

Example: AWG 22, white component wire;
white jacket: 55PC2111-22-9-9

COLOR AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-881.

Raychem

Raychem Corporation
300 Constitution Drive, Menlo Park, California 94025
1-800-2 Raychem Fax: 1-415-361-6297

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity:

[55PC2111-16-9-9CS2743](#) [55PC2111-18-9-9](#) [55PC2111-22-9-4CS2970](#) [55PC2111-24-9-9](#) [55PC2111-10-9-9](#)
[55PC2111-20-9-9CS2502](#) [55PC2111-18-9-9CS2970](#) [55PC2111-16-9-9CS2502](#) [55PC2111-16-9-9CS2970](#) [55PC2111-](#)
[18-9-4CS2502](#) [55PC2111-20-9-9CS2666](#) [55PC2111-22-9-9-L002](#) [55PC2111-18-9-9CS2502](#) [55PC2111-20-9-](#)
[9CS2970](#) [55PC2111-20-9-4CS2502](#) [55PC2111-20-9-92CS2502](#) [55PC2111-14-9-9](#) [55PC2111-22-9-9CS2970](#)
[55PC2111-18-9-4CS2970](#) [55PC2111-22-9-92CS2970](#) [55PC2111-22-9-9CS2666](#) [55PC2111-16-9-9-L002](#) [55PC2111-](#)
[22-9-9CS2502](#) [55PC2111-22-9-92CS2502](#) [55PC2111-22-9-4CS2502](#) [55PC2111-20-9-92CS2970](#) [55PC2111-22-9-95](#)
[55PC2111-22-9-9CS2743](#) [55PC2111-22-9-9CK4500](#) [55PC2111-20-9-9CS2623](#) [55PC2111-20-9-9CK4500](#)
[55PC2111-24-9-9CS2623](#) [55PC2111-20-9-9-L293](#)