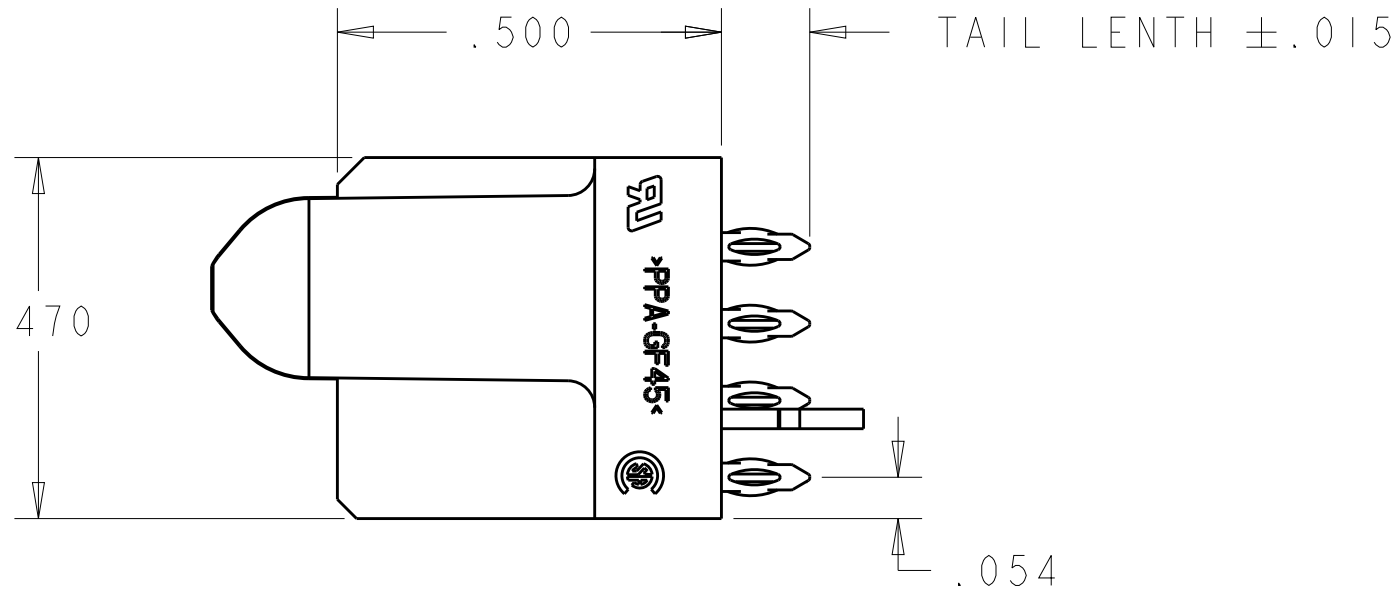
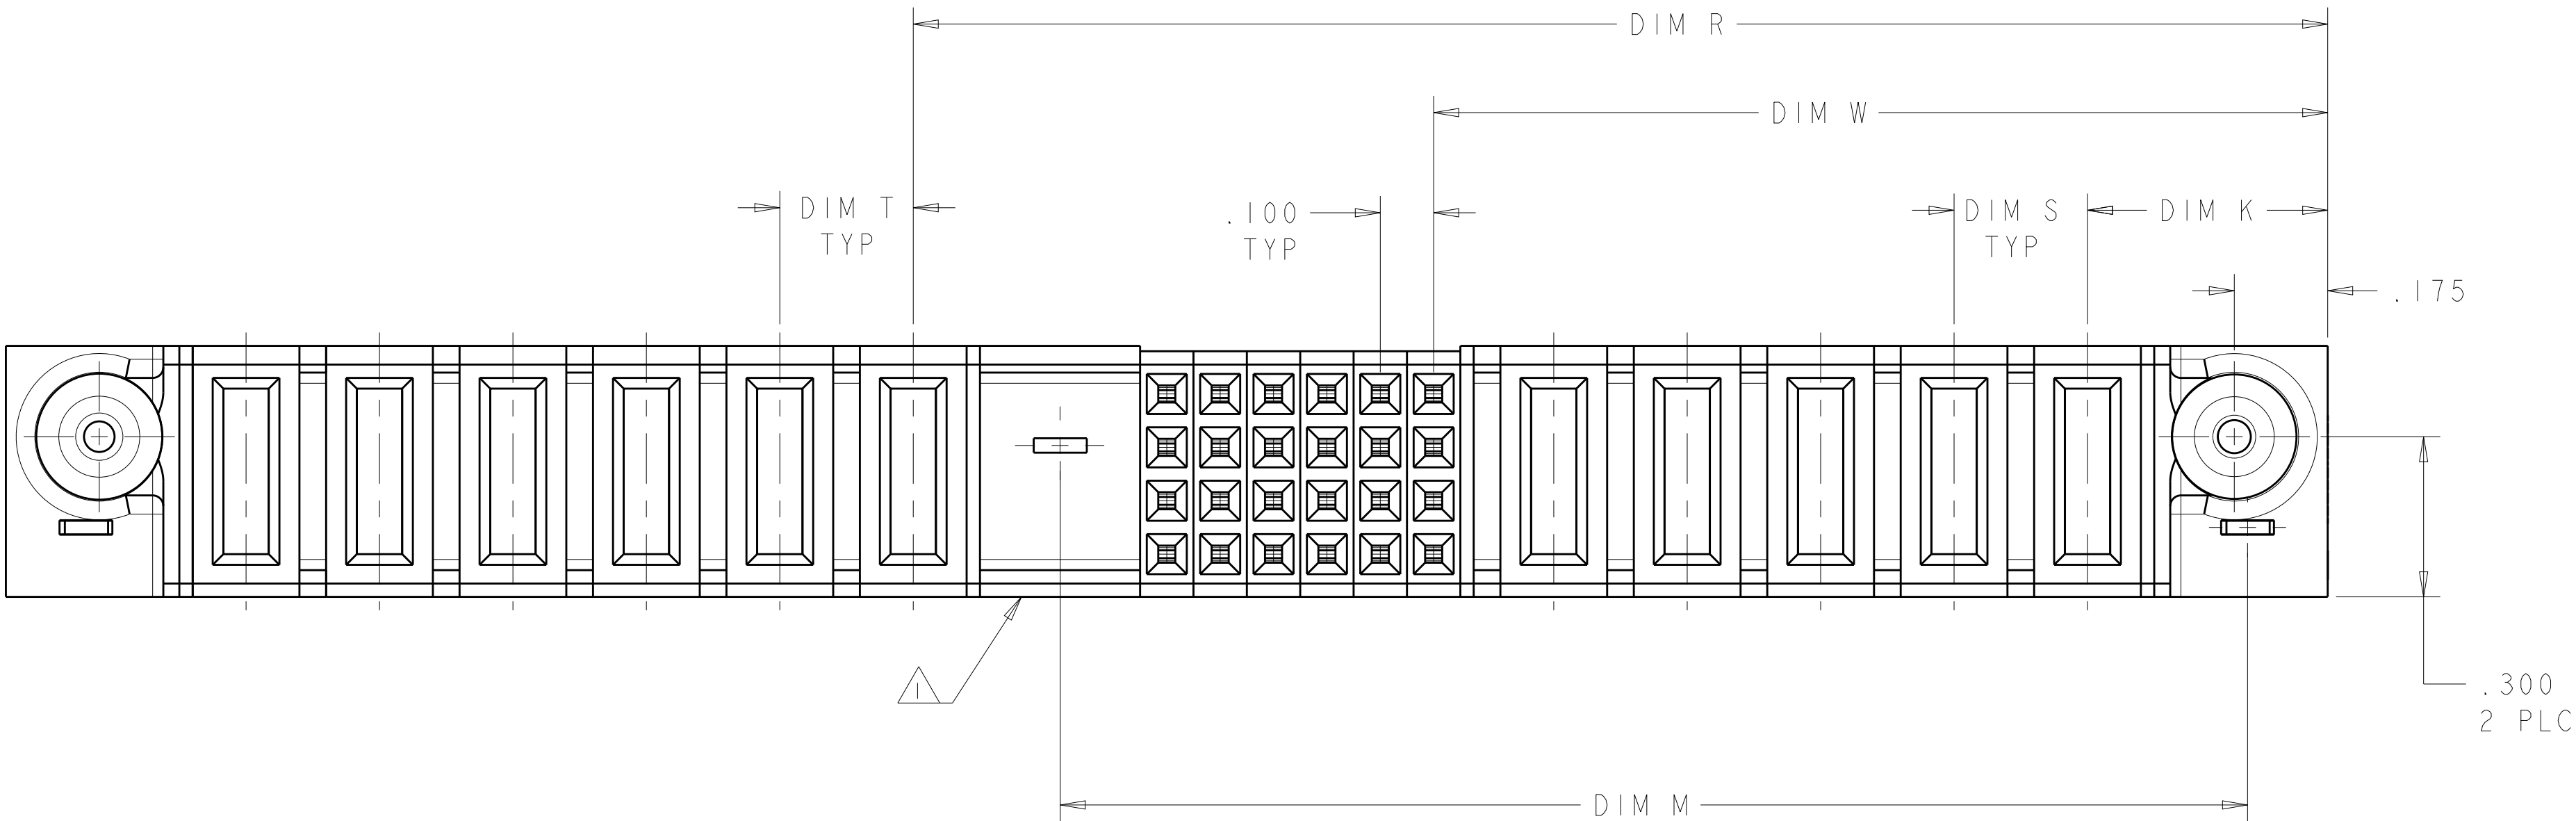
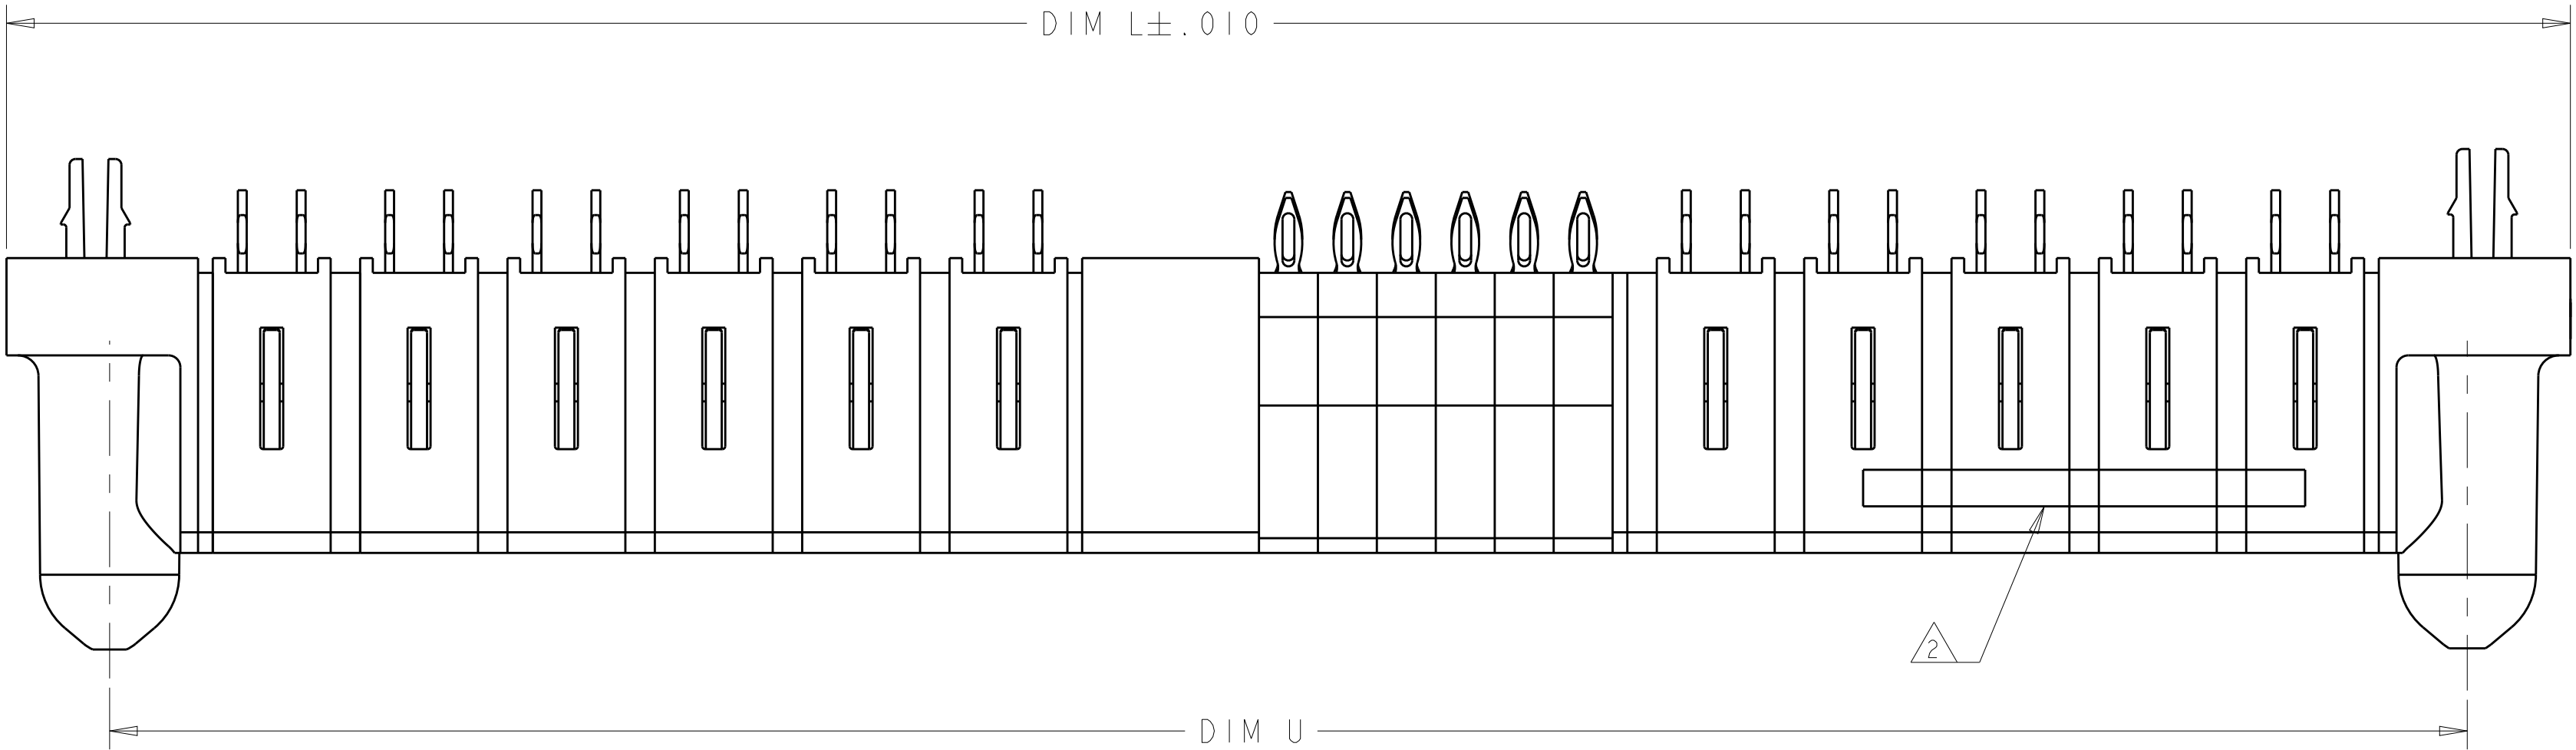
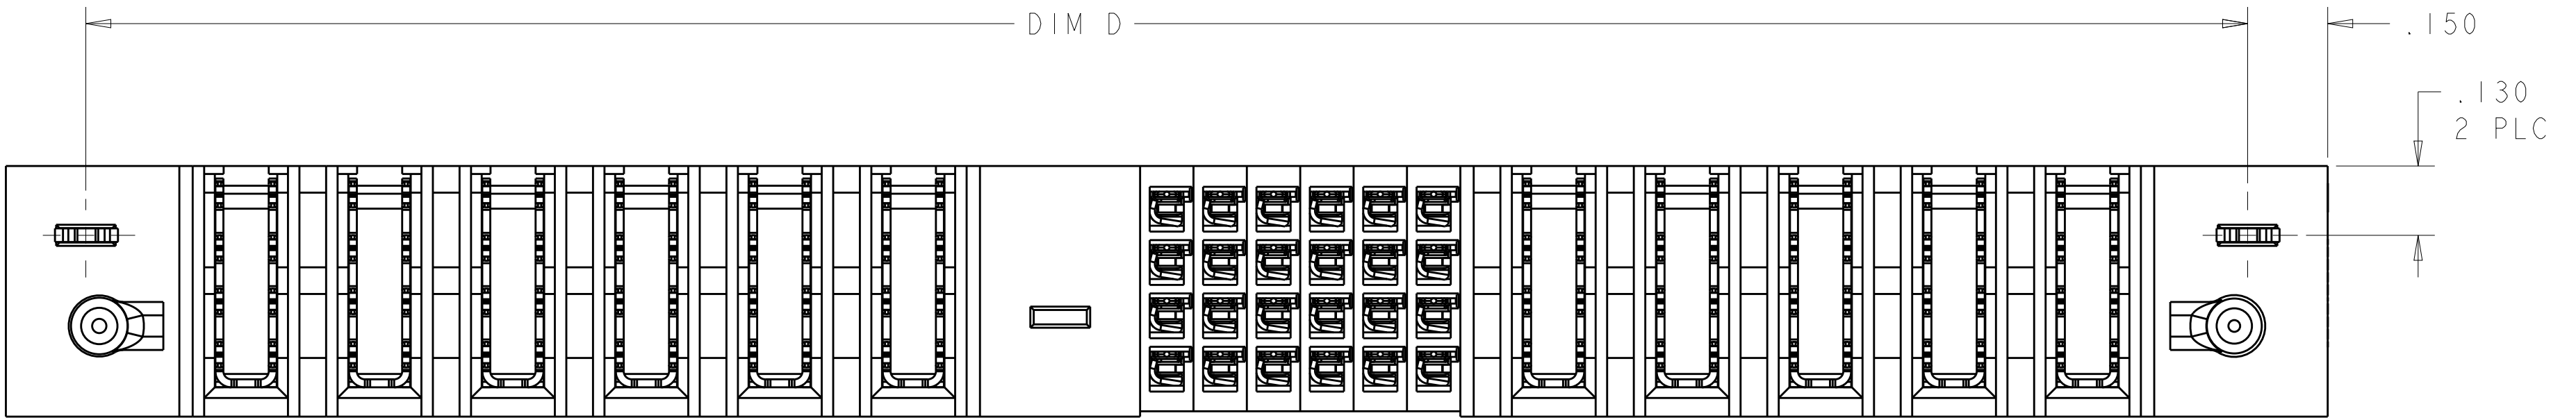


LOC		DIST		REVISIONS				
ES	00	P	LYR	DESCRIPTION	DATE	DWN	APVD	
		K9		REV PER ECR-12-018831	30OCT2012	AY	SZ	



- 1 OPTIONAL CENTER MODULE, WITH Ø.150 THRU HOLE OR HOLD DOWN FEATURE
- 2 "AMP", PART NUMBER AND DATE CODE TO BE MARKED IN AREA SHOWN
PARTS UNDER 2.00 LONG MAY BE MARKED ON BOTH SIDES
- 3 MATERIAL: HOUSING - GLASS FILLED HIGH TEMP THERMO PLASTIC, UL94 V-O
SIGNAL CONTACT - HIGH CONDUCTIVITY COPPER ALLOY
POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY
- 4 CONTACT PLATING: NOBLE METAL PLATING ON CONTACT FUNCTIONAL AREA
OF POWER CONTACTS AND SIGNAL CONTACTS.
- 5 MECHANICAL CONNECTOR KEEP OUT ZONE
- 6 DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER
- 7 PCB - ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES
- 8 PCB - 0.0453 ±.0010 DRILLED HOLES PLATED WITH .0003 MIN Sn
OVER .001 TO .003 Cu PLATING TO ACHIEVE A .040 HOLE
- 9 VARIABLE DIMENSION SHOWN VIEW (SHEET 6)


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R.GRZYBOWSKI 29APR05	TE Connectivity	VERTICAL RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL		
DIMENSIONS: INCHES		CHK M.PERCHERKE 29APR05				
		APVD W.PERCHERKE	NAME	SIZE	CAGE CODE	DRAWING NO
		PRODUCT SPEC		A1	00779	6450540
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC		RESTRICTED TO		
0 PLC ±"		114-13038				
1 PLC ±.01		WEIGHT		SCALE	2:1	SHEET 1 OF 19
2 PLC ±.01		CUSTOMER DRAWING		REV	K9	
3 PLC ±.005						
4 PLC ±.0020						
ANGLES ±.2°						
FINISH						

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-

K9	1.350	1.300	-	-	1.200	.625	-	1.650	.450	1P + 20S + 1P	6-6450540-6
	2.550	2.500	.250	.250	1.650	1.375	-	2.85	.450	4P + 8S + 4P	6-6450540-5
	1.350	1.300	-	-	1.200	.625	-	1.650	.450	1P + 20S + 1P	6-6450540-2
	-	3.300	.200	.200	2.200	1.625	-	3.650	.450	6P + 20S + 6P	6-6450540-1
	2.950	2.900	.250	.250	2.050	1.375	-	3.250	.450	4P + 24S + 4P	6-6450540-0
	2.050	2.000	.250	.250	1.650	.925	-	2.350	.450	2P + 24S + 2P	5-6450540-9
	2.050	2.000	.250	.250	1.400	1.125	-	2.350	.450	3P + 8S + 3P	5-6450540-5
	2.500	2.450	.250	.250	1.850	1.375	-	2.800	.450	4P + 16S + 3P	5-6450540-4
	2.950	2.900	.250	.250	2.050	1.375	-	3.250	.450	4P + 24S + 4P	5-6450540-3
	1.350	1.300	-	-	1.200	.675	-	1.650	.450	1P + 16S + 1P	5-6450540-2
	1.750	1.700	.250	.250	1.350	.875	-	2.050	.450	2P + 16S + 2P	5-6450540-1
	5.950	5.900	.250	.250	3.550	2.8750	-	6.250	.450	10P + 24S + 10P	5-6450540-0
	5.150	5.100	.250	.250	3.250	2.375	-	5.450	.450	8P + 32S + 8P	4-6450540-9
	1.250	1.200	-	-	1.100	.625	-	1.550	.450	1P + 16S + 1P	4-6450540-8
	2.150	2.100	.250	.250	1.500	1.175	-	2.450	.450	3P + 8S + 3P	4-6450540-7
	1.150	1.100	-	-	1.000	.675	-	1.450	.450	1P + 8S + 1P	4-6450540-6
	-	-	-	.200	-	-	-	2.820	.450	12HDP	4-6450540-5
	-	-	.200	.200	2.600	1.625	-	3.970	.450	6HDP + 36S + 7HDP	4-6450540-4
	2.65	2.60	.250	.250	2.250	1.625	-	2.950	.450	5P + 20S + 2P	(E)4-6450540-3
	-	-	-	.200	-	-	-	2.620	.450	11HDP	(E)4-6450540-2
	-	-	.200	.200	2.600	1.625	-	3.770	.450	6P + 36S + 6P	4-6450540-1
	-	-	.200	.200	4.500	3.425	-	7.470	.450	15P + 40S + 15P	4-6450540-0
	-	-	.200	.200	-	-	-	7.470	-	15P + 40S + 15P	(D)3-6450540-9
	4.650	4.600	.250	.250	3.250	1.875	-	4.950	.450	6P + 52S + 6P	(D)2-6450540-7
	1.950	1.900	-	-	1.550	.875	-	2.250	.450	2P + 24S + 2P	(D)2-6450540-5
	2.450	2.400	.250	.250	1.800	1.125	-	2.750	.450	3P + 24S + 3P	(D)2-6450540-0
	-	1.575	-	-	1.425	.700	-	1.925	.475	1P + 24S + 1P	(E)1-6450540-8
	-	5.450			3.075	2.425	-	5.800	.425	10P + 24S + 12P	1-6450540-4
	3.250	3.200	.200	.200	2.125	1.575	-	3.550	.425	6P + 20S + 6P	1-6450540-2
	-	2.850	.250	.250	2.000	1.125	-	3.200	.450	3P + 32S + 4P	1-6450540-1
	1.950	1.900	.250	.250	1.550	.875	-	2.250	.450	2P + 24S + 2P	1-6450540-0
	-	1.400	.250	.250	1.300	.625	-	1.750	.450	1P + 24S + 1P	6450540-7
	-	2.400	.250	.250	2.050	1.375	-	2.750	.450	4P + 24S + 2P	6450540-6
	-	3.100	.250	.250	2.000	1.625	-	3.450	.450	5P + 12S + 5P	6450540-5
	-	3.400	.250	.250	2.050	1.375	-	3.750	.450	4P + 24S + 6P	6450540-4
	-	7.400	.250	.250	5.050	2.875	-	7.750	.450	10P + 84S + 10P	6450540-3
	-	4.000	.250	.250	2.650	1.675	2.225	4.350	.450	5P+24S+1M+6P	6450540-2
	-	1.575	-	-	1.425	.700	-	1.925	.475	1P + 24S + 1P	6450540-1
	D	U	T	S	R	W	M	L	K	DESCRIPTION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.
TOLERANCES UNLESS OTHERWISE SPECIFIED:

DIMENSIONS:
INCHES



MATERIAL

0 PLC ±.1
1 PLC ±.01
2 PLC ±.005
3 PLC ±.005
4 PLC ±.0020
ANGLES ±.2°
FINISH

DWN
R. GRZYBOWSKI
CHK
M. PERCHERKE
APVD
M. PERCHERKE

29APR05
29APR05

PRODUCT SPEC
108-1973
APPLICATION SPEC
114-13038
WEIGHT
-

CUSTOMER DRAWING

NAME
VERTICAL RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL

SIZE
A1

CAGE CODE
100779

DRAWING NO
6450540

RESTRICTED TO
-

SCALE
2:1

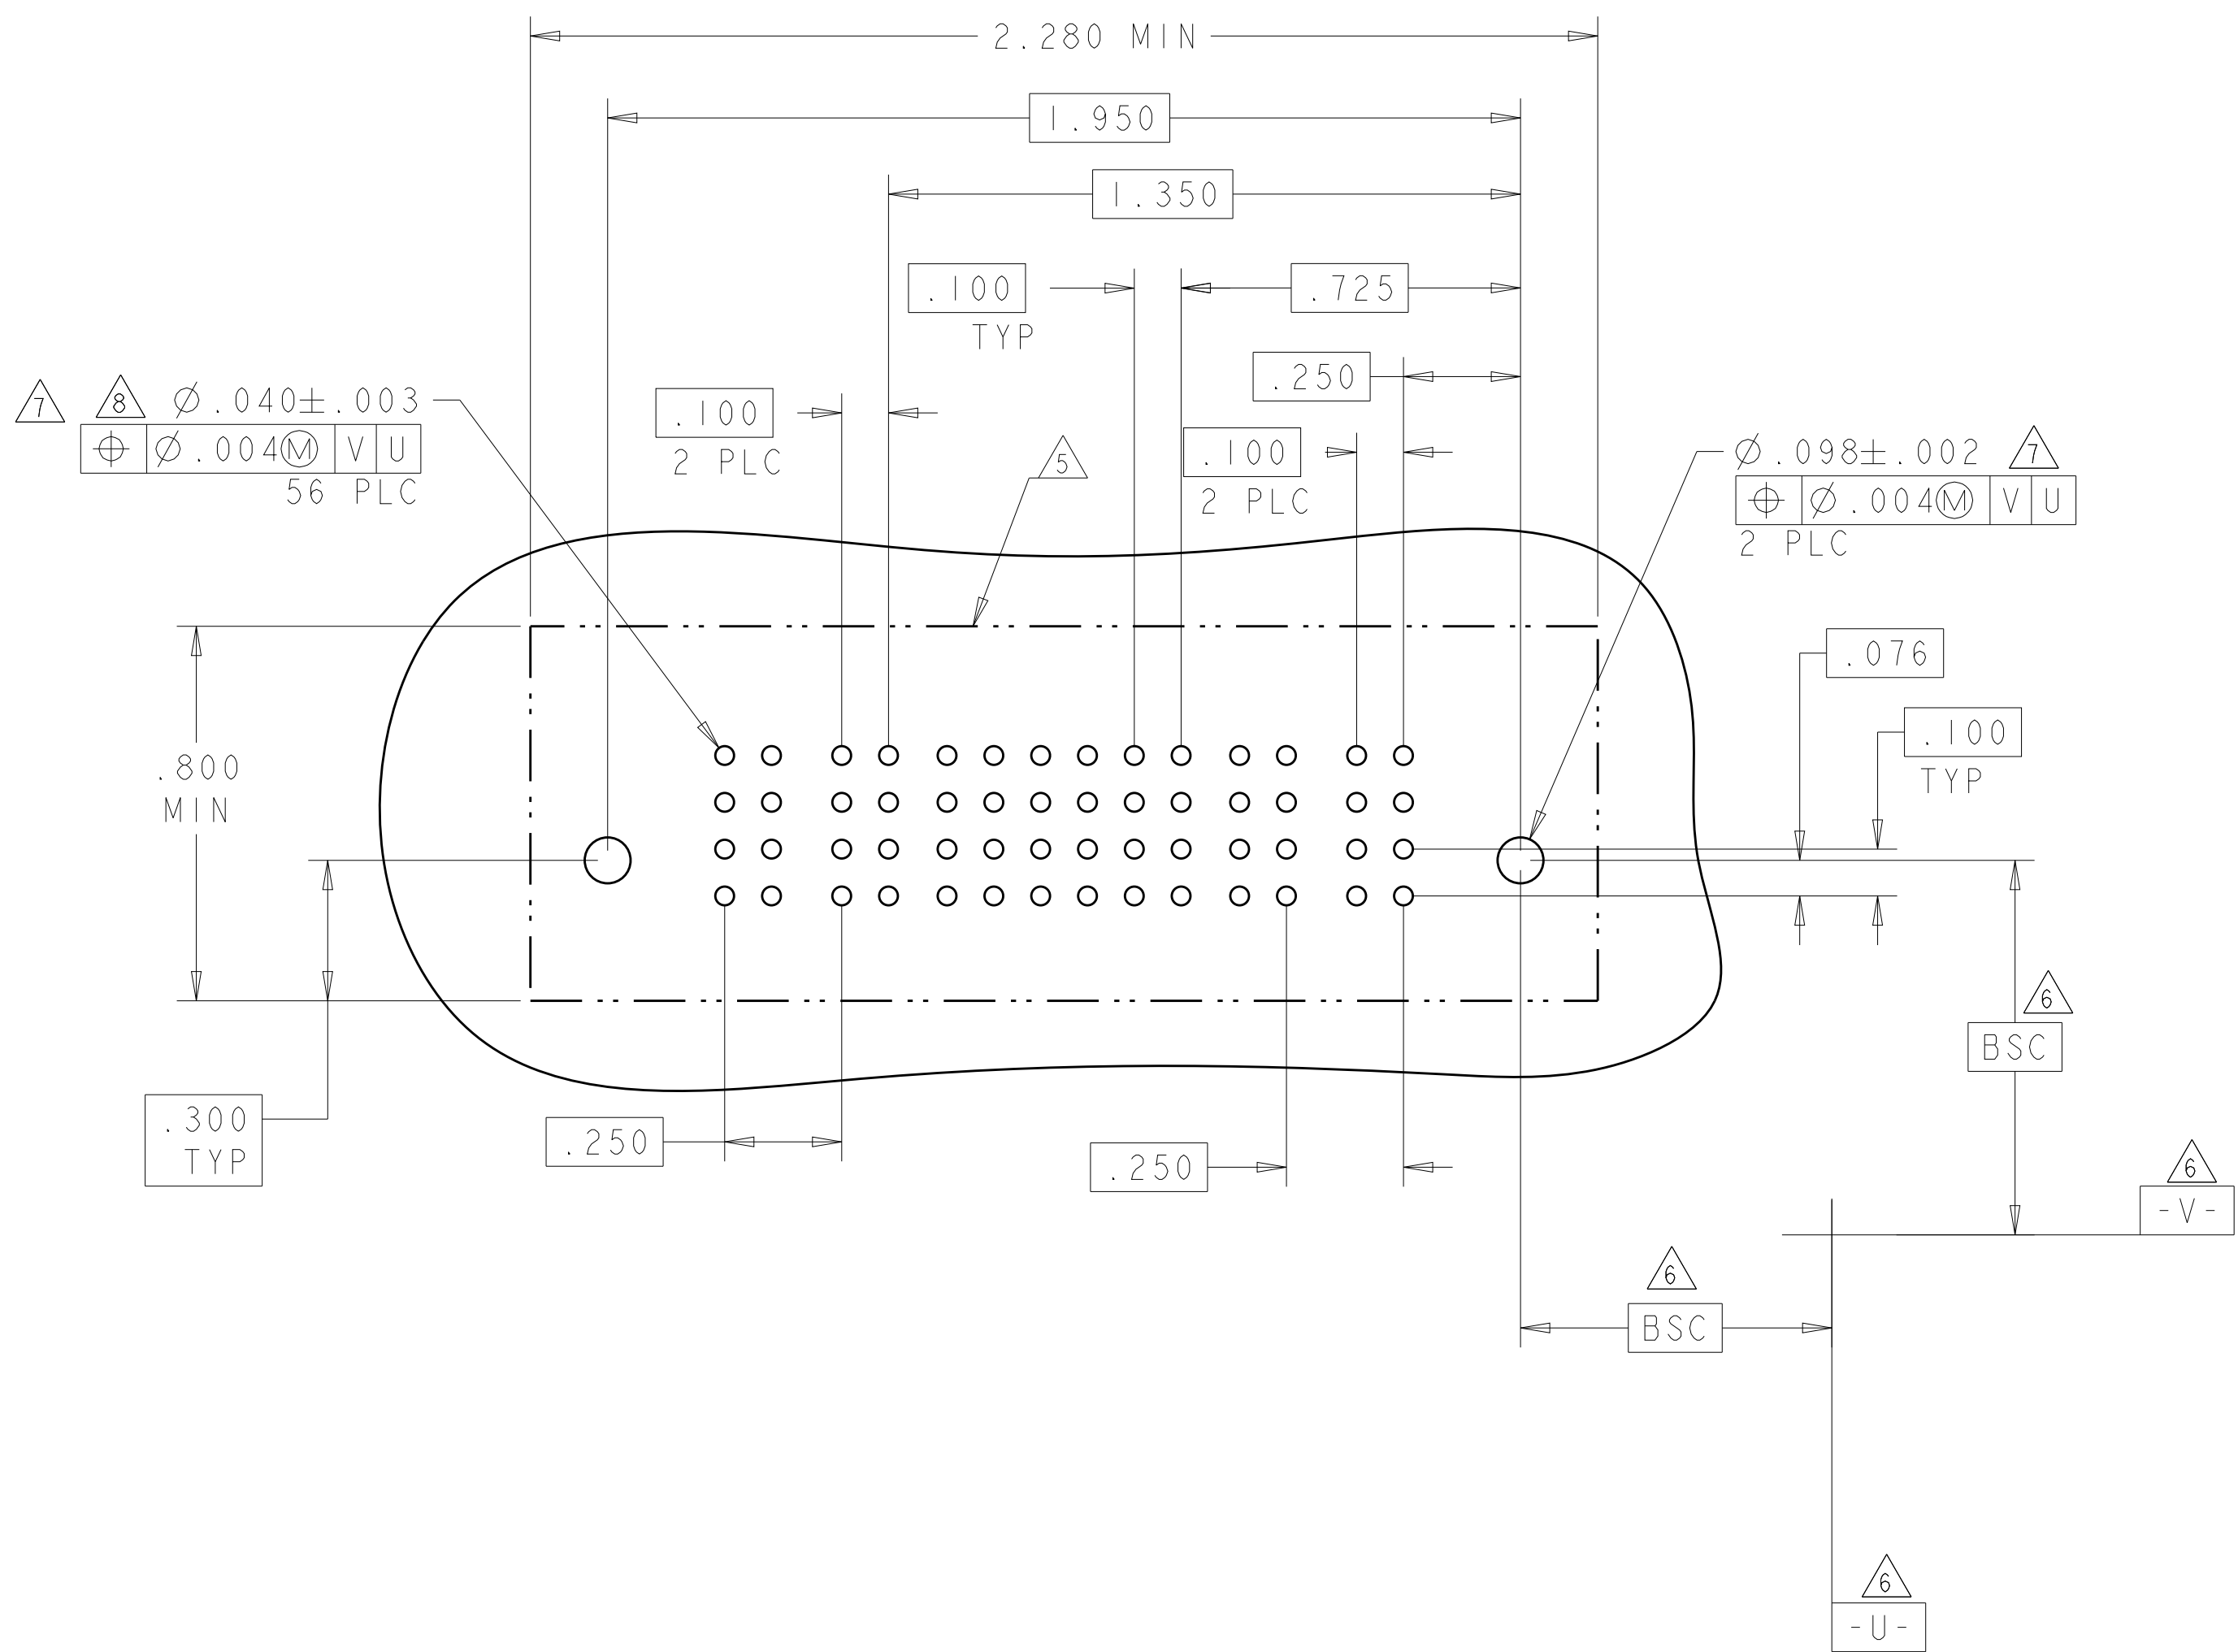
SHEET
2

OF
19

REV
K9

4805 (3/11)

PART NUMBER	ROWS		POWER		SIGNAL						POWER				
			P4	P3	6	5	4	3	2	1	P2	P1			
2-6450540-5	D C B A				AP	AP	AP	AP	AP	AP	AP				
					AP	AP	AP	AP	AP	AP	AP				
					AP	AP	AP	AP	AP	AP	AP				
					AP	AP	AP	AP	AP	AP	AP				
2P + 24S + 2P															

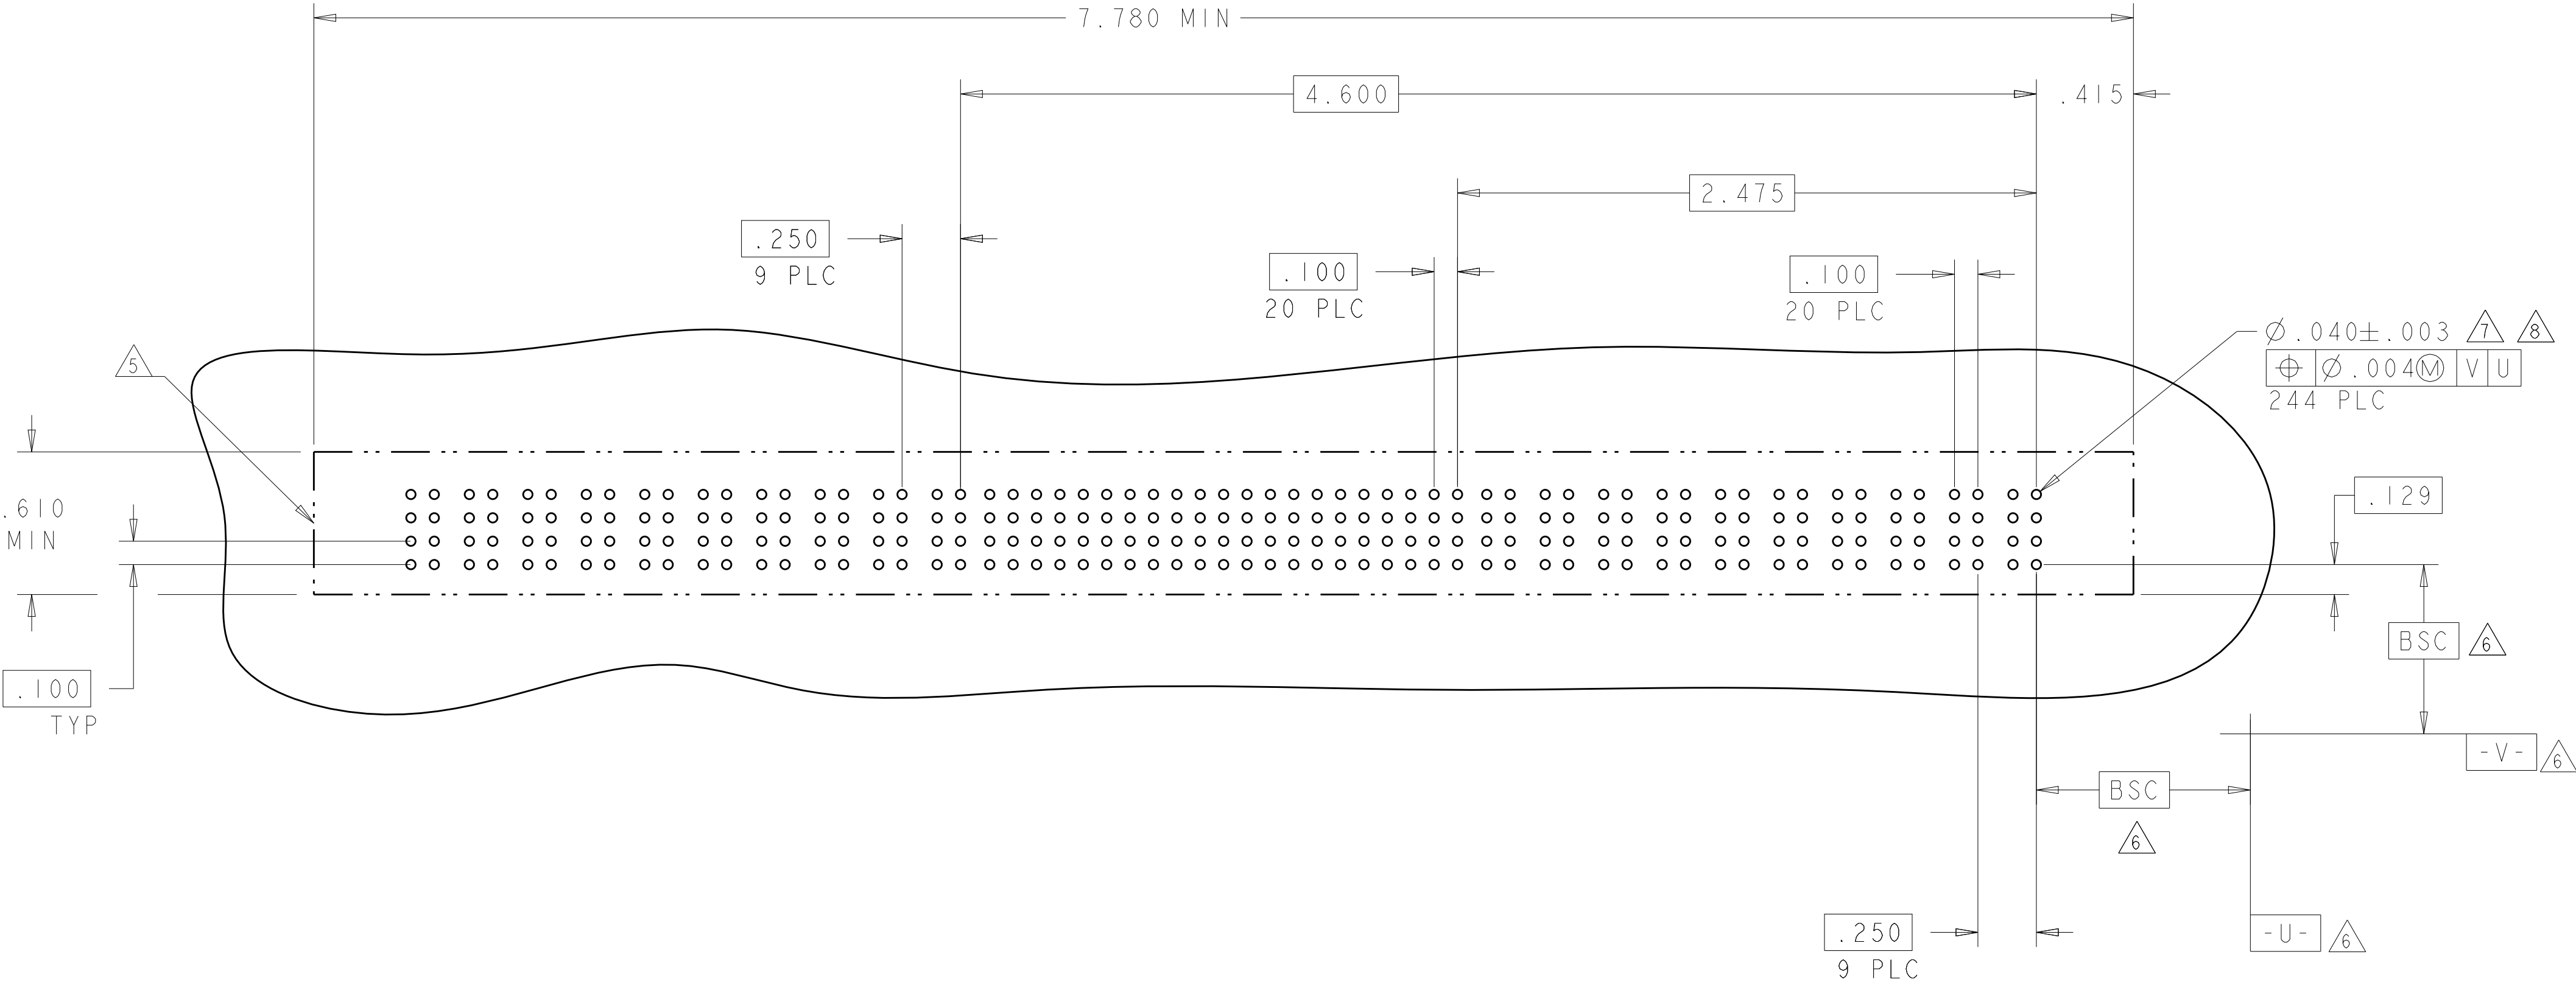


VS	STD POWER PRESSFIT CONTACT .115 LG
VP	MFBL POWER PRESSFIT CONTACT .115 LG
GS	STD POWER PRESSFIT CONTACT .135 LG
GP	MFBL POWER PRESSFIT CONTACT .135 LG
P	SIGNAL PRESSFIT CONTACT .115 LG
AP	SIGNAL PRESSFIT CONTACT .135 LG
CODE	TAIL LENGTH

4805 (3/11)











LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-

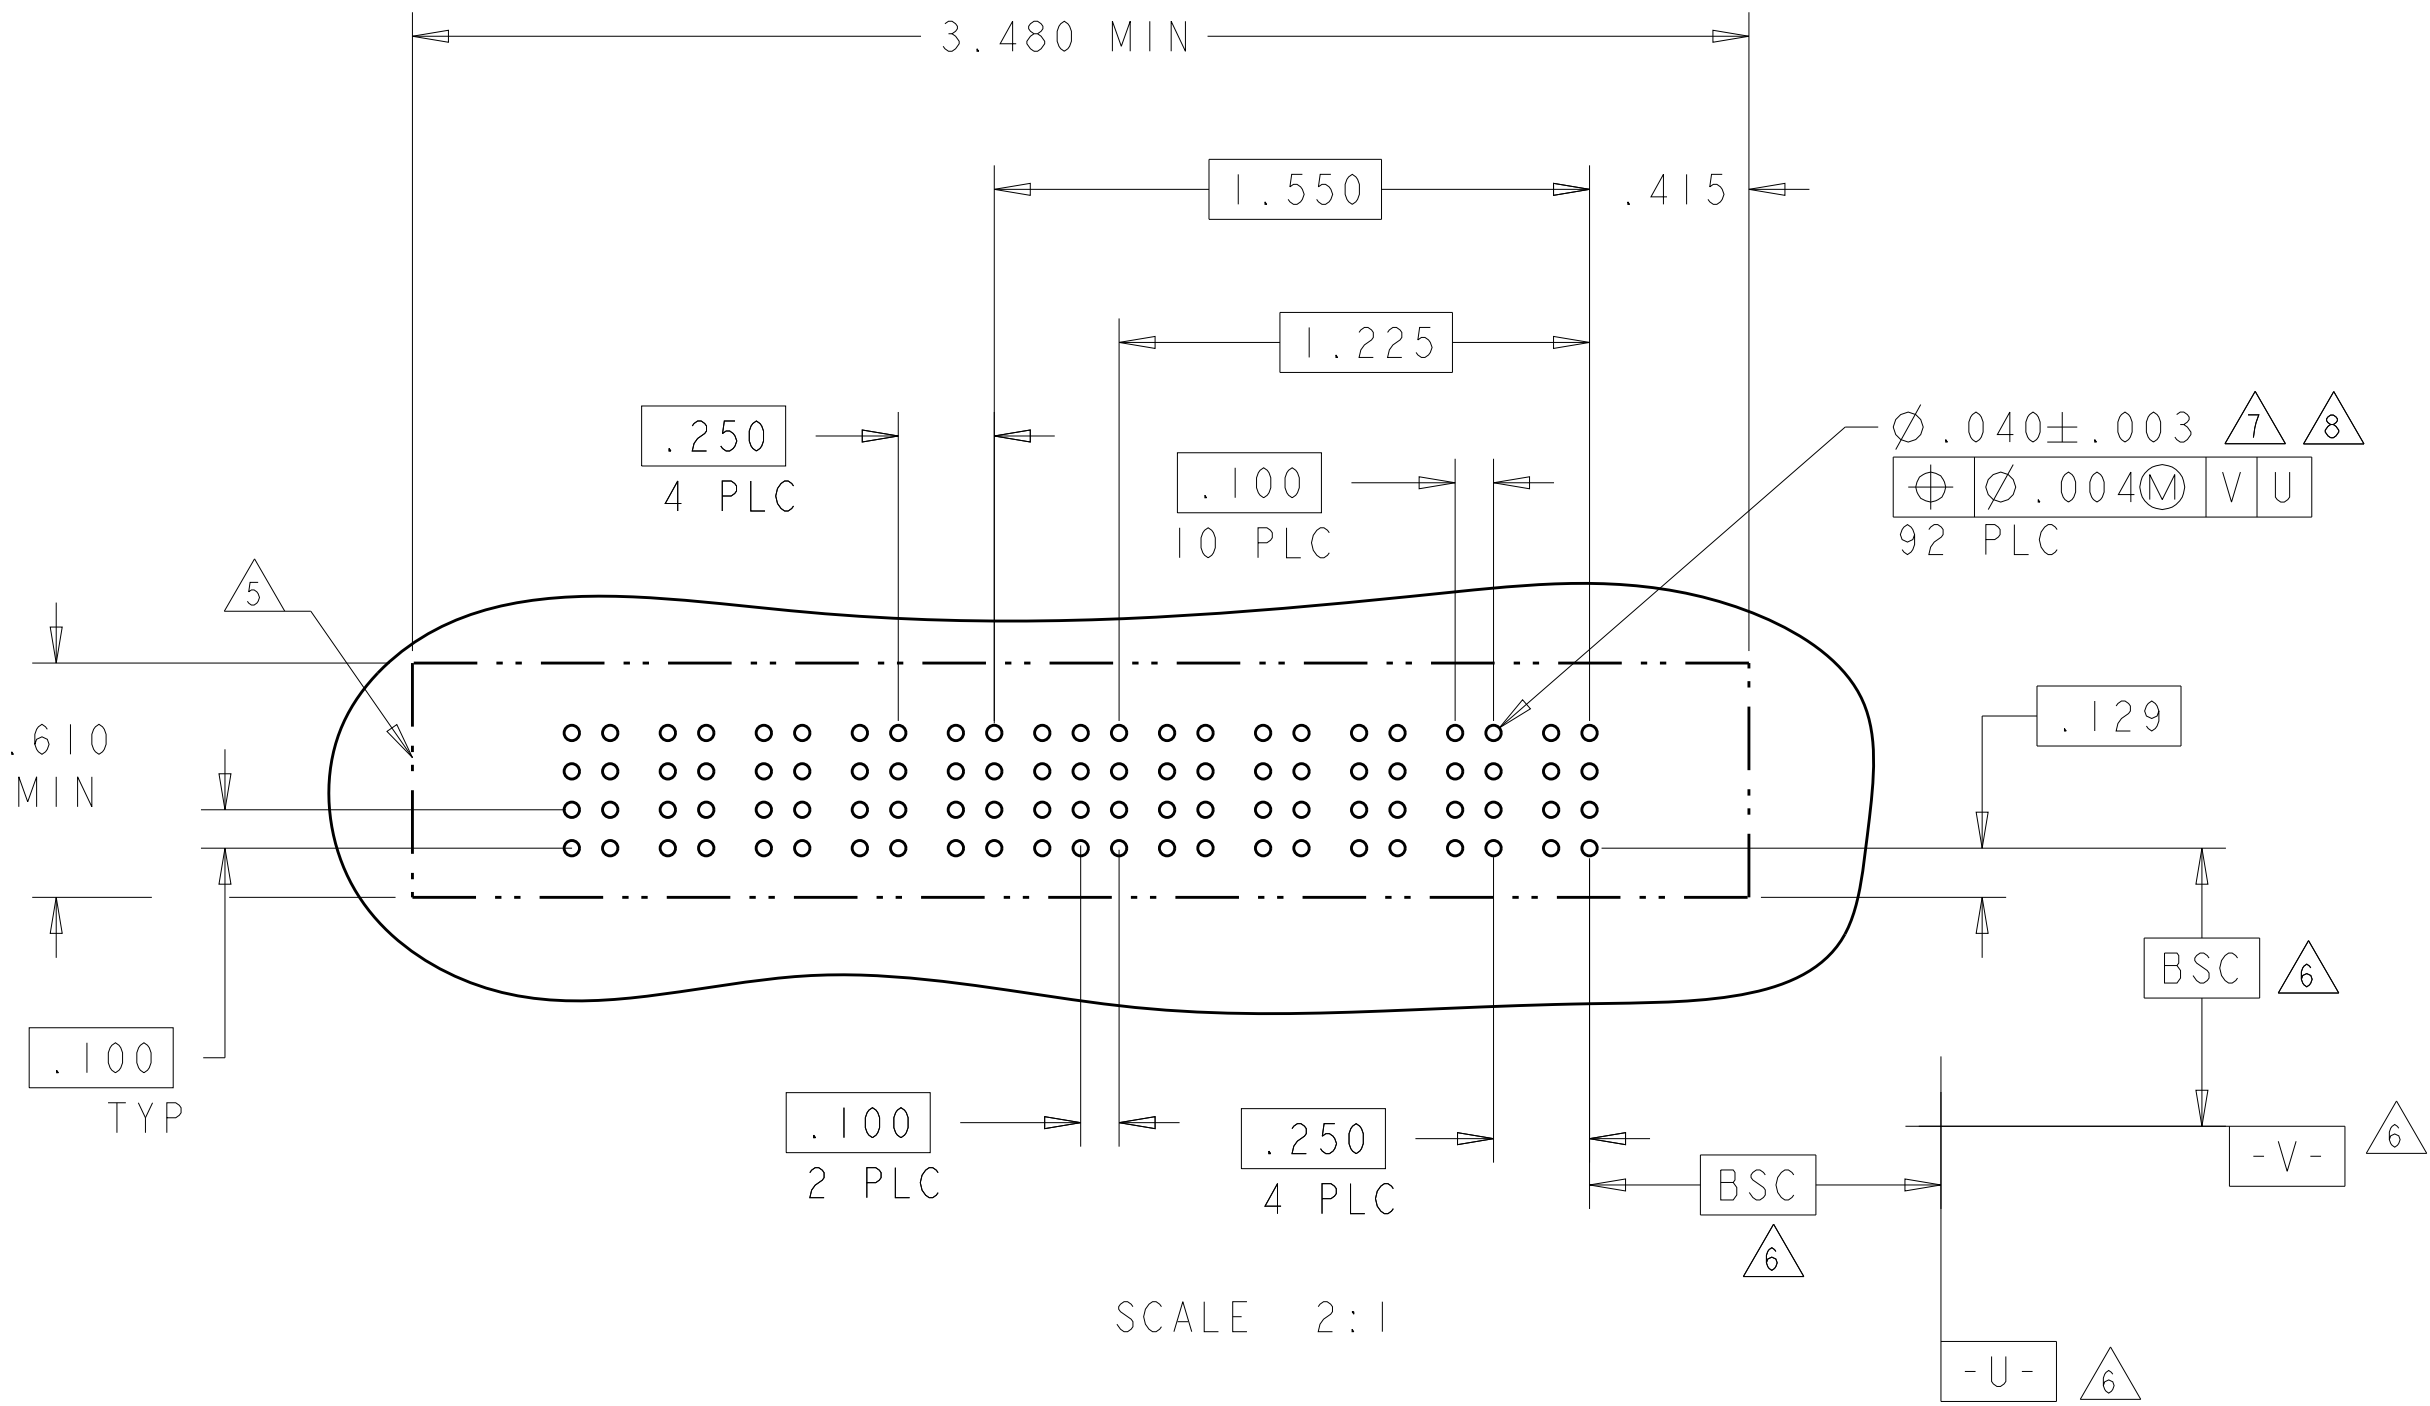
PART NUMBER	ROWS		POWER										SIGNAL																				POWER											
			P20	P19	P18	P17	P16	P15	P14	P13	P12	P11	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	P10	P9	P8	P7	P6	P5	P4	P3	P2		P1
6450540-3	D C B A																																											
10P + 84S + 10P																																												




HP	MFBL POWER PRESSFIT CONTACT .165 LG
BP	SIGNAL PRESSFIT CONTACT .165 LG
GP	MFBL POWER PRESSFIT CONTACT .135 LG
AP	SIGNAL PRESSFIT CONTACT .135 LG
CODE	TAIL LENGTH
CONTACT TABLE	

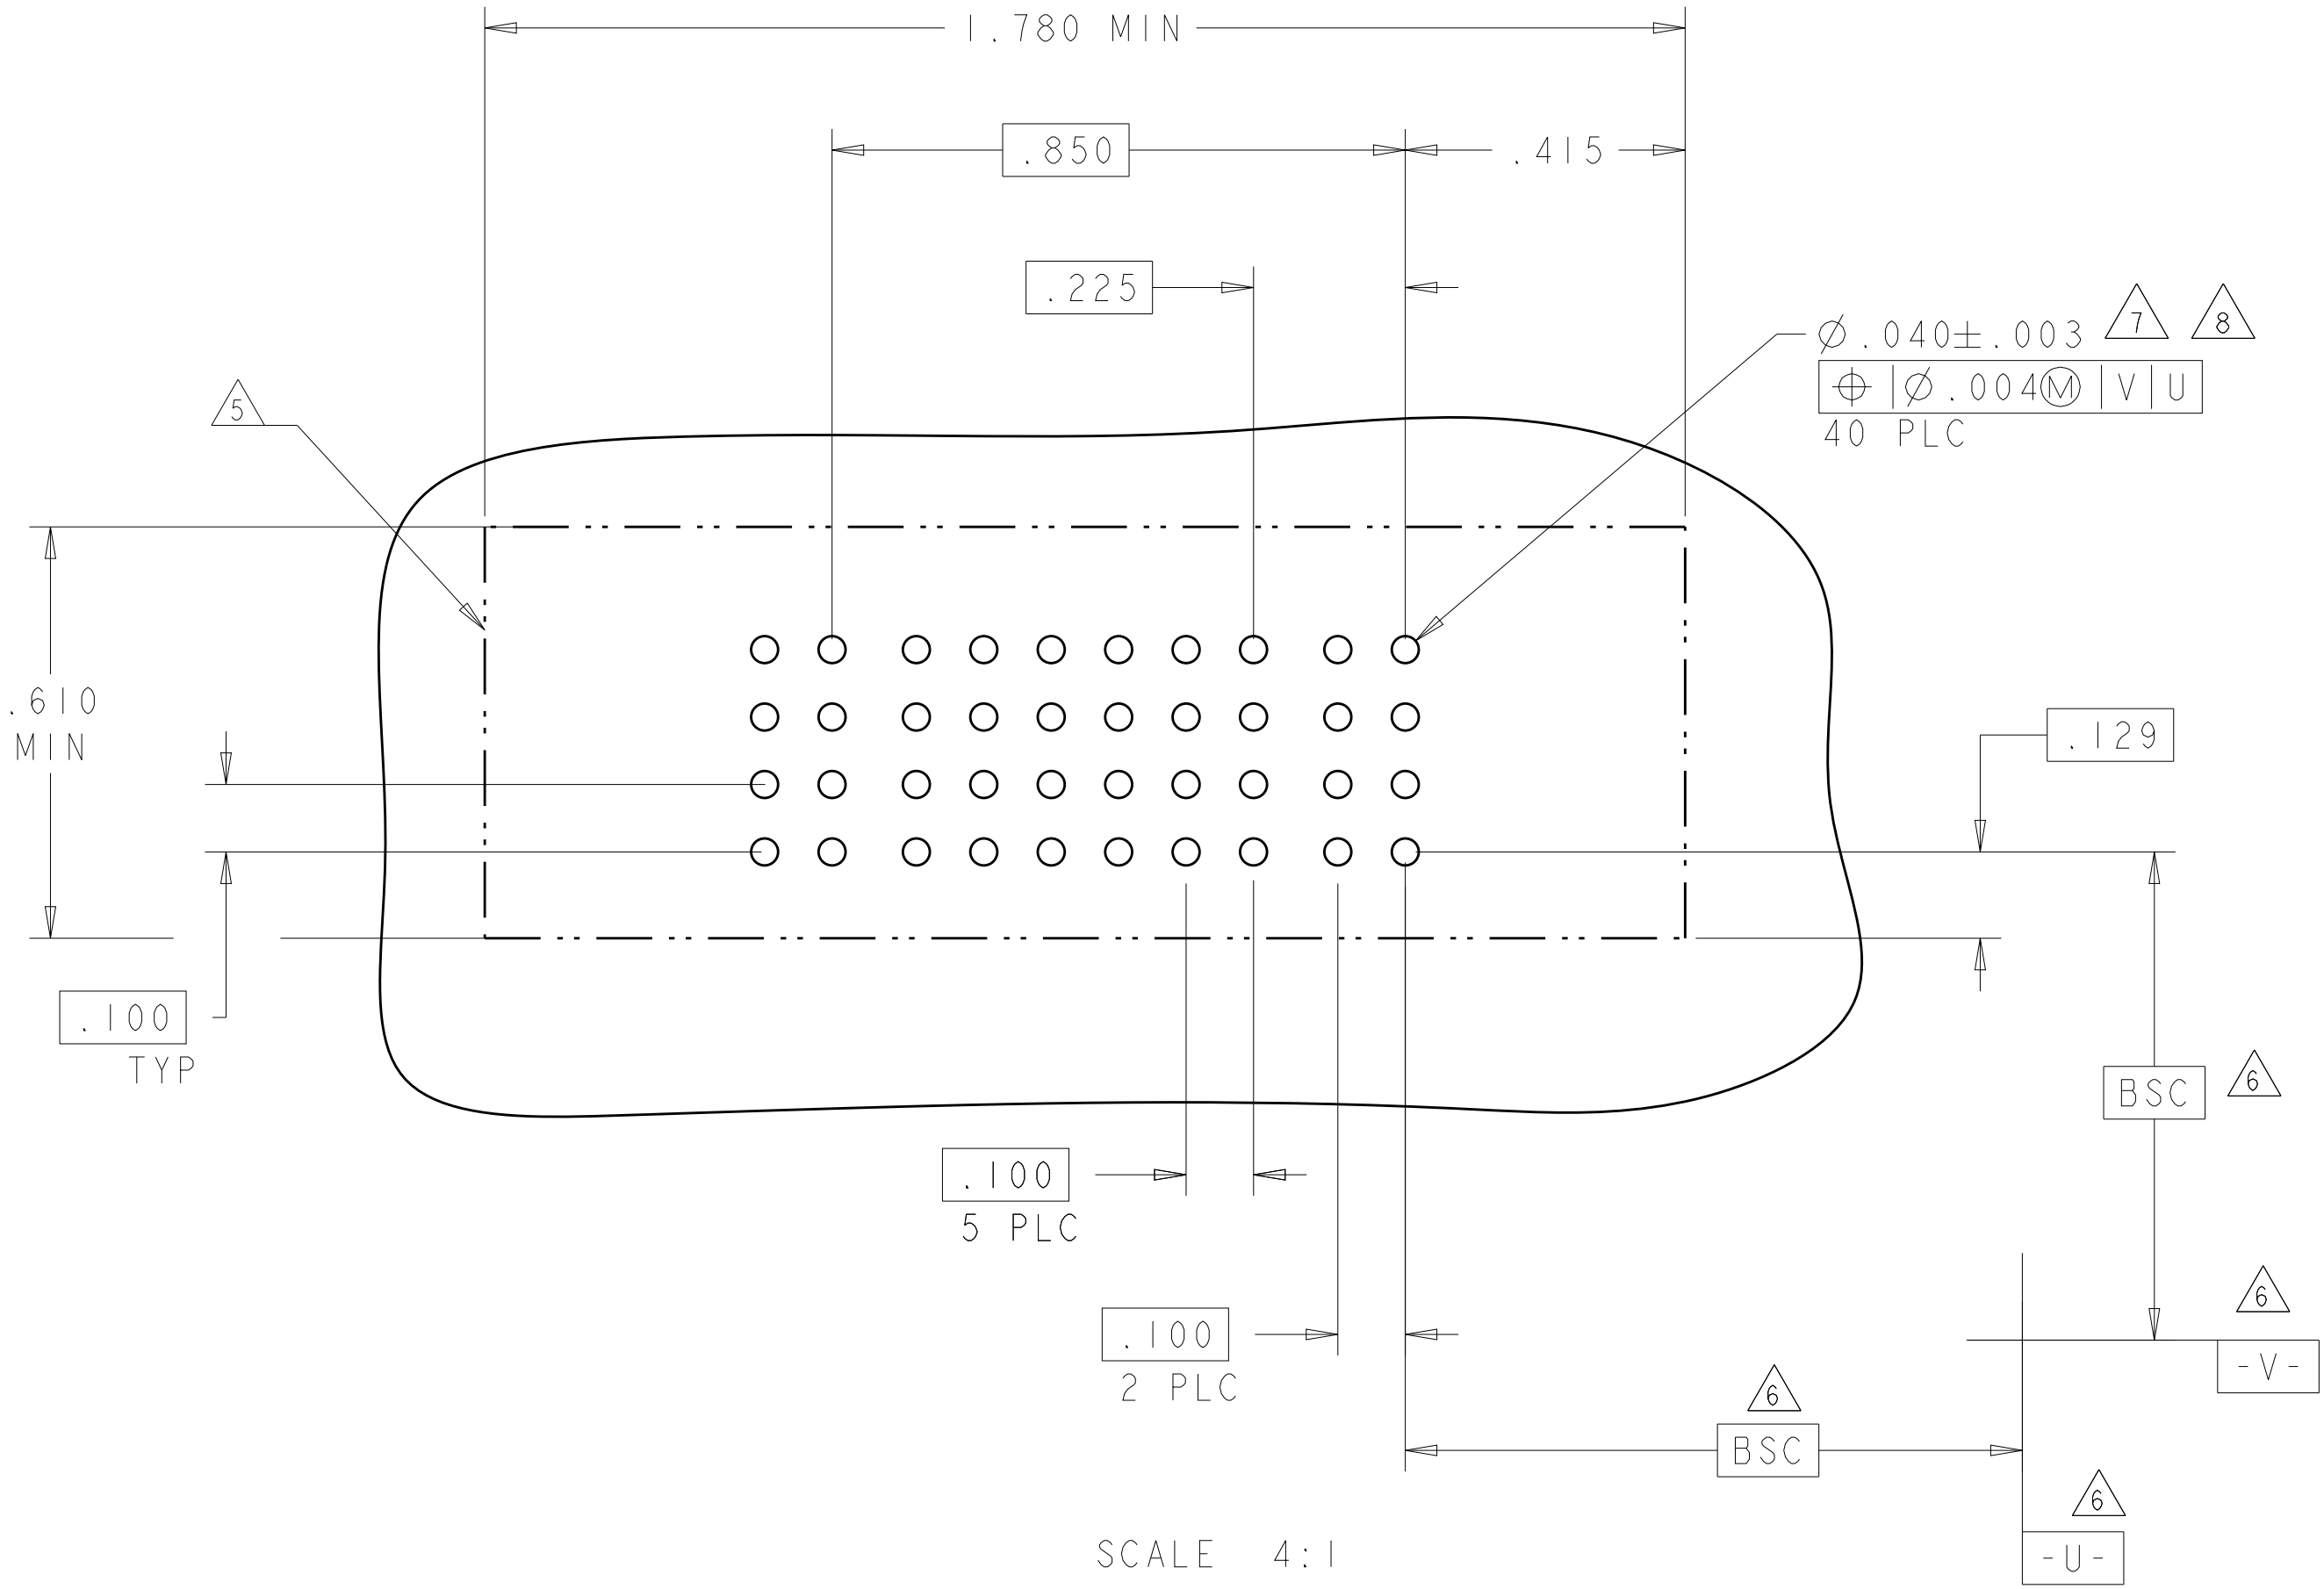
THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R.GRZYBOWSKI CHK M.PERCHEKKE APVD M.PERCHEKKE	29APR05 29APR05 -
DIMENSIONS: INCHES		PRODUCT SPEC	NAME
		108-1973	VERTICAL RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL
		APPLICATION SPEC	
MATERIAL		114-13038	SIZE
		FINISH	CAGE CODE
		WEIGHT	DRAWING NO
		CUSTOMER DRAWING	RESTRICTED TO
		SCALE 2:1	SHEET 4 OF 19
		REV K9	

PART NUMBER	ROWS		POWER					SIGNAL			POWER					
			P10	P9	P8	P7	P6	3	2	1	P5	P4	P3	P2	P1	
6450540-5	D C B A															
5P + 12S + 5P																



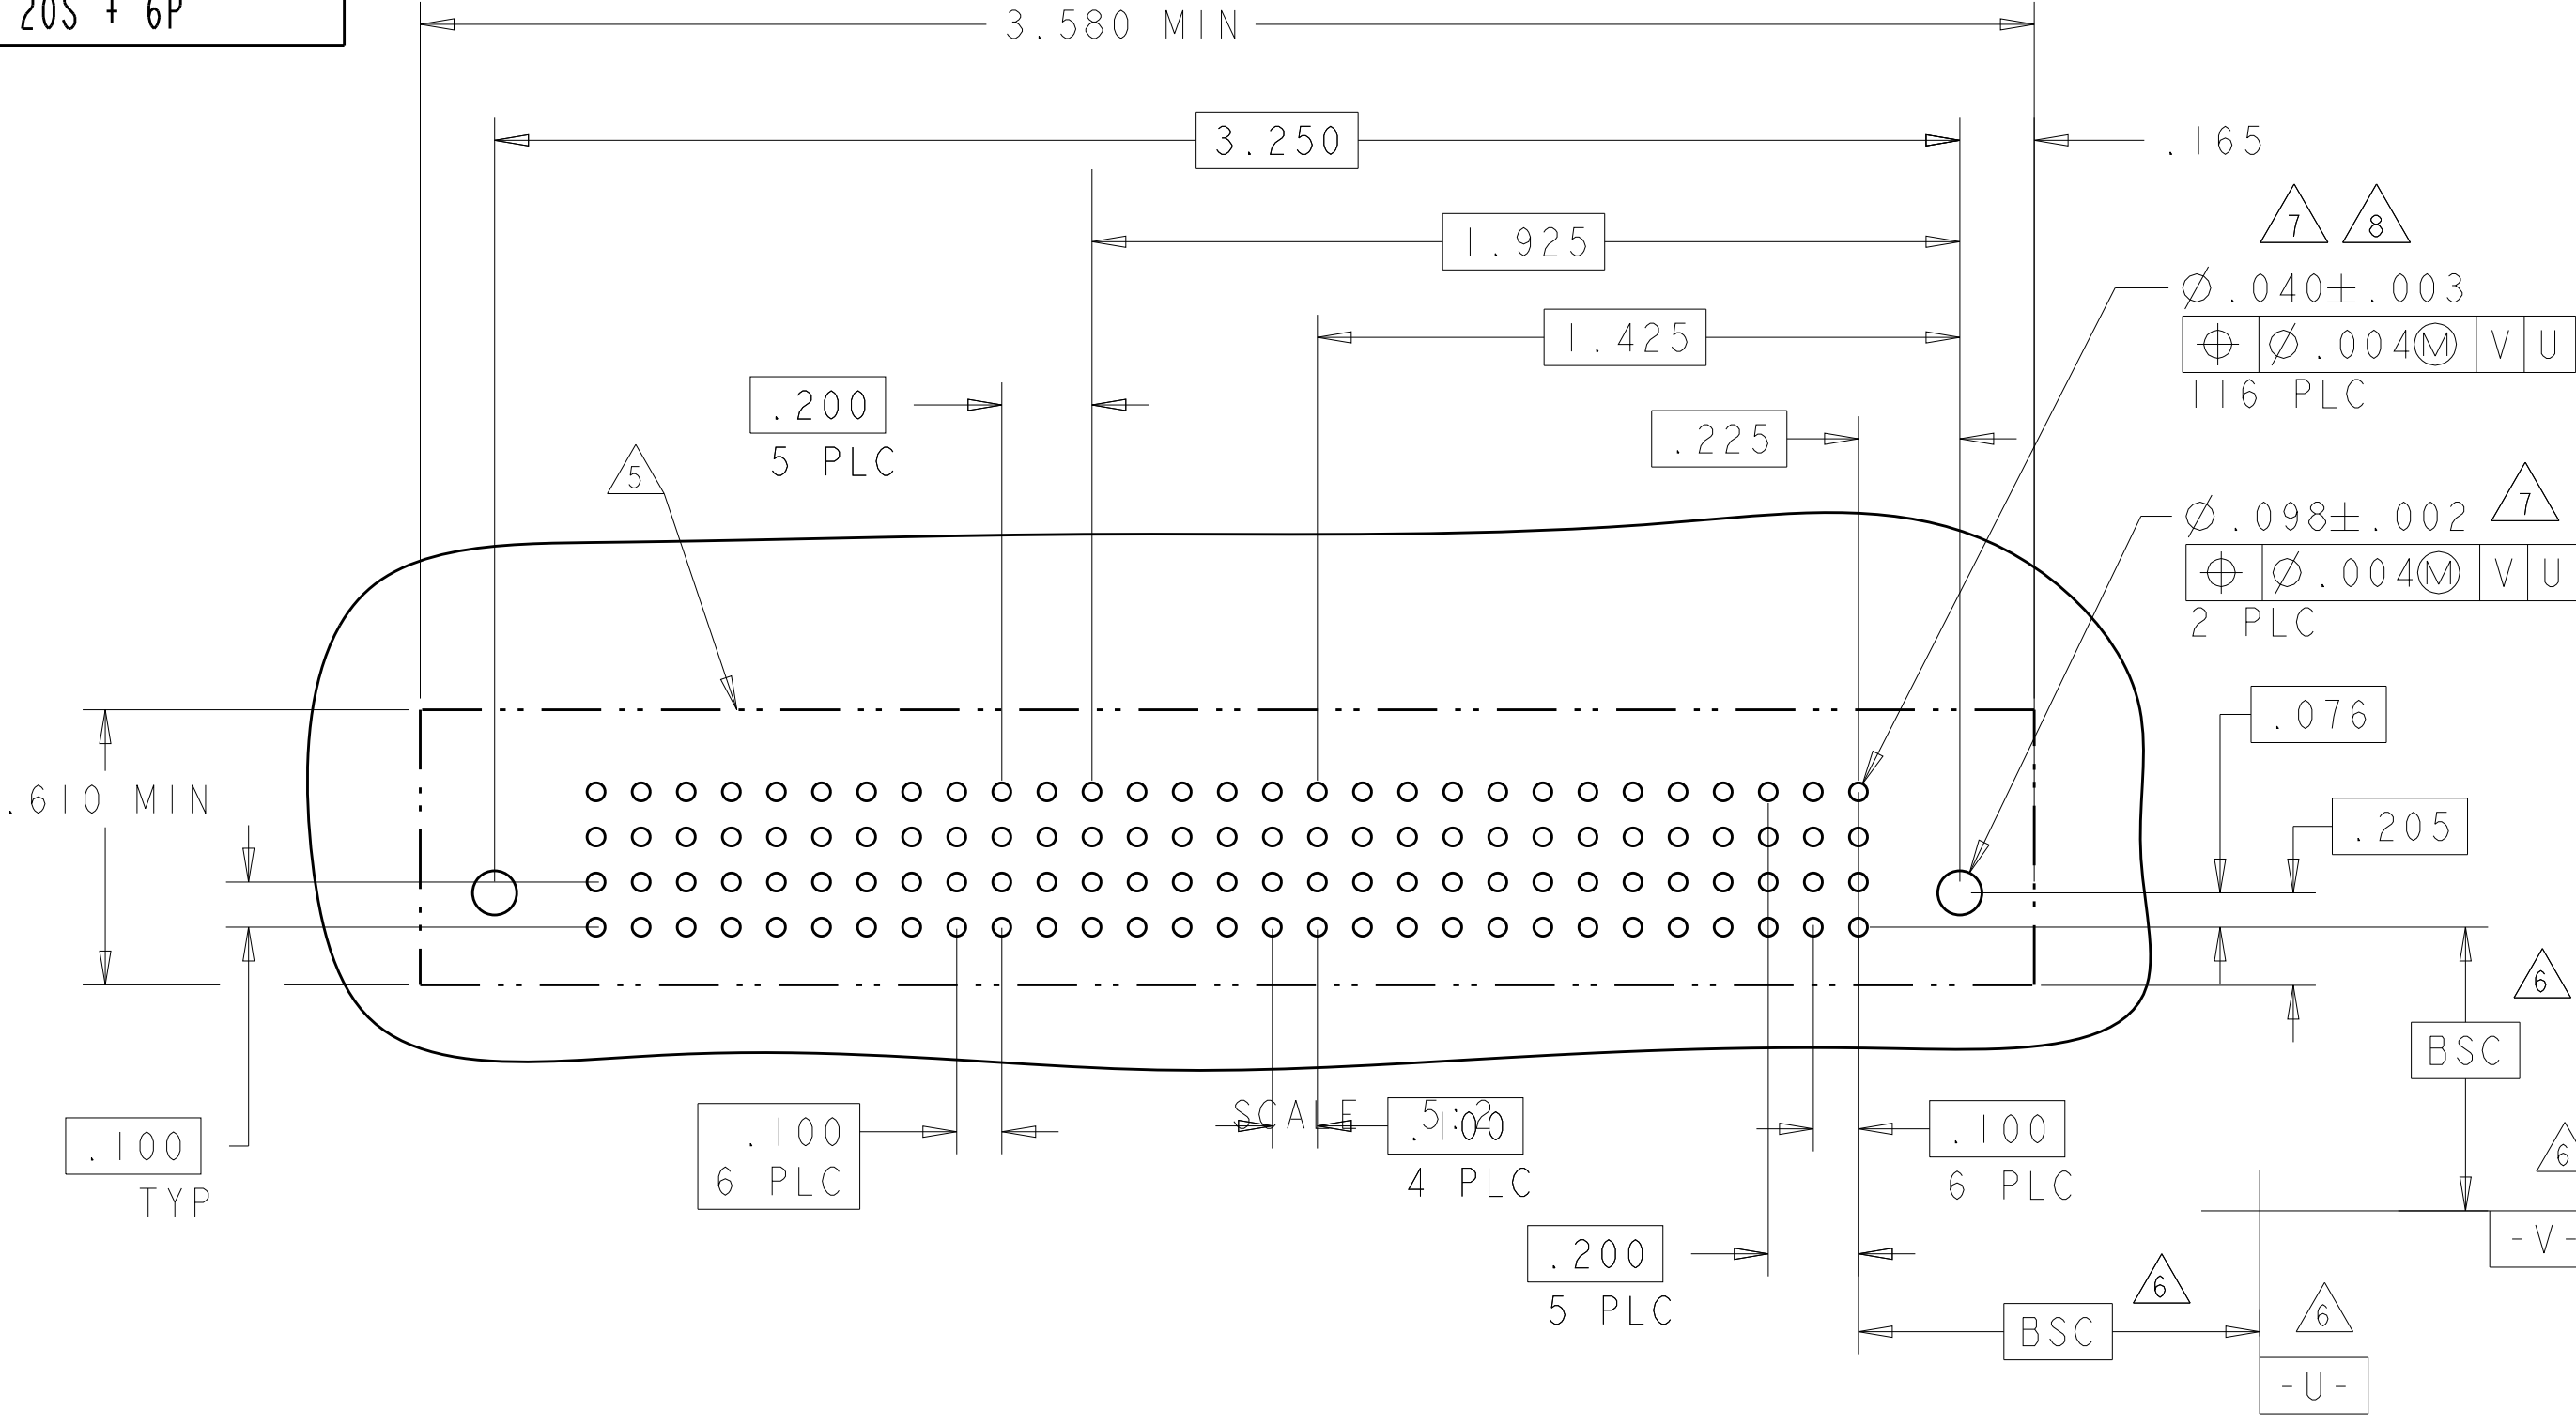
THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. GRZYBOWSKI 29APR05		 TE Connectivity	
DIMENSIONS:		CHW M. PERCHERKE 29APR05			
INCHES		APVD M. PERCHERKE -		NAME	
		PRODUCT SPEC		VERTICAL RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL	
		108-1973			
		APPLICATION SPEC			
		114-13038			
MATERIAL		WEIGHT -		SIZE CAGE CODE DRAWING NO	
FINISH		A		00779 © 6450540	
		CUSTOMER DRAWING		SCALE 2:1 SHEET 5 OF 19 REV K9	

PART NUMBER	ROWS		POWER	SIGNAL							POWER	
			P2	6	5	4	3	2	1	P1		
6450540-7	D C B A		GP	AP	AP	AP	AP	AP	AP	AP	GP	
IP + 24S + IP												

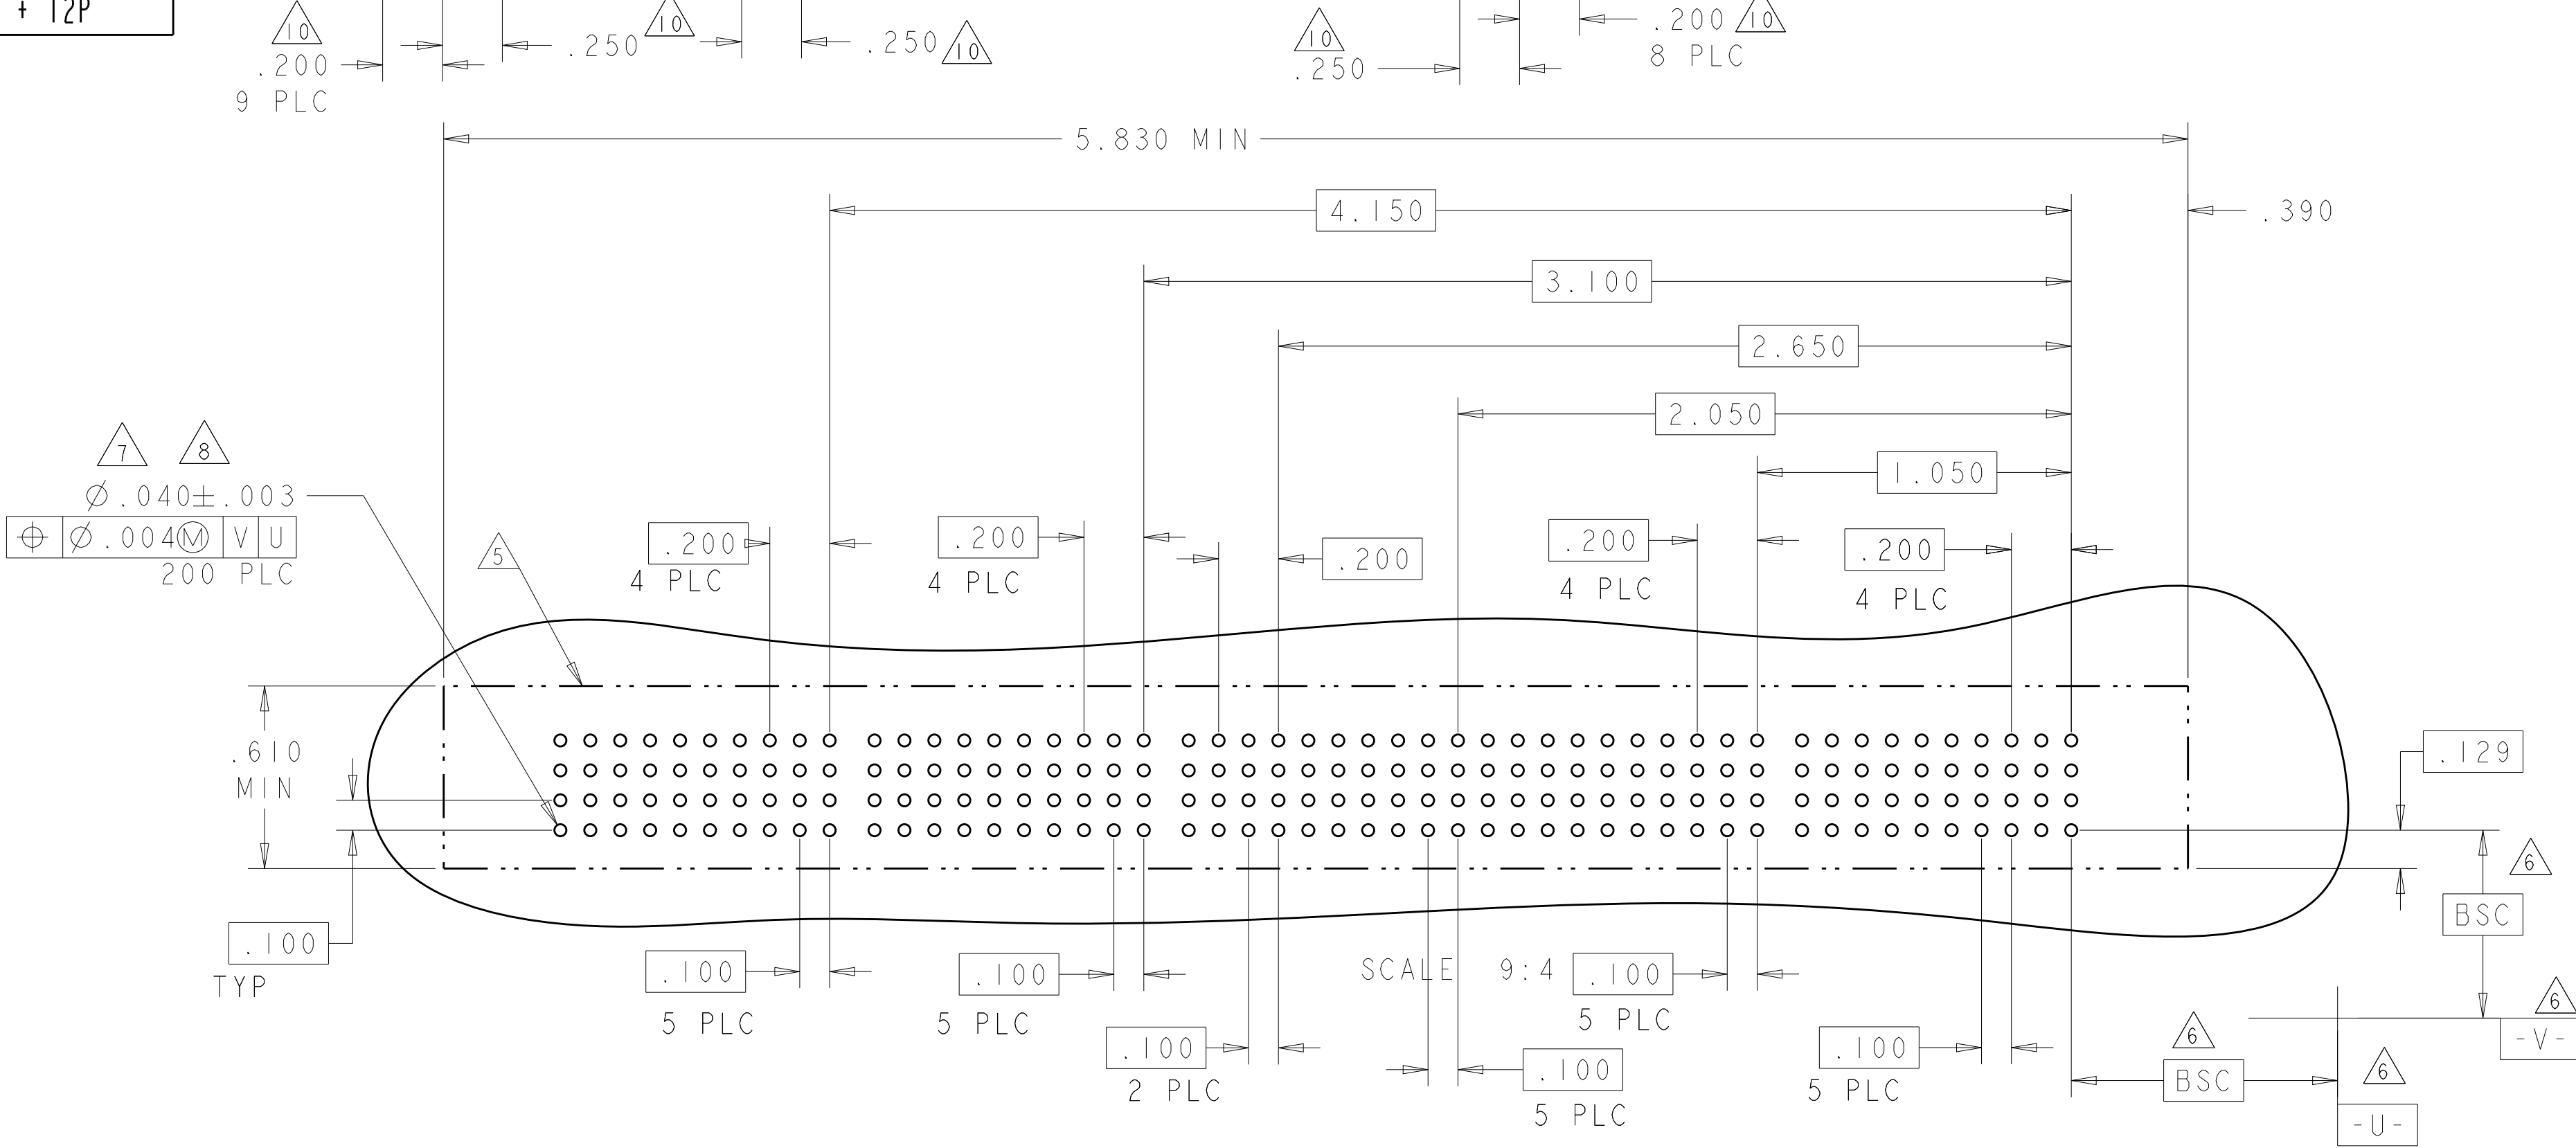


LOC	DIST	REVISIONS				
		P	LYR	DESCRIPTION	DATE	OWN
ES	00	-	-	SEE SHEET 1	-	-

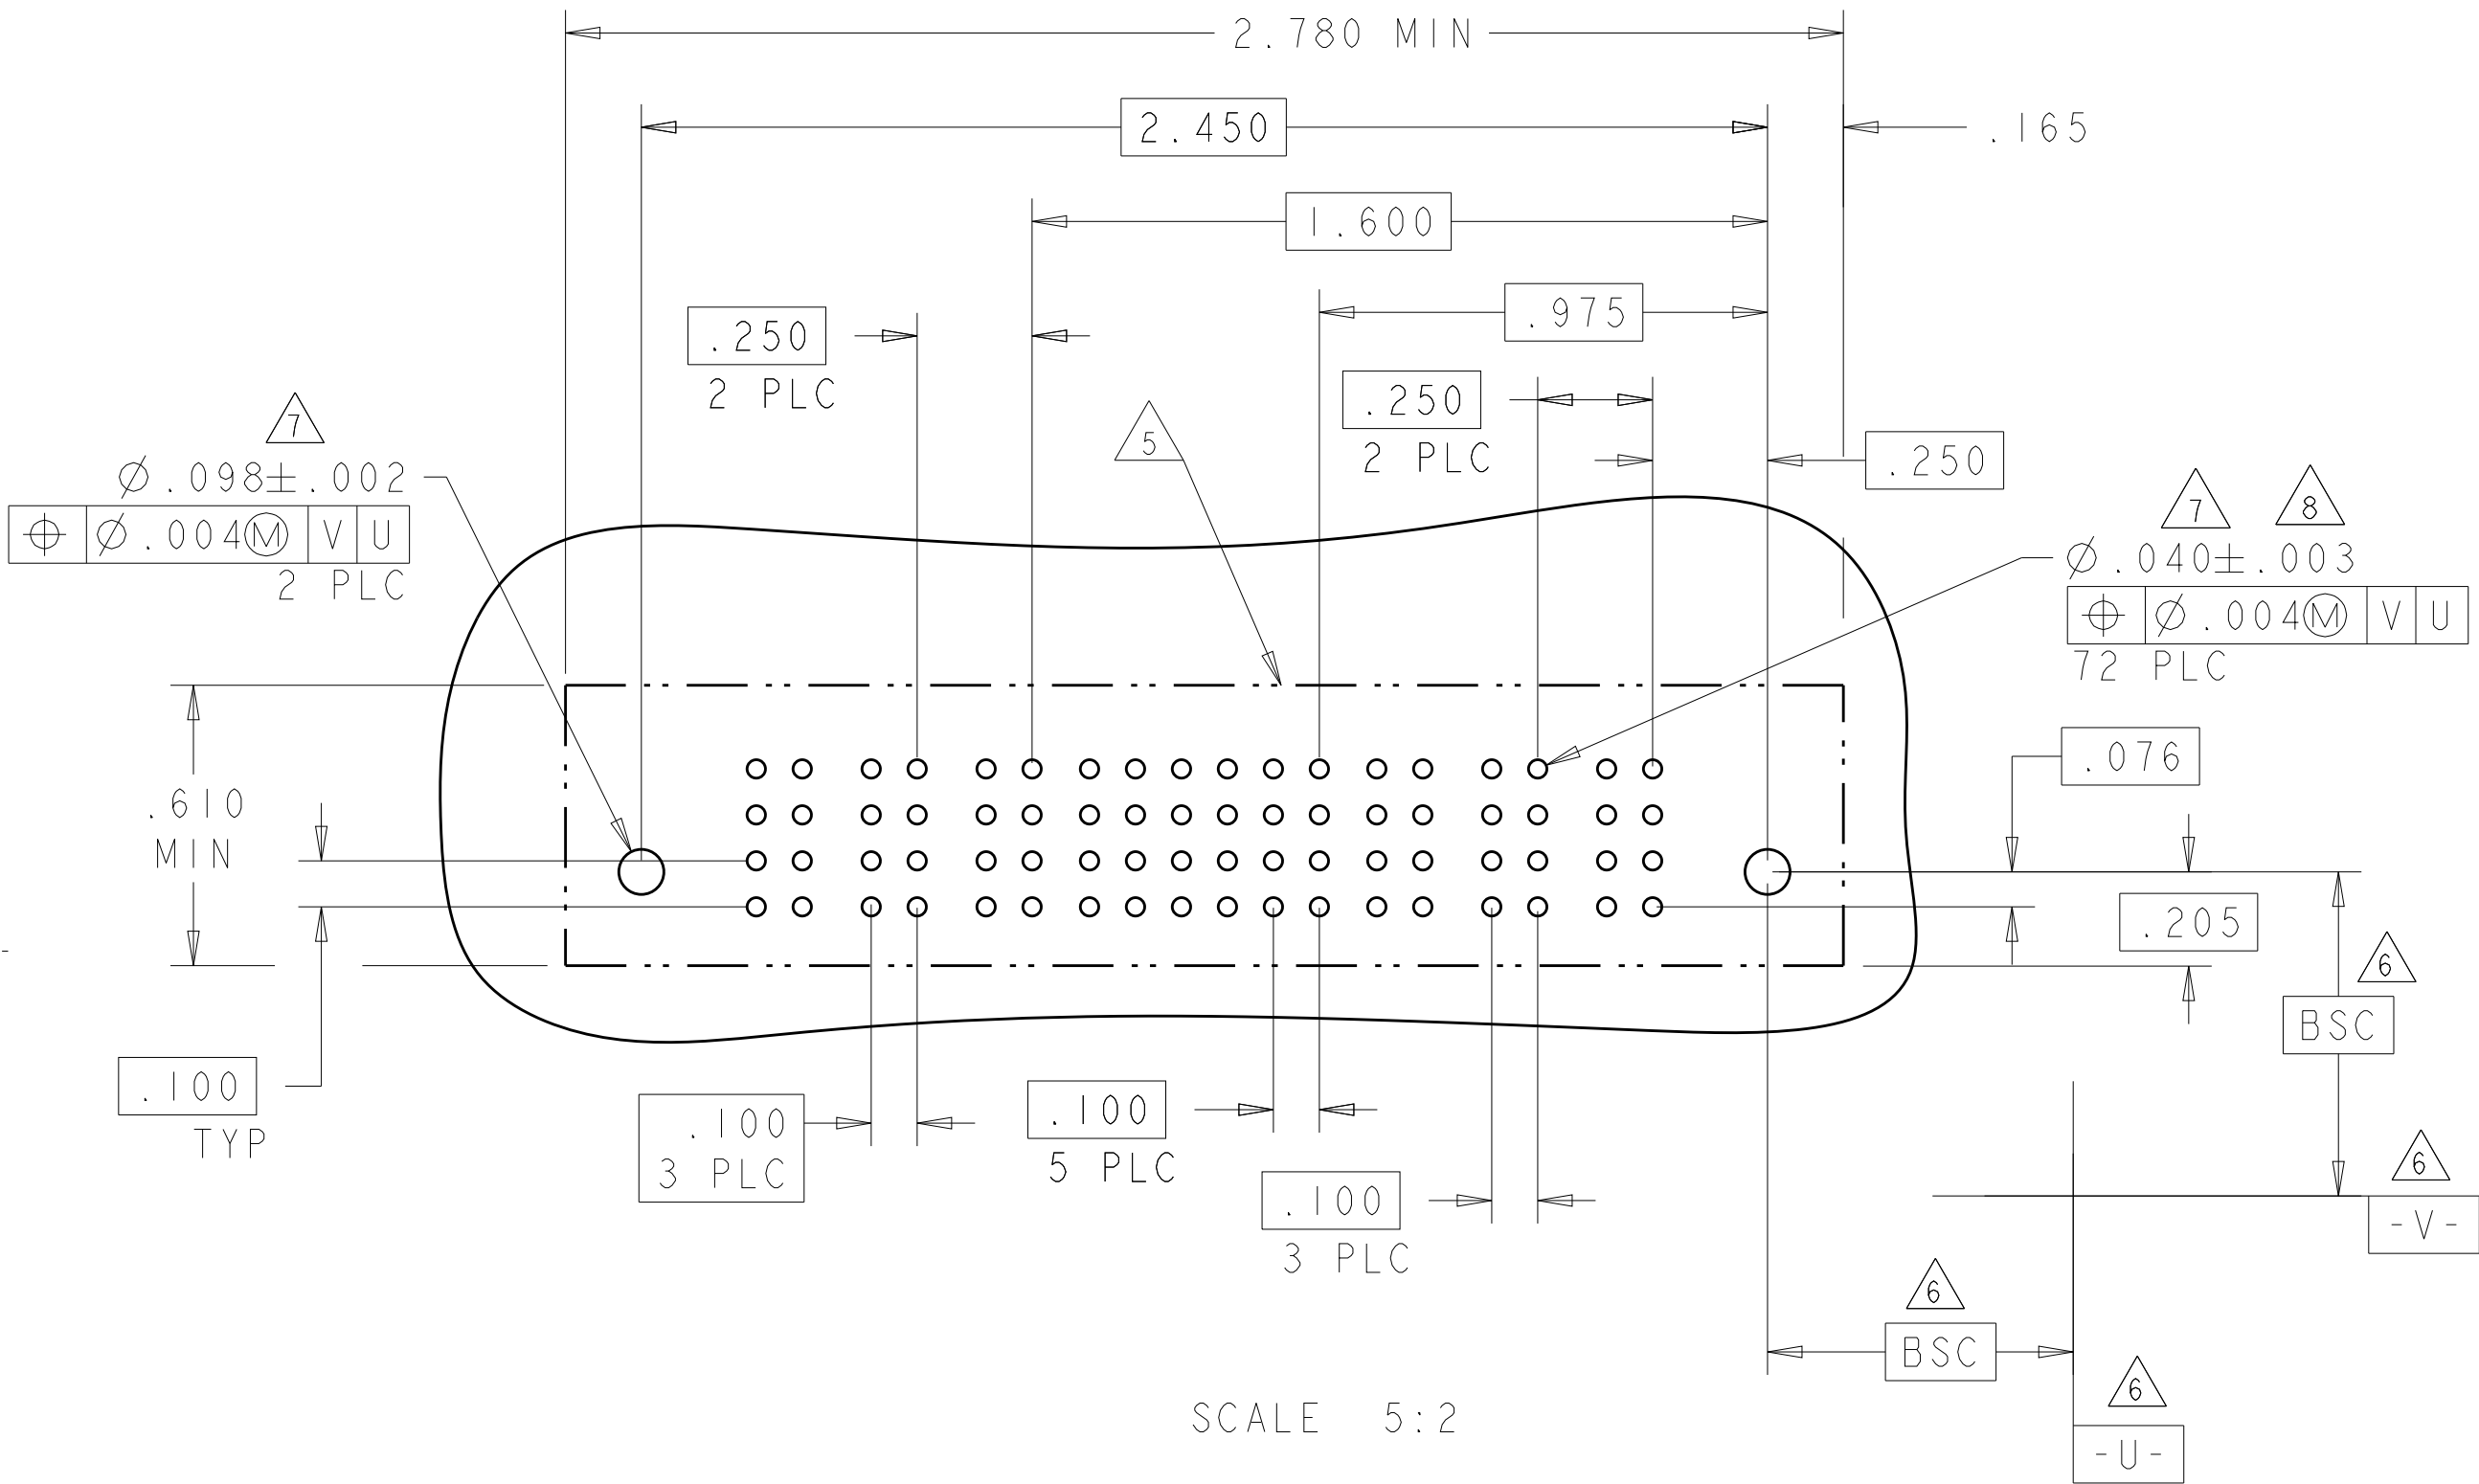
PART NUMBER	ROWS		POWER						SIGNAL					POWER								
			PI2	PI1	PI0	P9	P8	P7	5	4	3	2	1	P6	P5	P4	P3	P2	PI			
1-6450540-2	D C B A			GP	GP	GP	GP	GP	GP	AP	AP	AP	AP	AP	GP	GP	GP	GP	GP	GP		
										AP	AP	AP	AP	AP								
										AP	AP	AP	AP	AP								
										AP	AP	AP	AP	AP								
6P + 20S + 6P																						





PART NUMBER	ROWS		POWER											SIGNAL						POWER										
			P22	P21	P20	P19	P18	P17	P16	P15	P14	P13	P12	P11	6	5	4	3	2	1	P10	P9	P8	P7	P6	P5	P4	P3	P2	
1-6450540-4	D C B A		GP GP	AP AP AP AP AP AP						GP GP GP GP GP GP GP GP GP GP GP GP																				
				AP AP AP AP AP AP																										
				AP AP AP AP AP AP																										
				AP AP AP AP AP AP																										

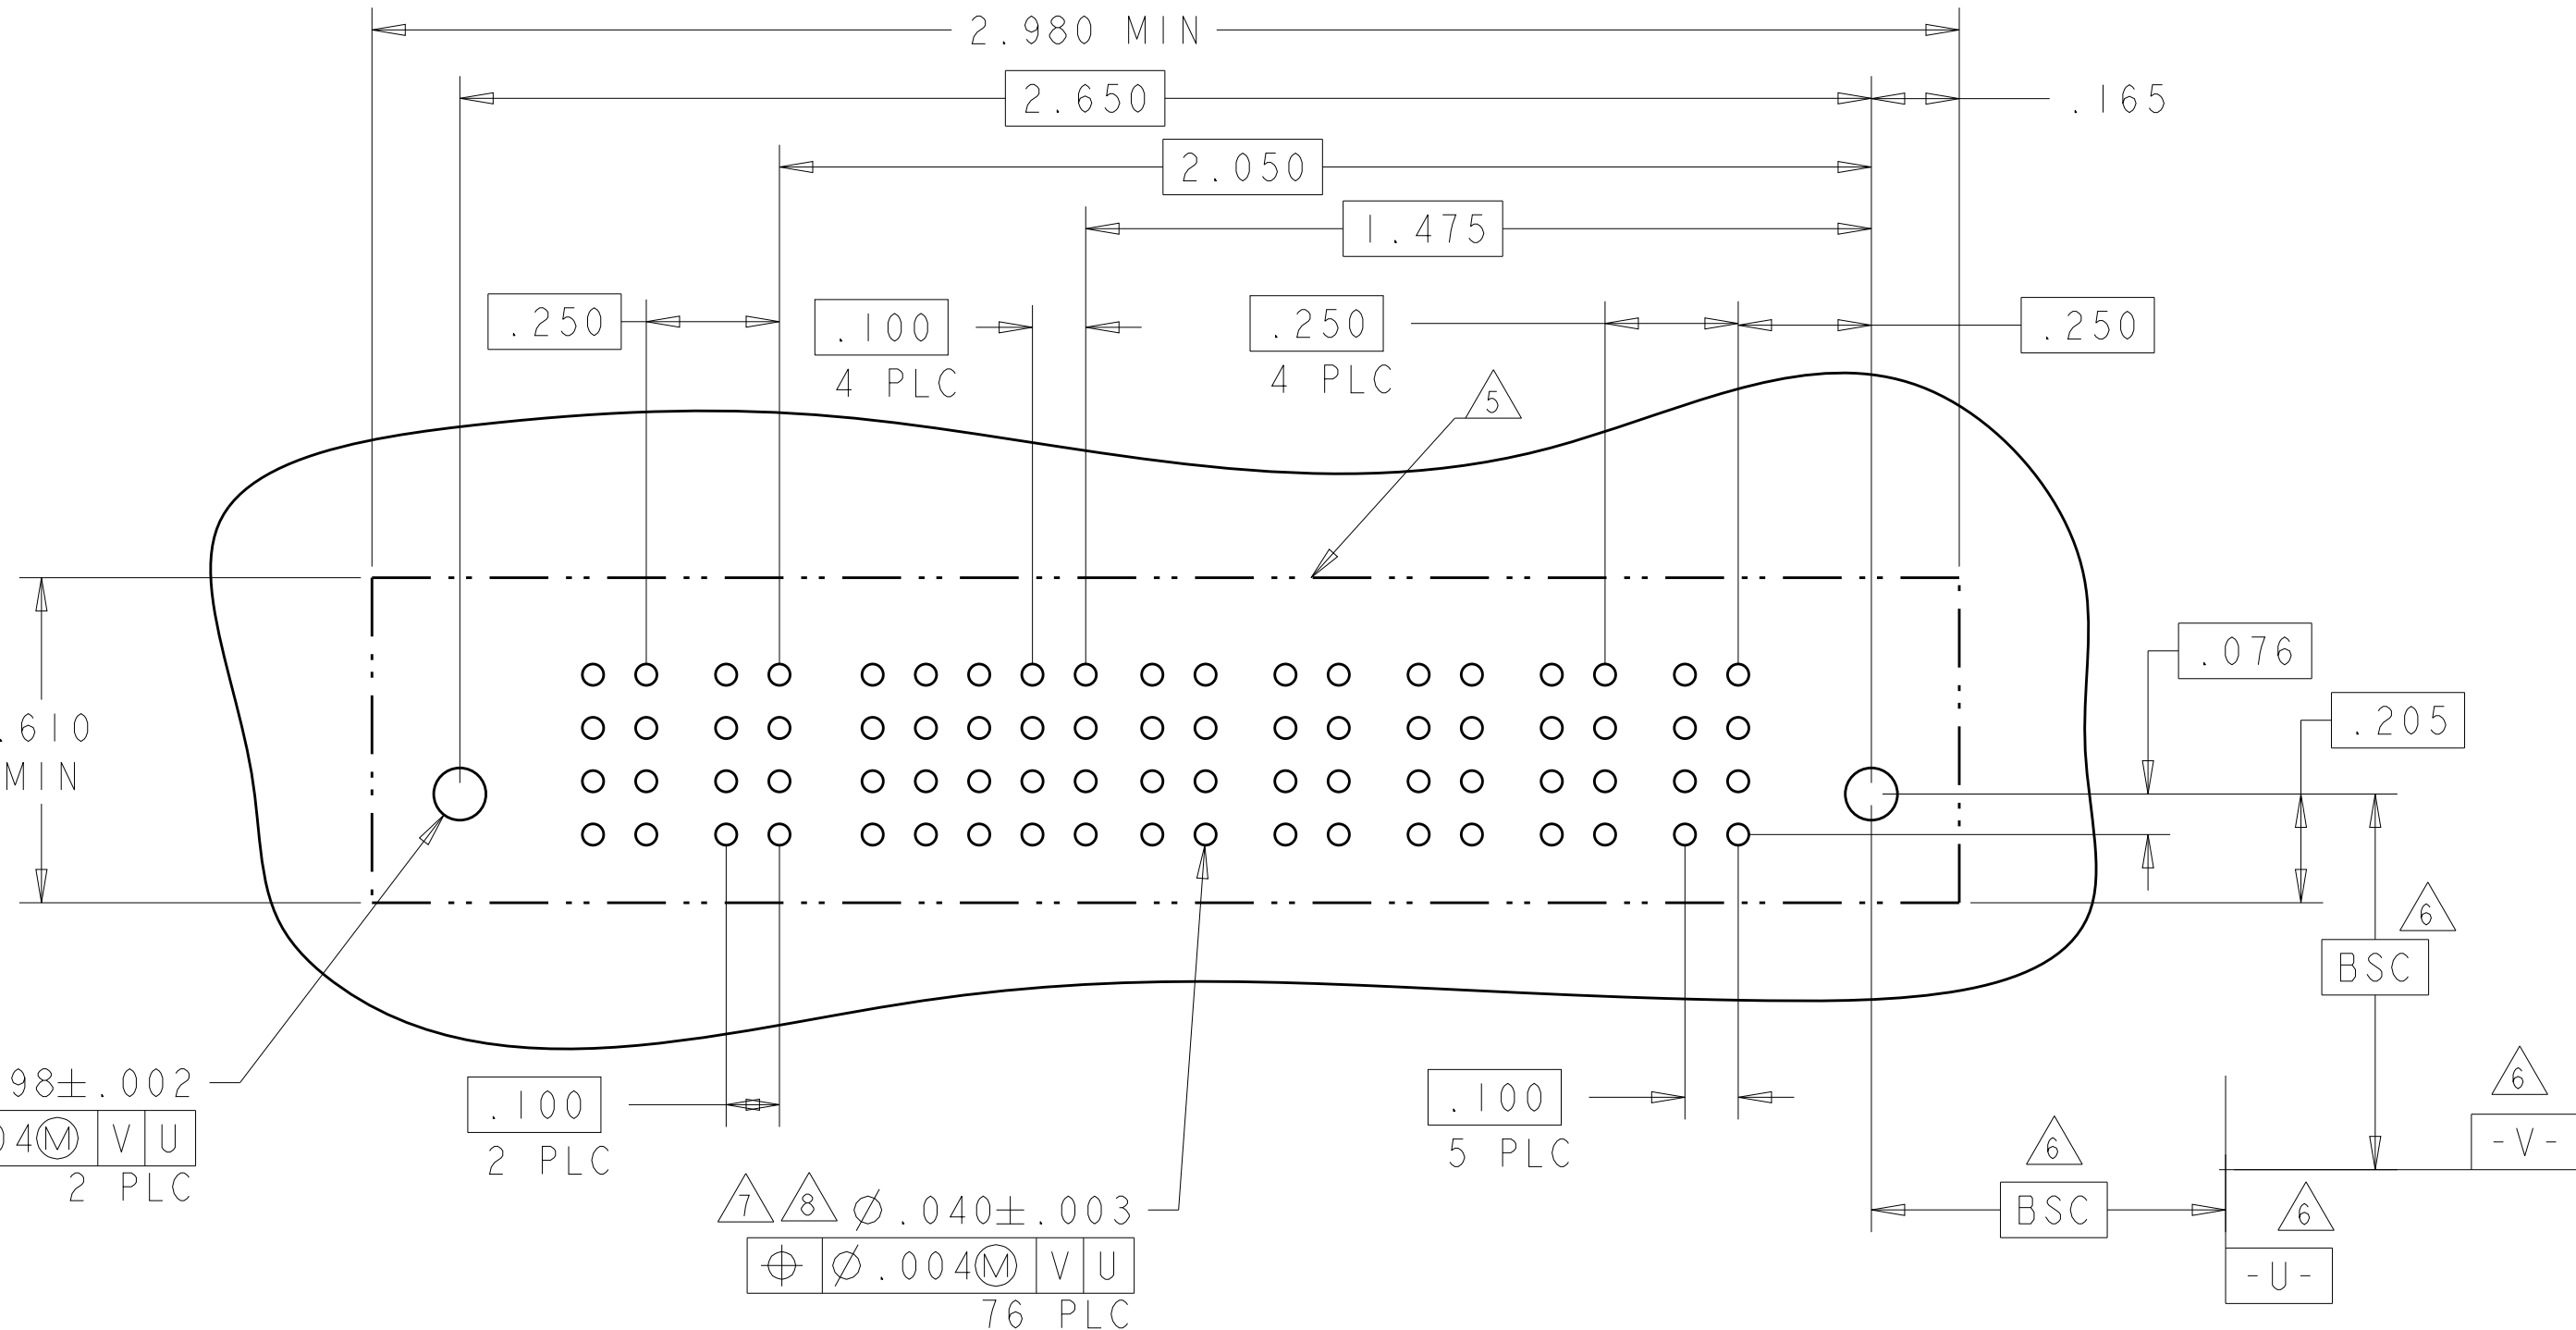



PART NUMBER	ROWS		POWER			SIGNAL					POWER				
			P6	P5	P4	6	5	4	3	2	1	P3	P2		P1
2-6450540-0	D C B A	 HD	 GP	 GP	 GP	AP	AP	AP	AP	AP	AP	 GP	 GP	 GP	 HD
						AP	AP	AP	AP	AP	AP				
						AP	AP	AP	AP	AP	AP				
						AP	AP	AP	AP	AP	AP				



THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN R. GRZYBOWSKI 29APR05	TE Connectivity	
DIMENSIONS: INCHES		CHK M. PERCHERKE 29APR05	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD M. PERCHERKE	PRODUCT SPEC	
0 PLC ±.01		108-1973	APPLICATION SPEC	
1 PLC ±.01			114-13038	
2 PLC ±.01			WEIGHT	
3 PLC ±.01			CUSTOMER DRAWING	
4 PLC ±.01			SCALE 2:1	
5 PLC ±.01			SHEET 7 OF 19	
6 PLC ±.01			REV K9	
7 PLC ±.01				
8 PLC ±.01				
9 PLC ±.01				
10 PLC ±.01				
11 PLC ±.01				
12 PLC ±.01				
13 PLC ±.01				
14 PLC ±.01				
15 PLC ±.01				
16 PLC ±.01				
17 PLC ±.01				
18 PLC ±.01				
19 PLC ±.01				
20 PLC ±.01				
21 PLC ±.01				
22 PLC ±.01				
23 PLC ±.01				
24 PLC ±.01				
25 PLC ±.01				
26 PLC ±.01				
27 PLC ±.01				
28 PLC ±.01				
29 PLC ±.01				
30 PLC ±.01				
31 PLC ±.01				
32 PLC ±.01				
33 PLC ±.01				
34 PLC ±.01				
35 PLC ±.01				
36 PLC ±.01				
37 PLC ±.01				
38 PLC ±.01				
39 PLC ±.01				
40 PLC ±.01				
41 PLC ±.01				
42 PLC ±.01				
43 PLC ±.01				
44 PLC ±.01				
45 PLC ±.01				
46 PLC ±.01				
47 PLC ±.01				
48 PLC ±.01				
49 PLC ±.01				
50 PLC ±.01				
51 PLC ±.01				
52 PLC ±.01				
53 PLC ±.01				
54 PLC ±.01				
55 PLC ±.01				
56 PLC ±.01				
57 PLC ±.01				
58 PLC ±.01				
59 PLC ±.01				
60 PLC ±.01				
61 PLC ±.01				
62 PLC ±.01				
63 PLC ±.01				
64 PLC ±.01				
65 PLC ±.01				
66 PLC ±.01				
67 PLC ±.01				
68 PLC ±.01				
69 PLC ±.01				
70 PLC ±.01				
71 PLC ±.01				
72 PLC ±.01				
73 PLC ±.01				
74 PLC ±.01				
75 PLC ±.01				
76 PLC ±.01				
77 PLC ±.01				
78 PLC ±.01				
79 PLC ±.01				
80 PLC ±.01				
81 PLC ±.01				
82 PLC ±.01				
83 PLC ±.01				
84 PLC ±.01				
85 PLC ±.01				
86 PLC ±.01				
87 PLC ±.01				
88 PLC ±.01				
89 PLC ±.01				
90 PLC ±.01				
91 PLC ±.01				
92 PLC ±.01				
93 PLC ±.01				
94 PLC ±.01				
95 PLC ±.01				
96 PLC ±.01				
97 PLC ±.01				
98 PLC ±.01				
99 PLC ±.01				
100 PLC ±.01				
101 PLC ±.01				
102 PLC ±.01				
103 PLC ±.01				
104 PLC ±.01				
105 PLC ±.01				
106 PLC ±.01				
107 PLC ±.01				
108 PLC ±.01				
109 PLC ±.01				
110 PLC ±.01				
111 PLC ±.01				
112 PLC ±.01				
113 PLC ±.01				
114 PLC ±.01				
115 PLC ±.01				
116 PLC ±.01				

PART NUMBER	ROWS		POWER		SIGNAL					POWER								
			P7	P6	5	4	3	2	1	P5	P4	P3	P2	P1				
4-6450540-3	D C B A				AP	AP	AP	AP	AP	AP								
5P + 20S + 2P																		



THIS DRAWING IS A CONTROLLED DOCUMENT.		DWA R. GRZYBOWSKI 29APR05		 TE Connectivity	
		CHP M. PERCHERKE 29APR05			
DIMENSIONS: INCHES		TOLERANCES, UNLESS OTHERWISE SPECIFIED:		NAME VERTICAL RECEPTEAL ASSEMBLY WITH GUIDES MULTI-BEAM XL	
		0 PLC ± 2 PLC ± 0.1 4 PLC ± 0.05 4 PLC ± 0.020		PRODUCT SPEC 108-1973	
		ANGLES $\pm 0.2^\circ$		APPLICATION SPEC 114-13038	
		FINISH		SIZE A1	
		MATERIAL		CASE CODE 100779	
		CUSTOMER DRAWING		DRAWING NO 6450540	
		WEIGHT -		RESTRICTED TO -	
		SCALE 2:1		SHEET 8 OF 19	
		REV K9			

Technical drawing of a mechanical part, likely a filter or screen, showing dimensions and tolerances. The part is a rectangular plate with rounded ends, featuring a central area with a grid of small holes. Key dimensions and features include:

- Overall Length:** 7.500 MIN.
- Top Surface Tolerances:**
 - Left end: $\triangle 6$ $\varnothing .098 \pm .003$ (Feature Control Frame: $\varnothing .004$ M, V, U)
 - Right end: $\varnothing .040 \pm .003$ $\triangle 6$ (Feature Control Frame: $\varnothing .004$ M, V, U), 280PLC
- Bottom Surface Tolerances:**
 - Left end: .610 MIN.
 - Right end: BSD $\triangle 5$, -V- $\triangle 5$, -U- $\triangle 5$
- Internal Features and Dimensions:**
 - Top edge: .100 TYP. (Feature Control Frame: $\triangle 4$)
 - Right edge: .135 REF
 - Internal grid area: 29PLC (left), 9PLC (middle), 29PLC (right)
 - Internal dimensions: .077, .205, .250, .100, .100, .100
 - Internal spacing: 4.050, 3.025

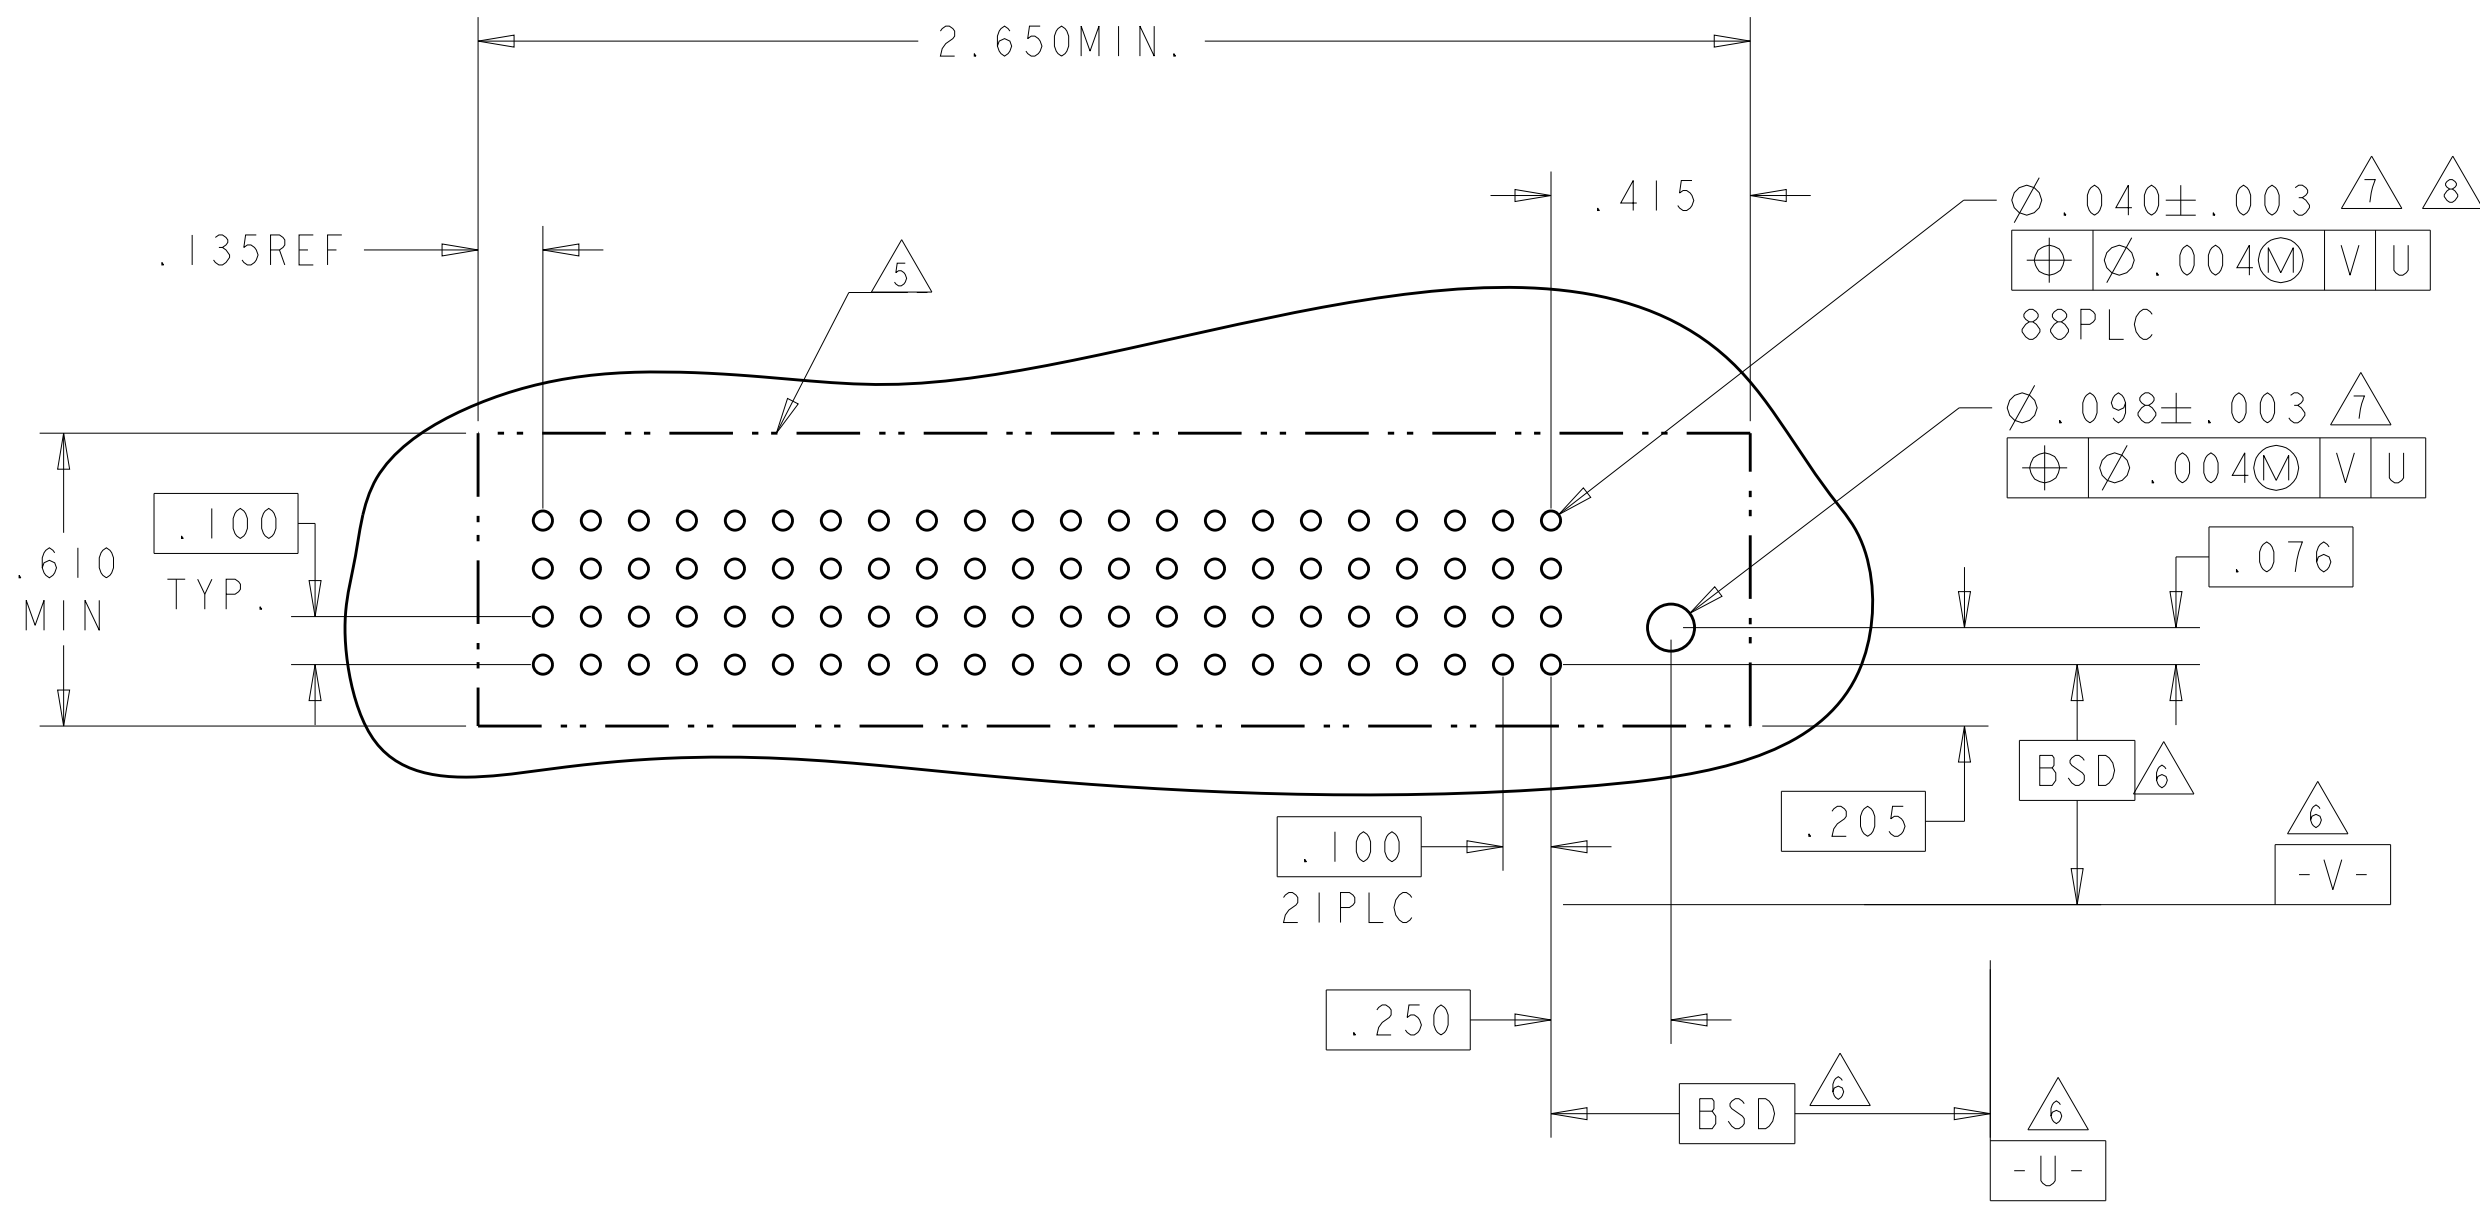
Technical drawing of a mechanical part, likely a nozzle or probe, showing dimensions and tolerances. The part is cylindrical with a central hole and a tapered section. Dimensions include overall length 7.500 MIN., hole diameter $\text{Ø}.040 \pm .003$, and various surface finish and material specifications.

Key dimensions and features:

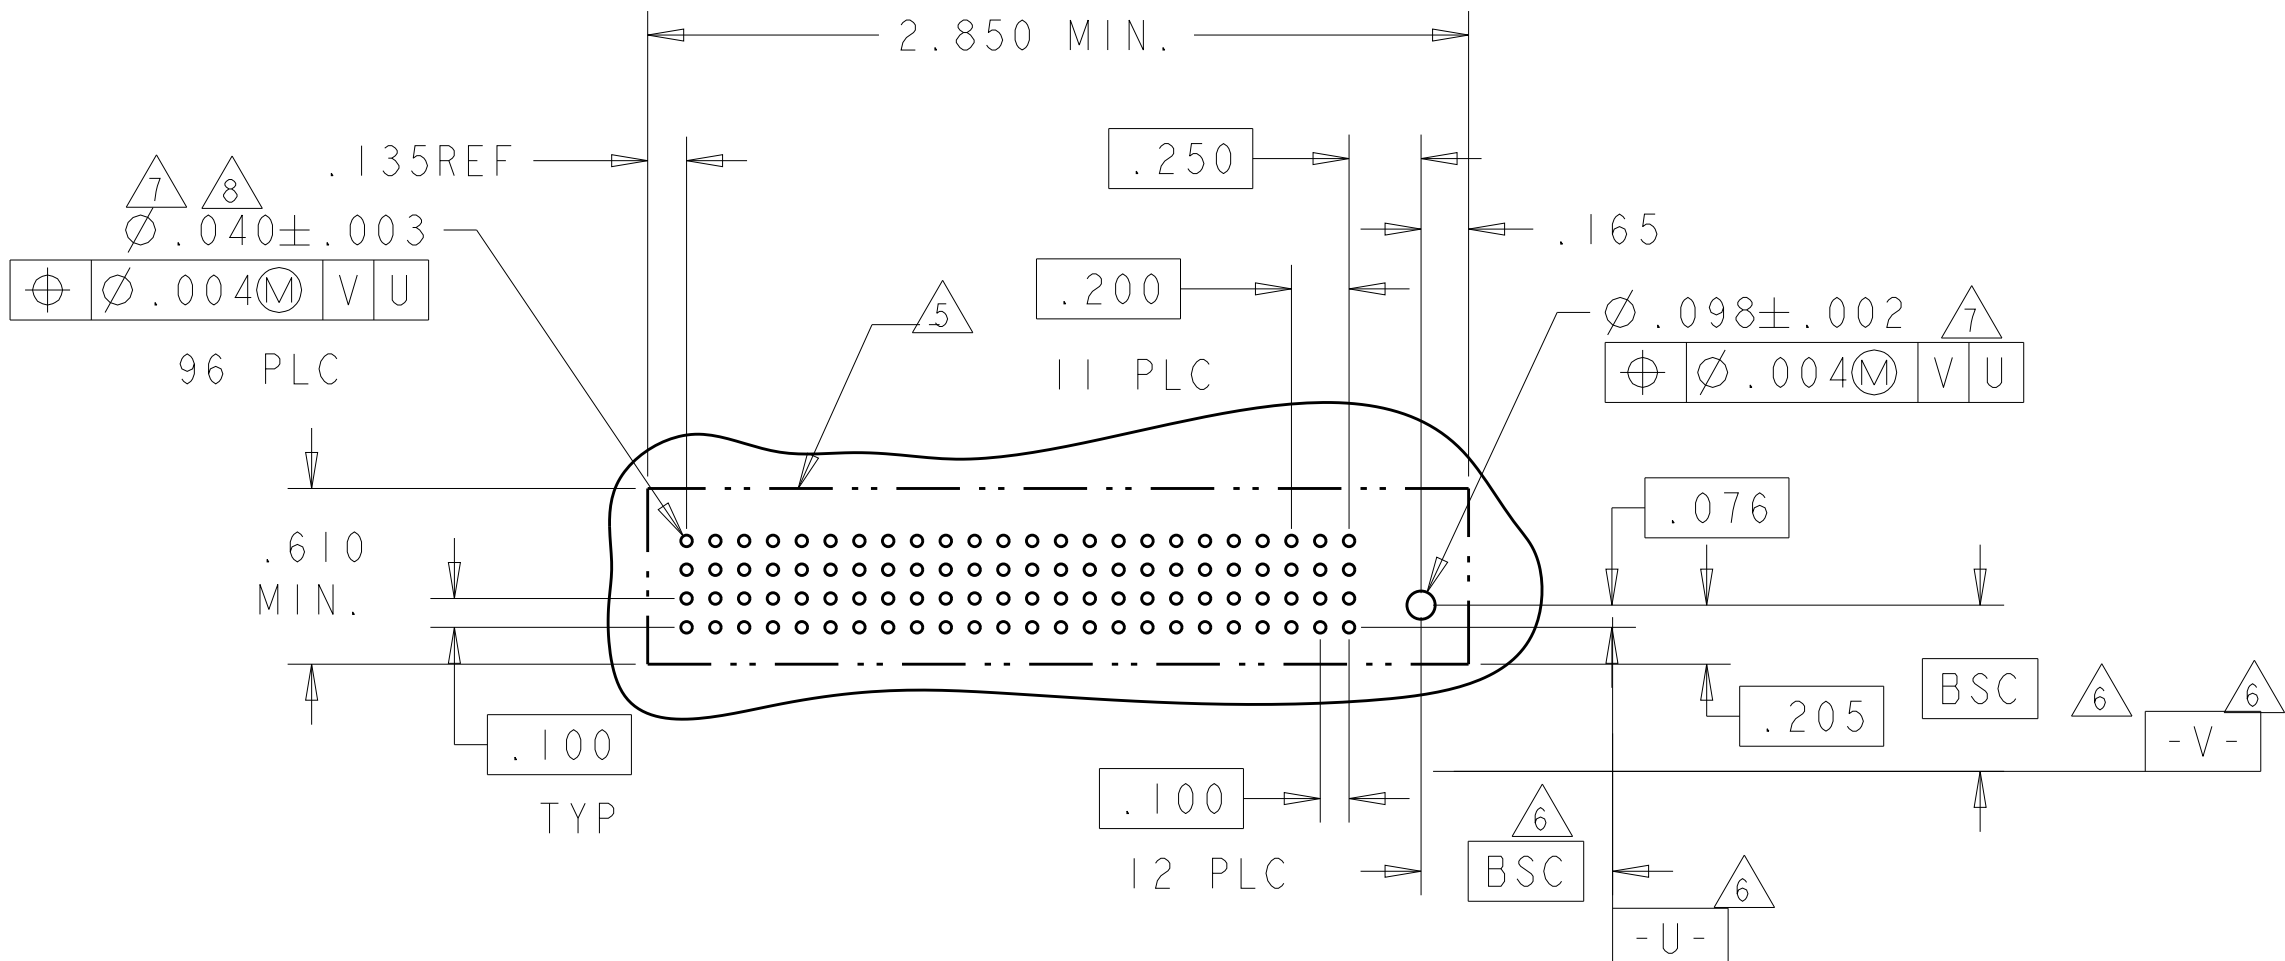
- Overall length: 7.500 MIN.
- Central hole diameter: $\text{Ø}.040 \pm .003$ (Surface finish: 4, Material: 280PLC)
- Inner hole diameter: $\text{Ø}.098 \pm .003$ (Surface finish: 6, Material: 280PLC)
- Surface finish: 4 (top surface), 6 (inner hole surface), 5 (bottom surface)
- Material: 280PLC
- Dimensions: 4.050, 3.025, .077, .250, .100 (TYP.), .100, .100, .100
- Labels: 29PLC, 9PLC, BSD, -V-, -U-

4805 (3/11)

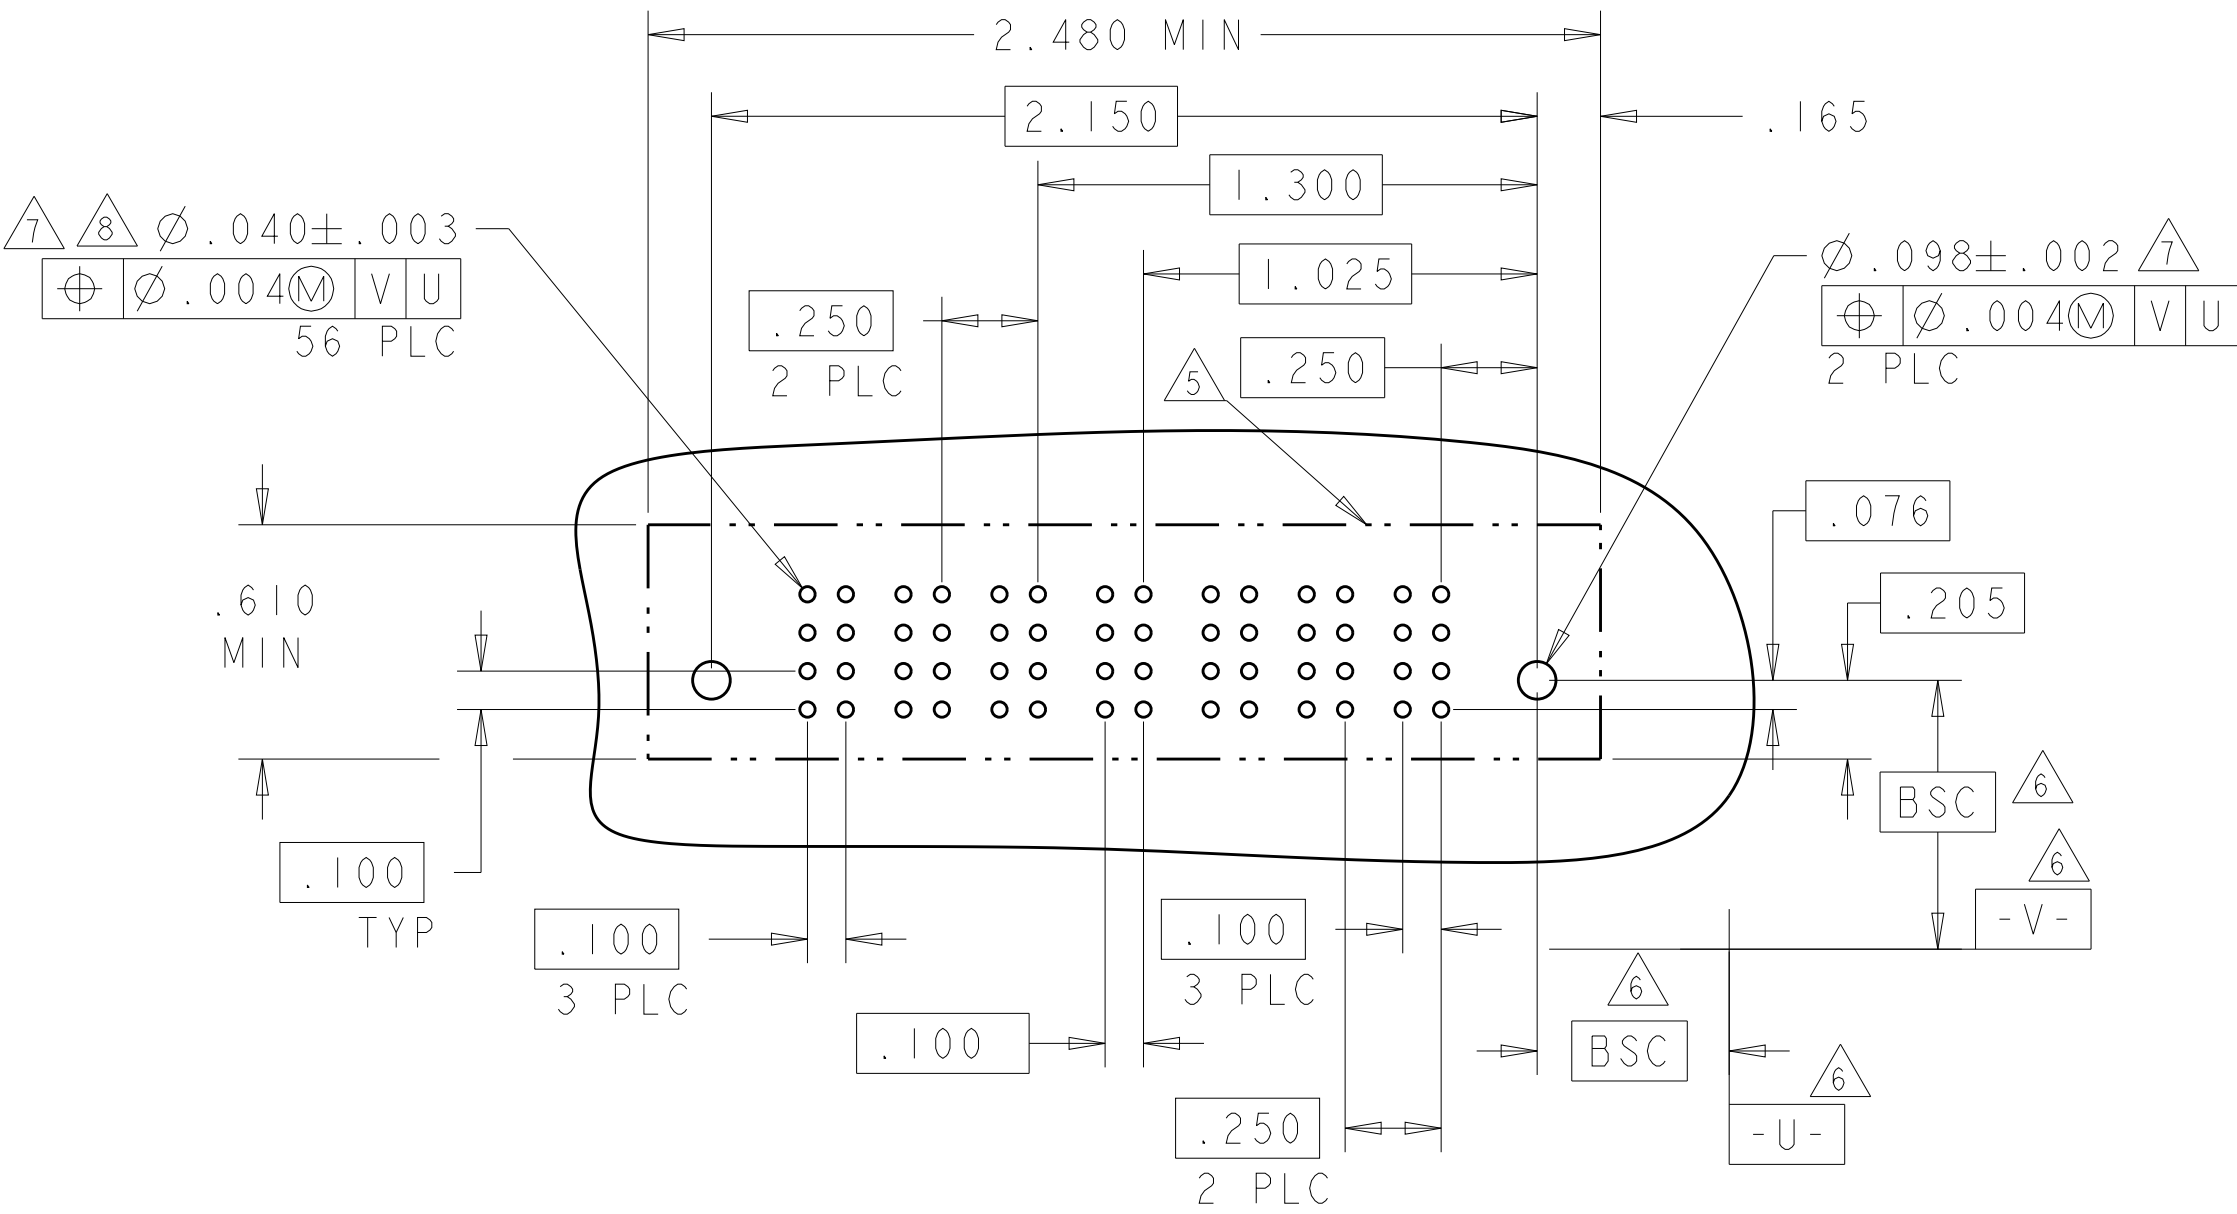
PART NUMBER	ROWS	POWER										
		P11	P10	P9	P8	P7	P6	P5	P3	P2	P1	
4-6450540-2	D C B A	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	
11HDP												

4805 (3/11)


PART NUMBER	ROWS	POWER											
		P12	P11	P10	P9	P8	P7	P6	P5	P3	P2		P1
4-6450540-5	DC CB A	GS	GS	GS	GS	GS	GS	GS	GS	GS	GS	GS	HD
12HDP													



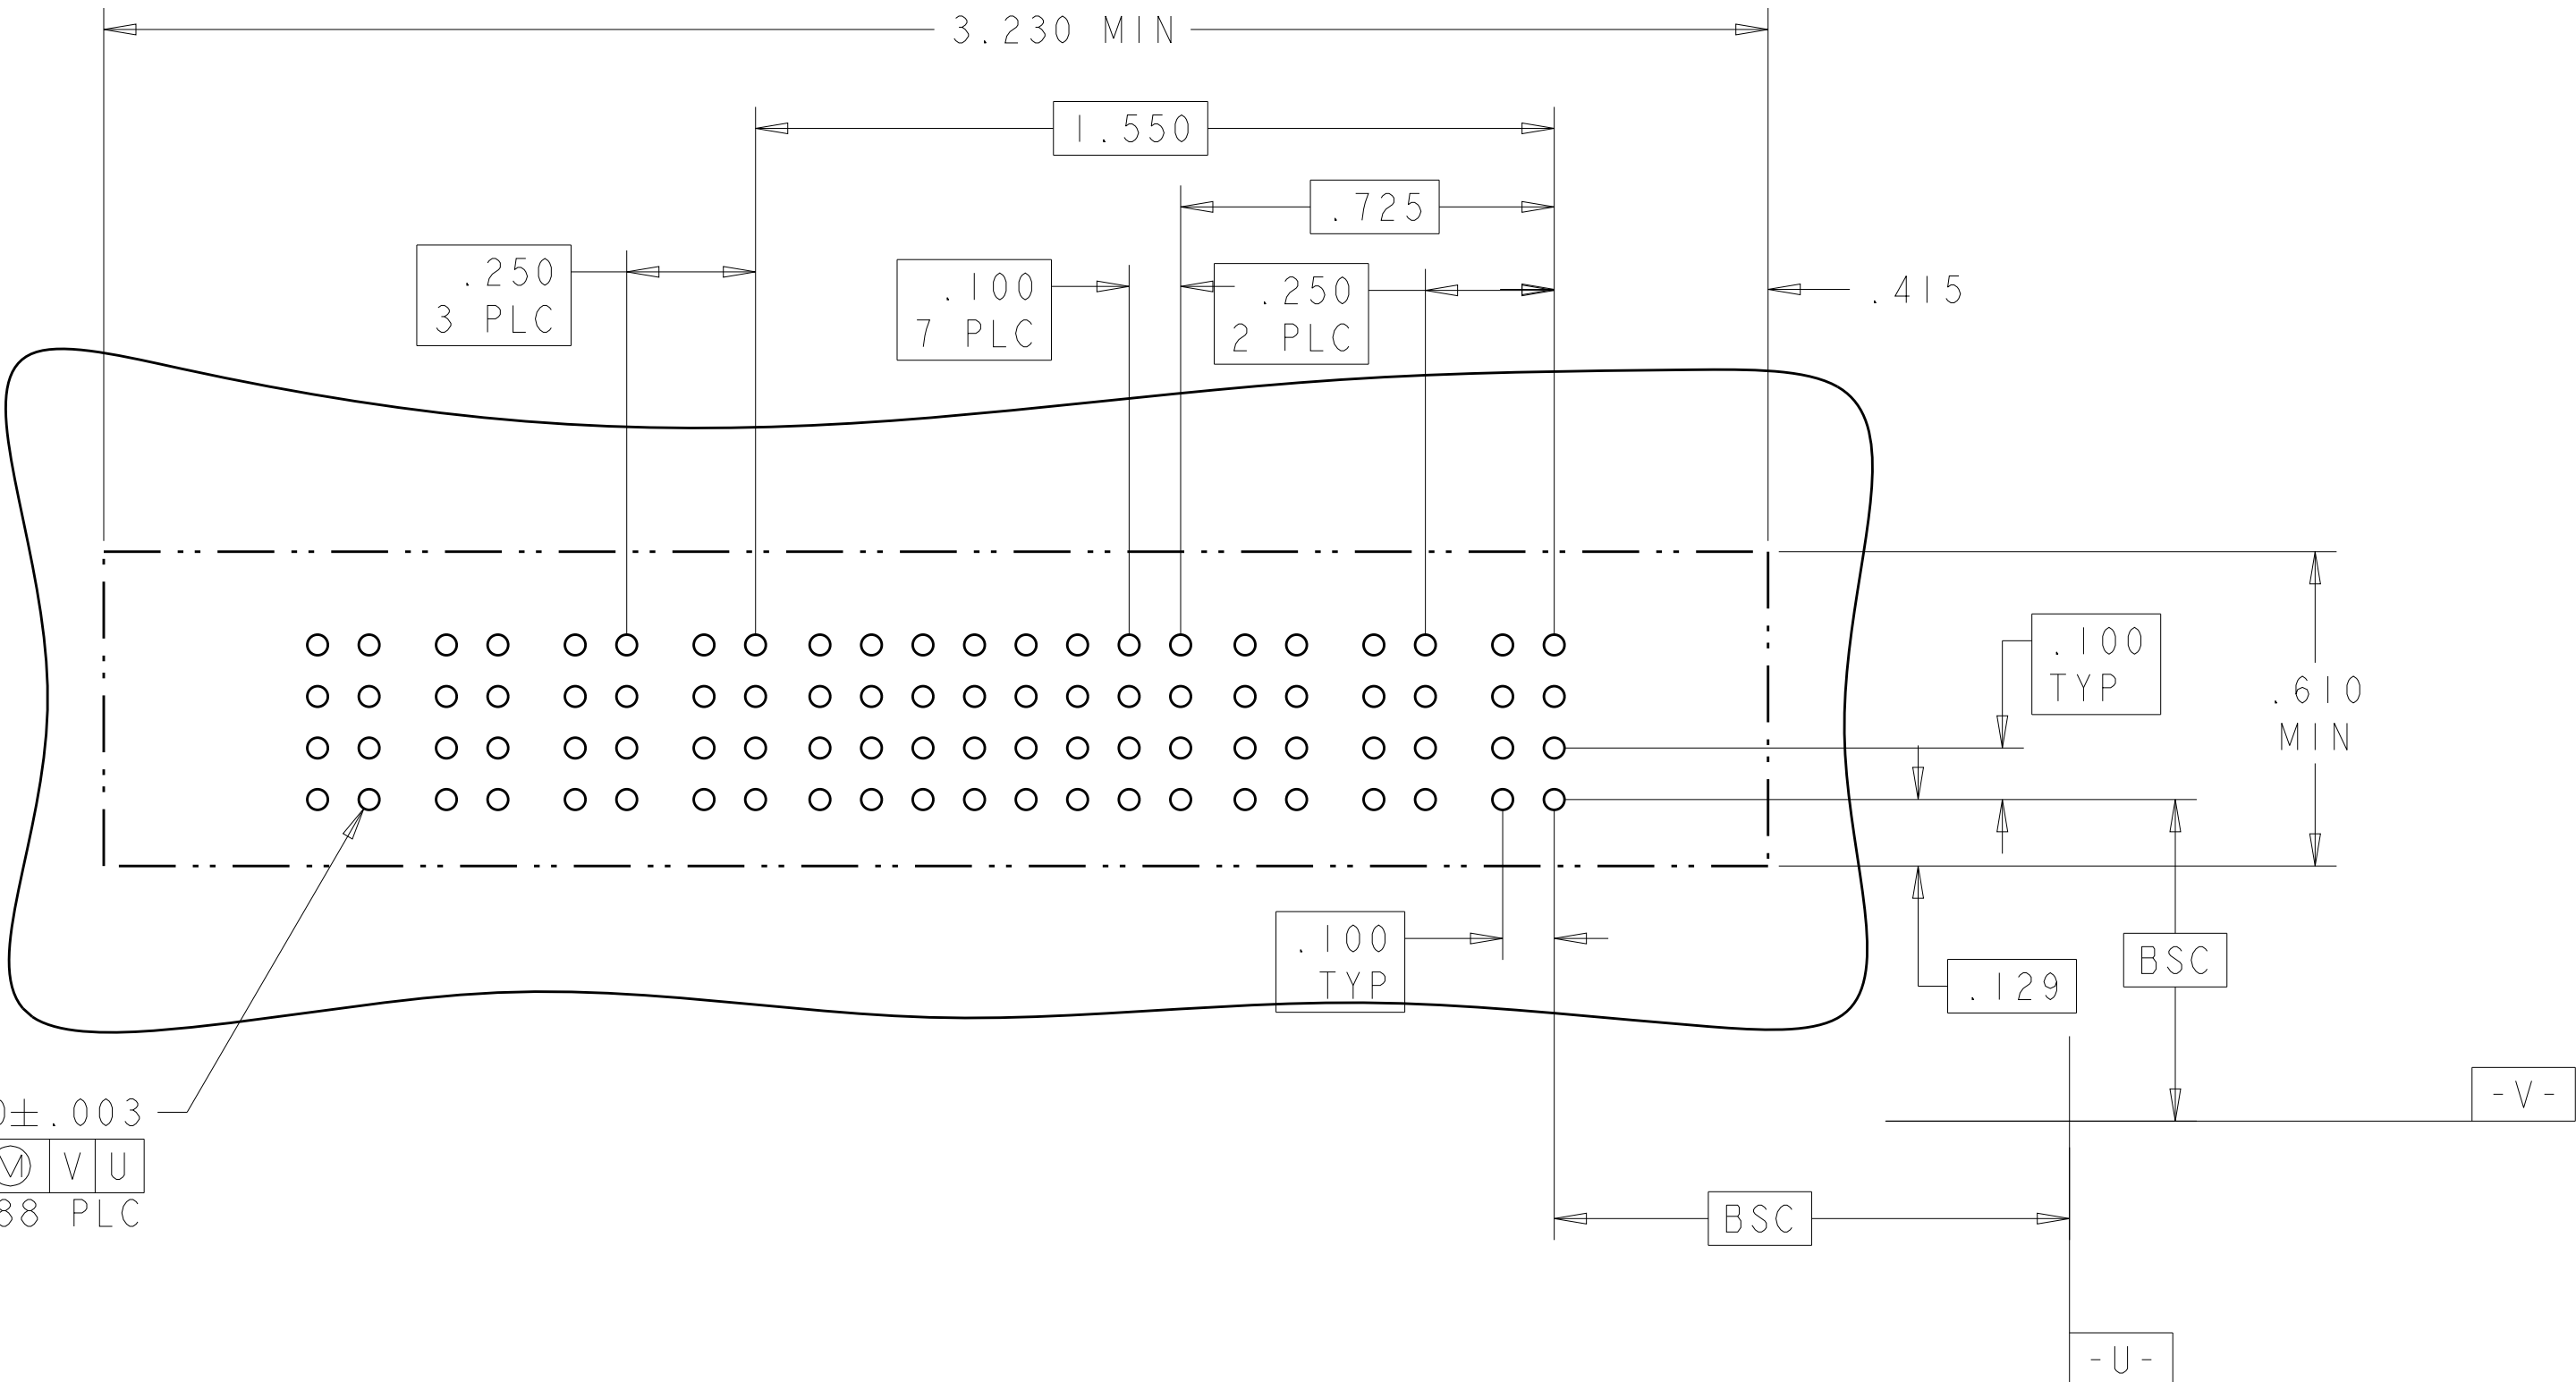
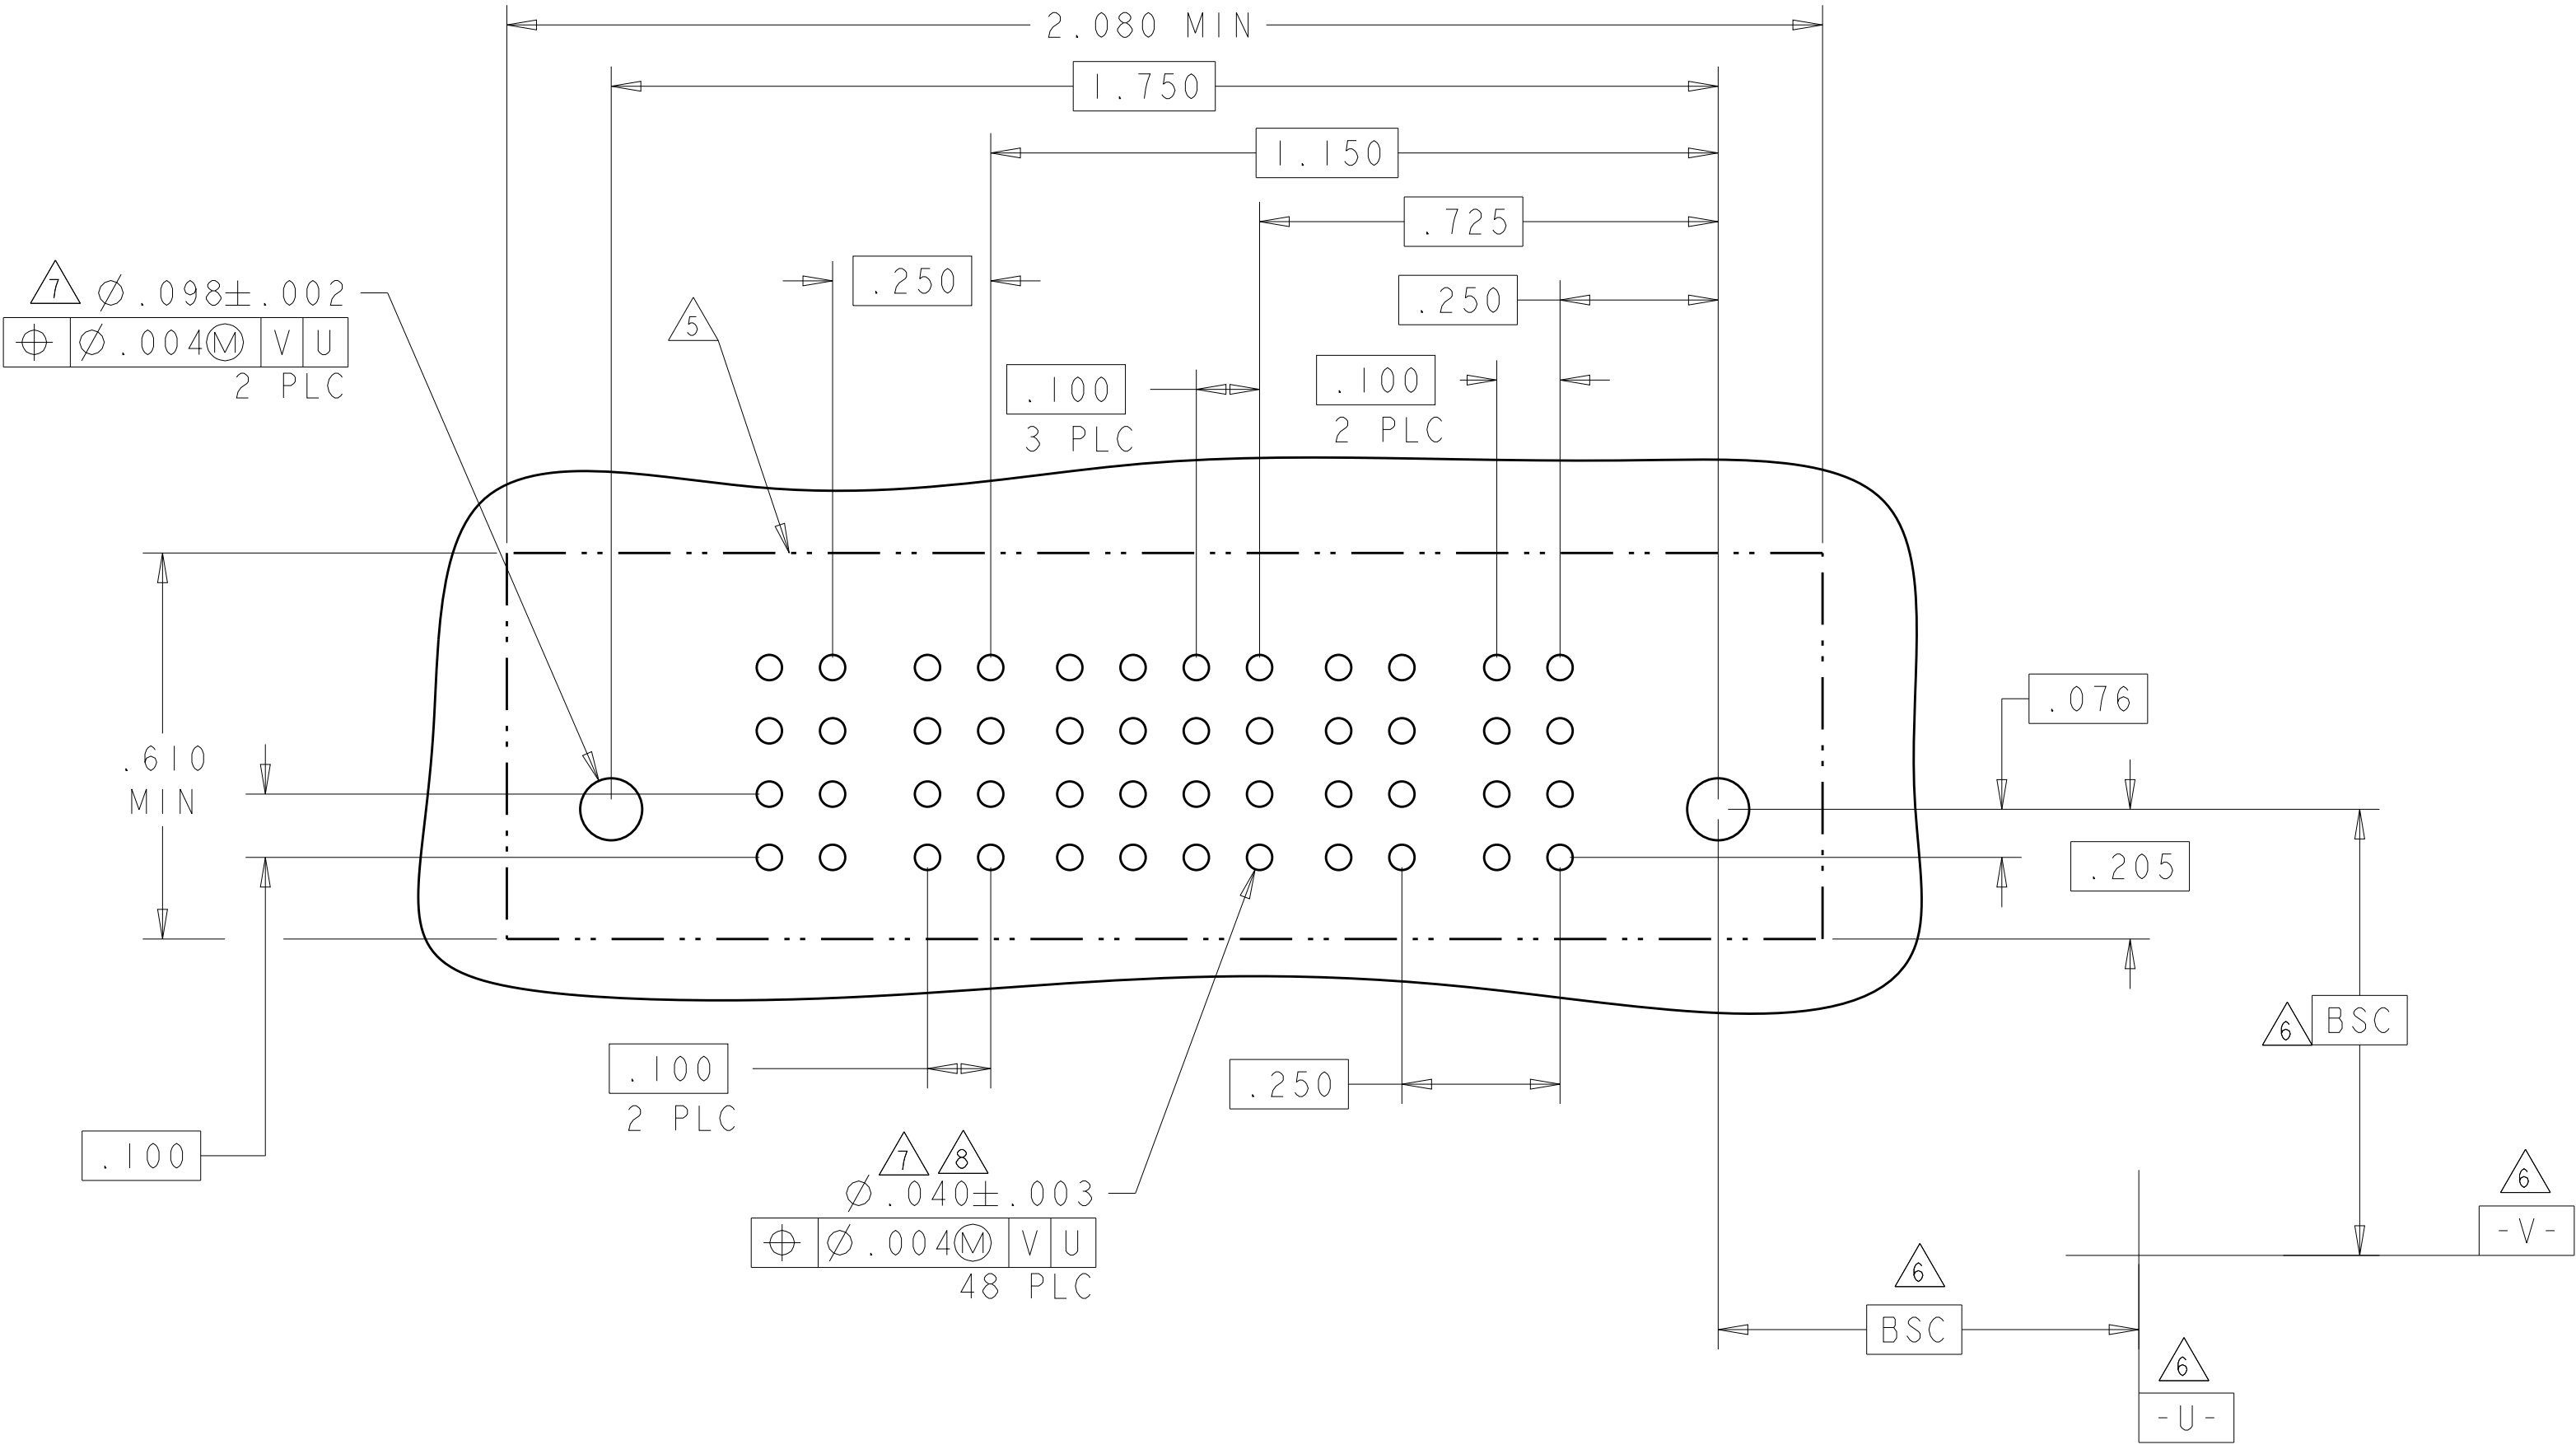
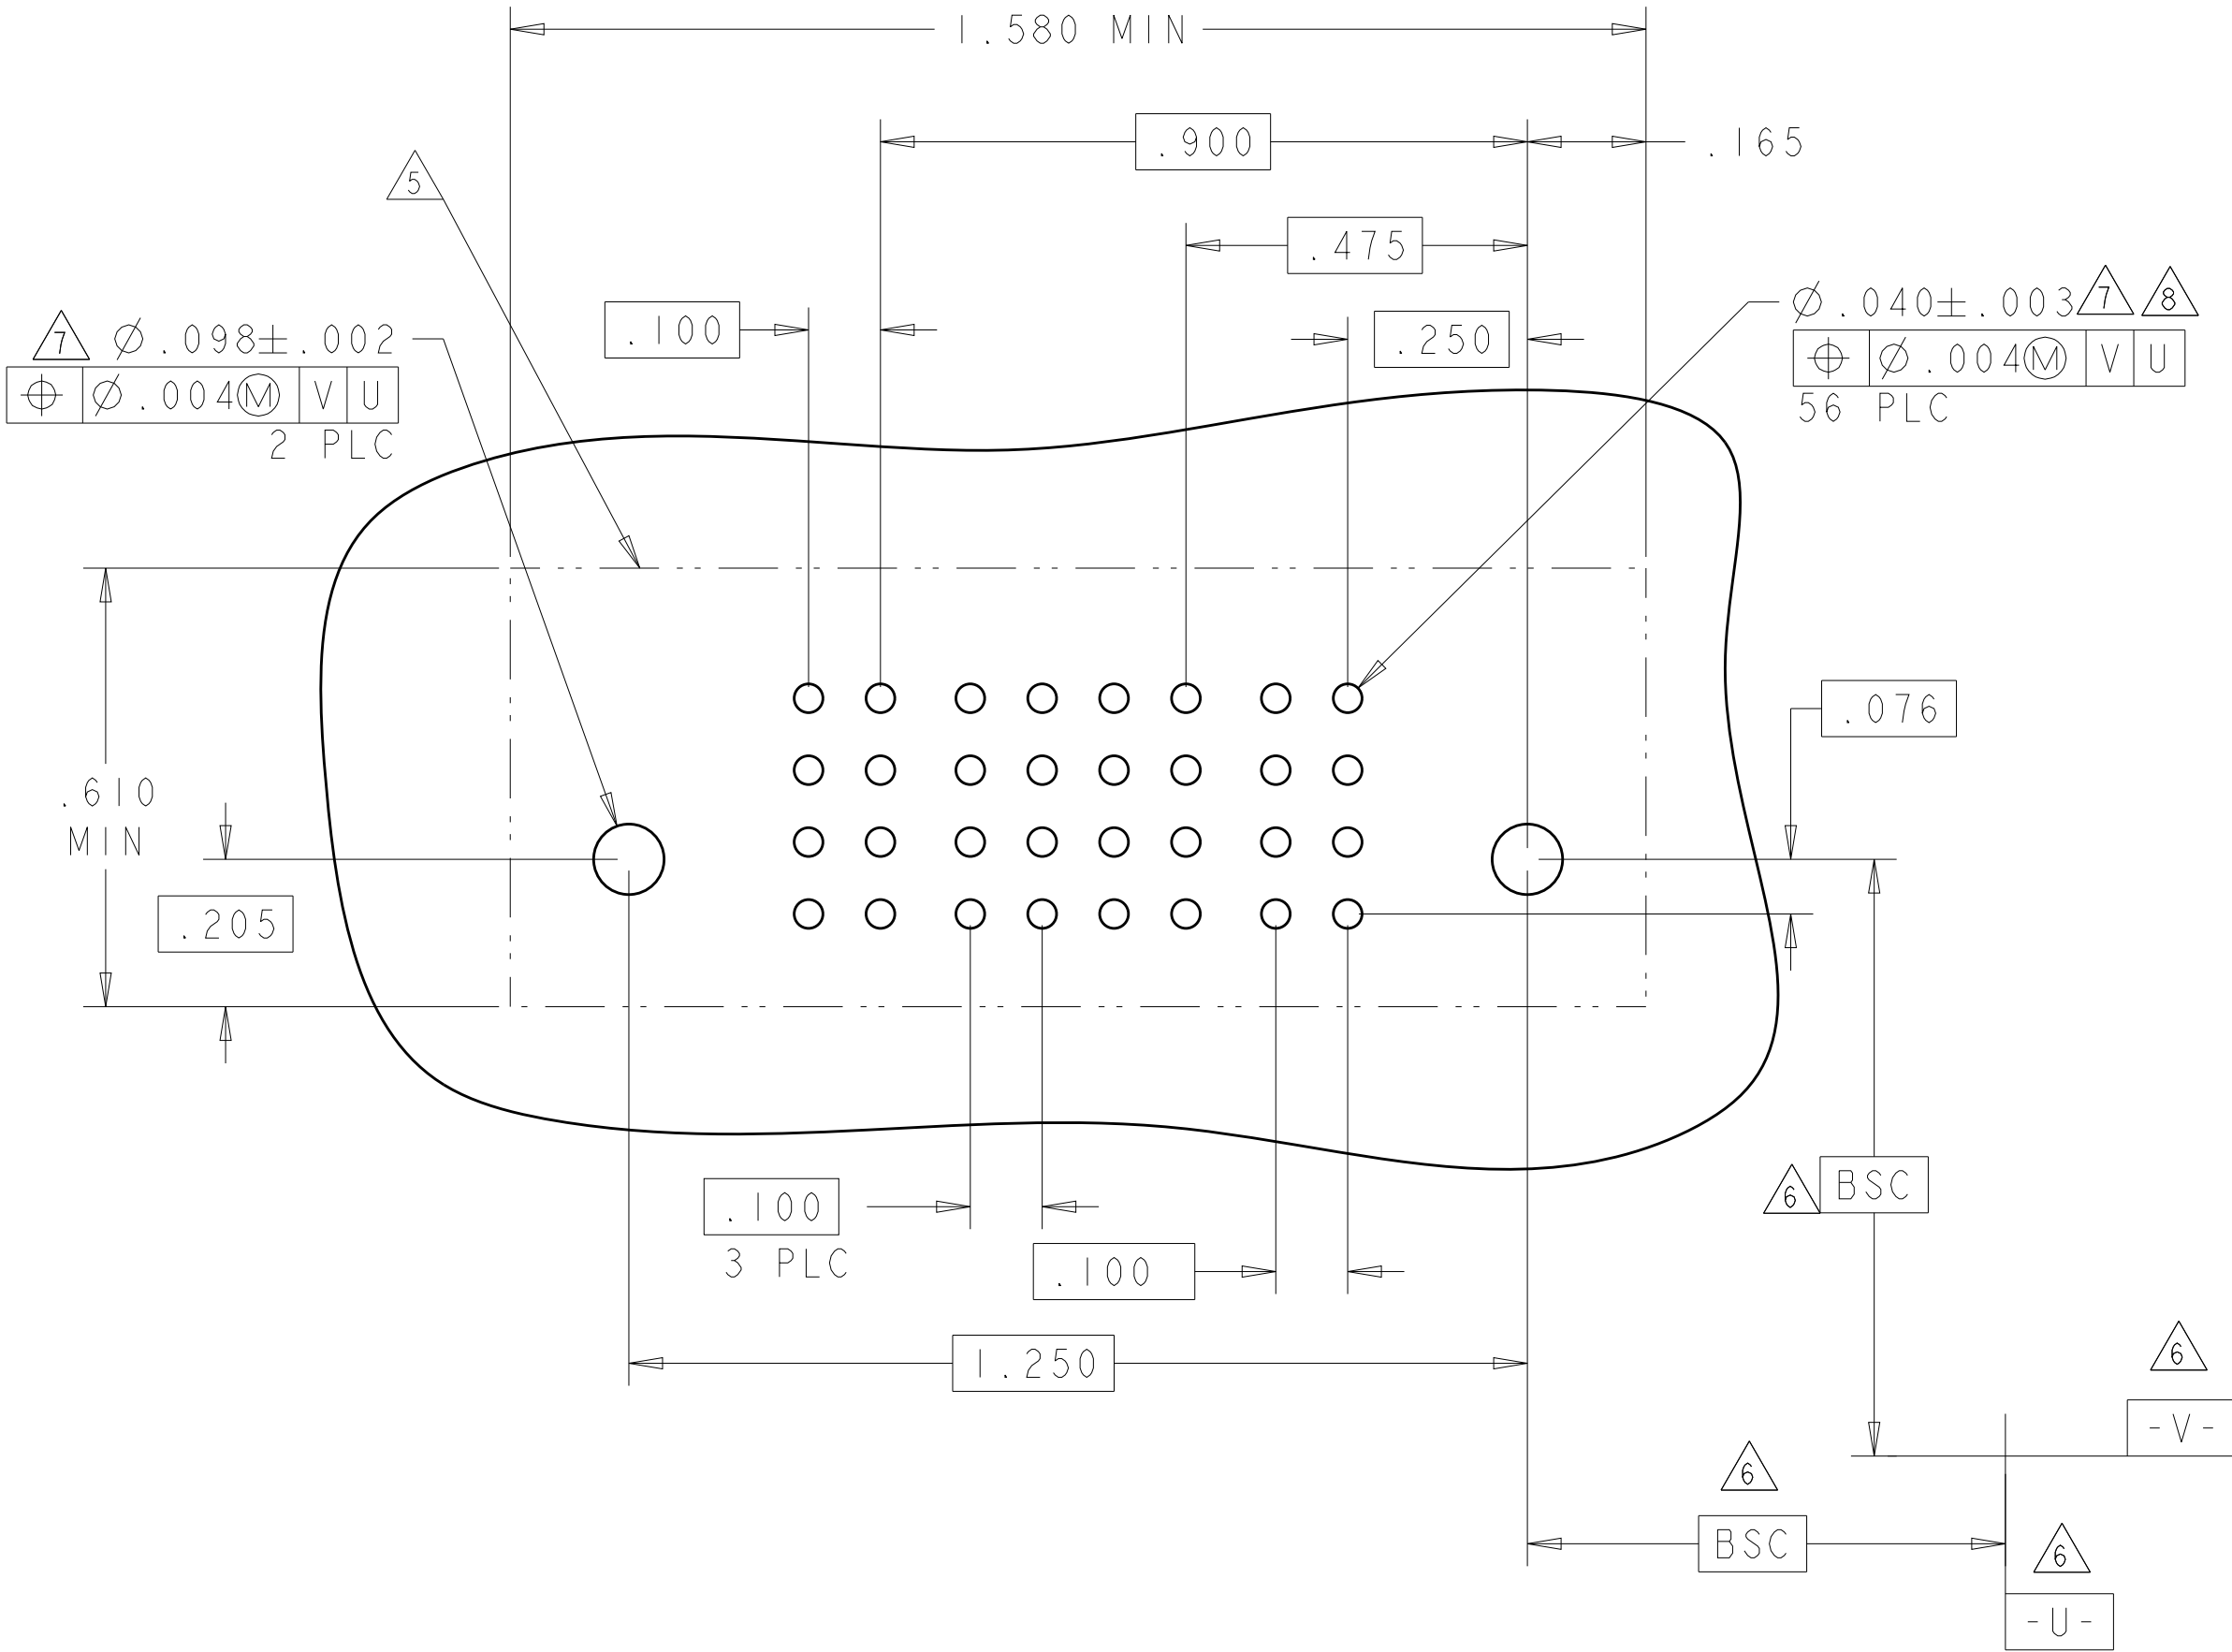
PART NUMBER	ROWS		POWER			SIGNAL		POWER			
			P6	P5	P4	2	1	P3	P2	P1	
4-6450540-7	D C B A										
3P + 8S + 3P											

4805 (3/11)

LOC		DIST		REVISIONS			
P	LYR	DESCRIPTION		DATE	DWN	APVD	
-	-	SEE SHEET 1		-	-	-	

PART NUMBER	ROWS		POWER		SIGNAL				POWER		
			P2	4	3	2	1	P1			
4-6450540-8	D C B A		GS	AP	AP	AP	AP	GS			
				AP	AP	AP	AP				
				AP	AP	AP	AP				
				AP	AP	AP	AP				
IP + 16S + 1P											

PART NUMBER	ROWS		POWER		SIGNAL				POWER		
			P4	P3	4	3	2	1	P2	P1	
5-6450540-1	D C B A				AP	AP	AP	AP			
					AP	AP	AP	AP			
					AP	AP	AP	AP			
					AP	AP	AP	AP			
2P + 16S + 2P											



PART NUMBER	ROWS		POWER				SIGNAL								POWER				
			P7	P6	P5	P4	8	7	6	5	4	3	2	1	P3	P2	P1		
1-6450540-1	D C B A						P	P	P	P	P	P	P	P					
							P	P	P	P	P	P	P	P					
							P	P	P	P	P	P	P	P					
							P	P	P	P	P	P	P	P					
3P + 32S + 4P																			

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN: R. GRZYBOWSKI 29APR05
CHK: M. PERCHERKE 29APR05
APVD: M. PERCHERKE

PRODUCT SPEC: 108-1973
APPLICATION SPEC: 114-13038
WEIGHT: -
CUSTOMER DRAWING

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±.01
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.0020
ANGLES ±2°
FINISH





NAME: VERTICAL RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL

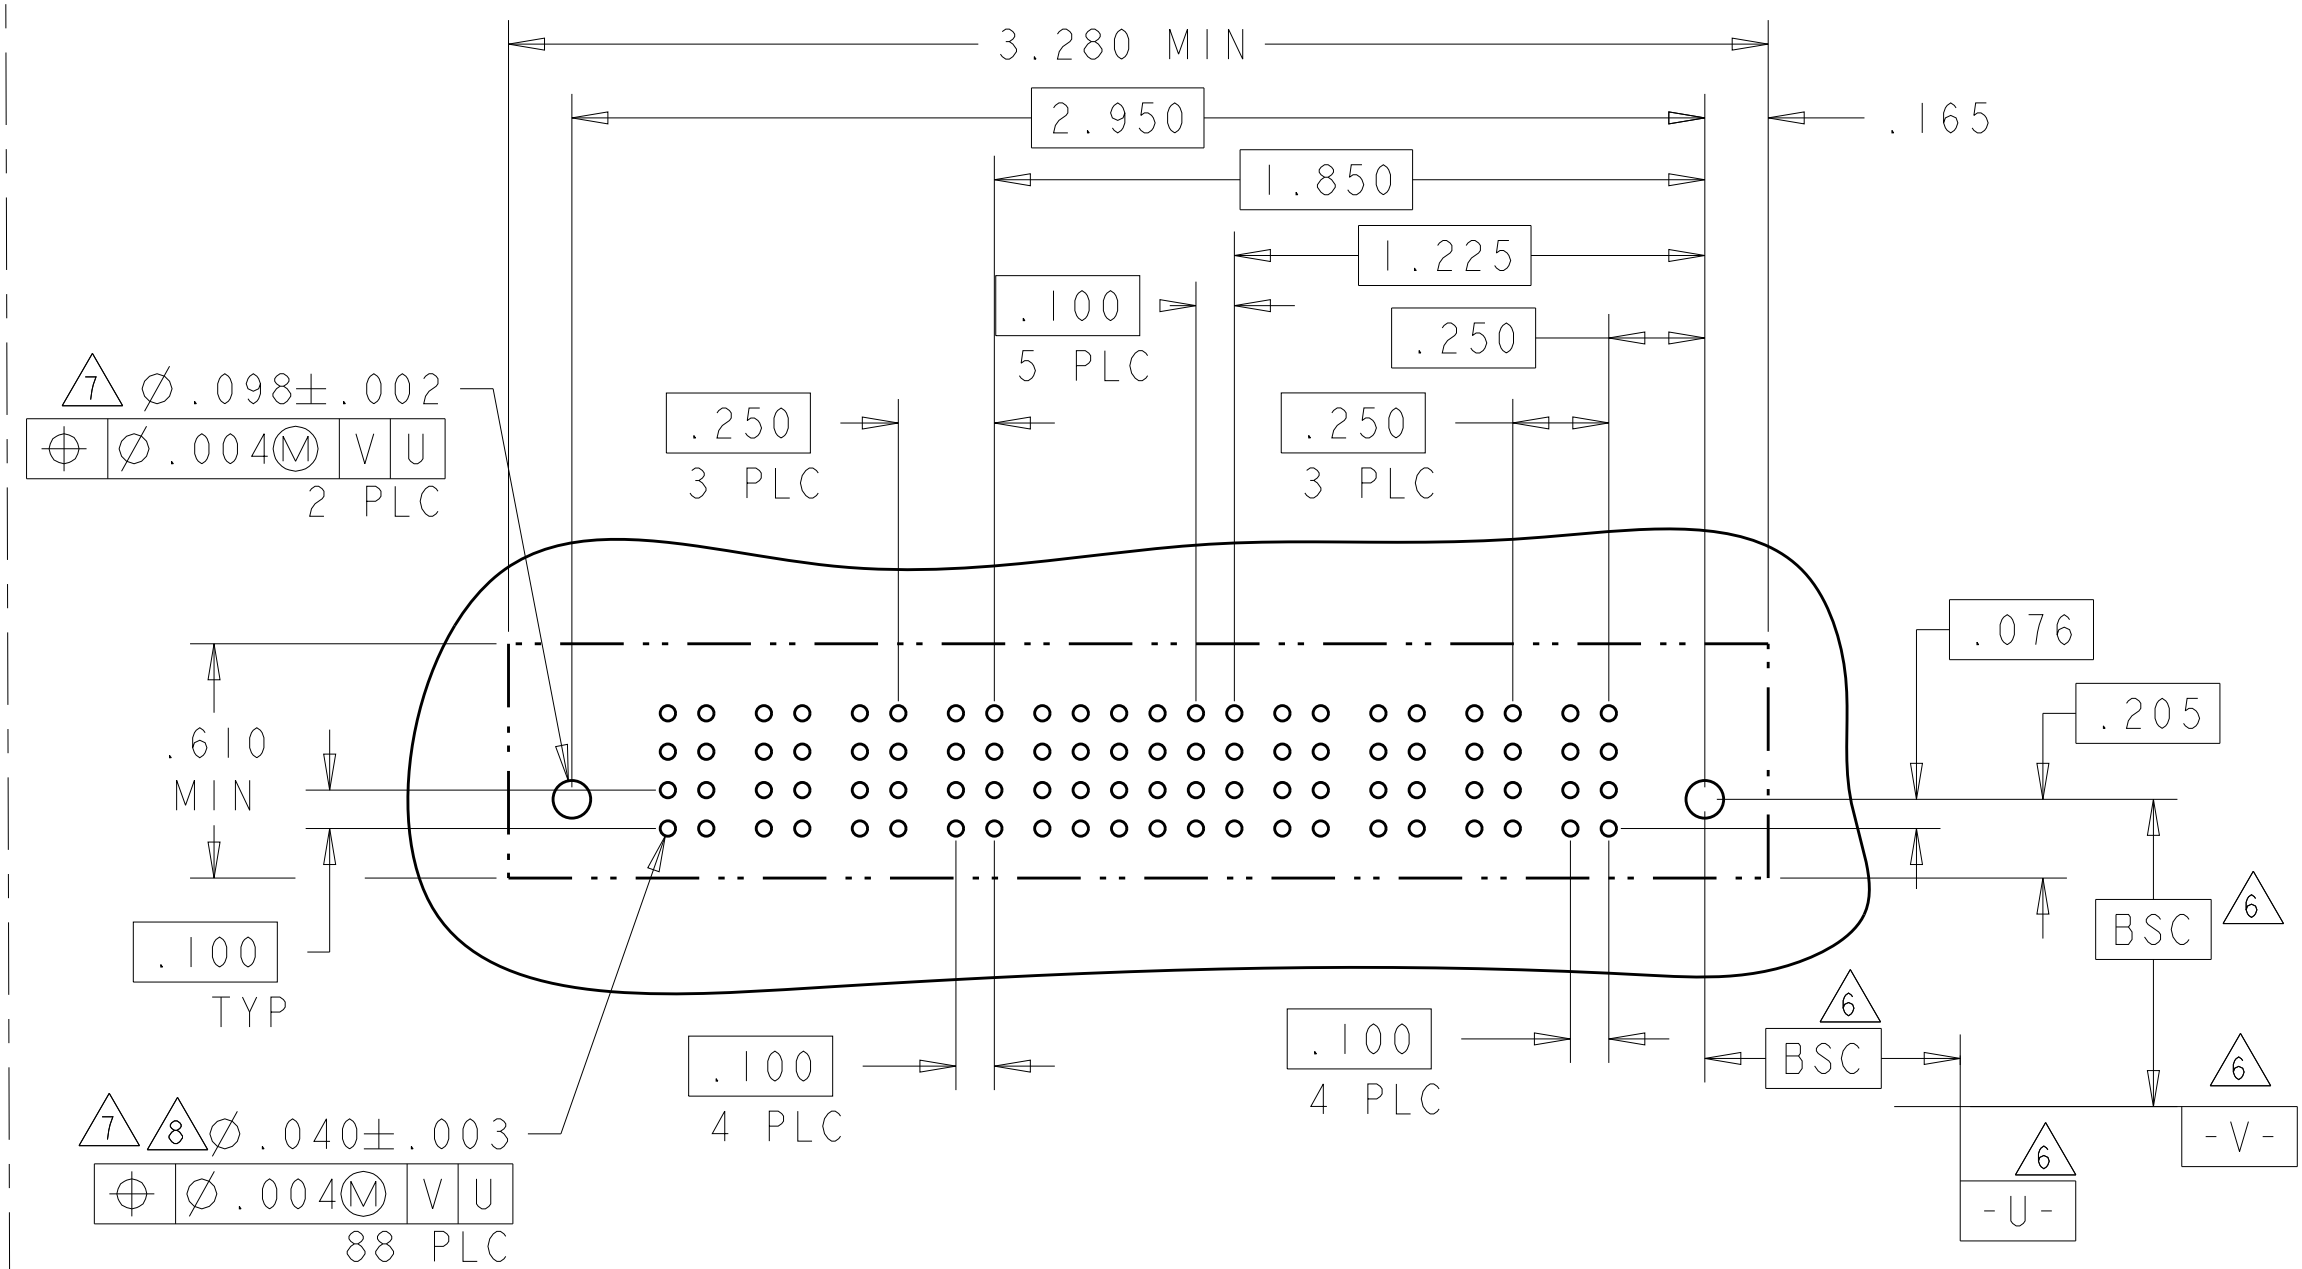
SIZE: A1
CAGE CODE: 100779
DRAWING NO: 6450540
SHEET 12 OF 19
REV K9

RESTRICTED TO: -




TE Connectivity

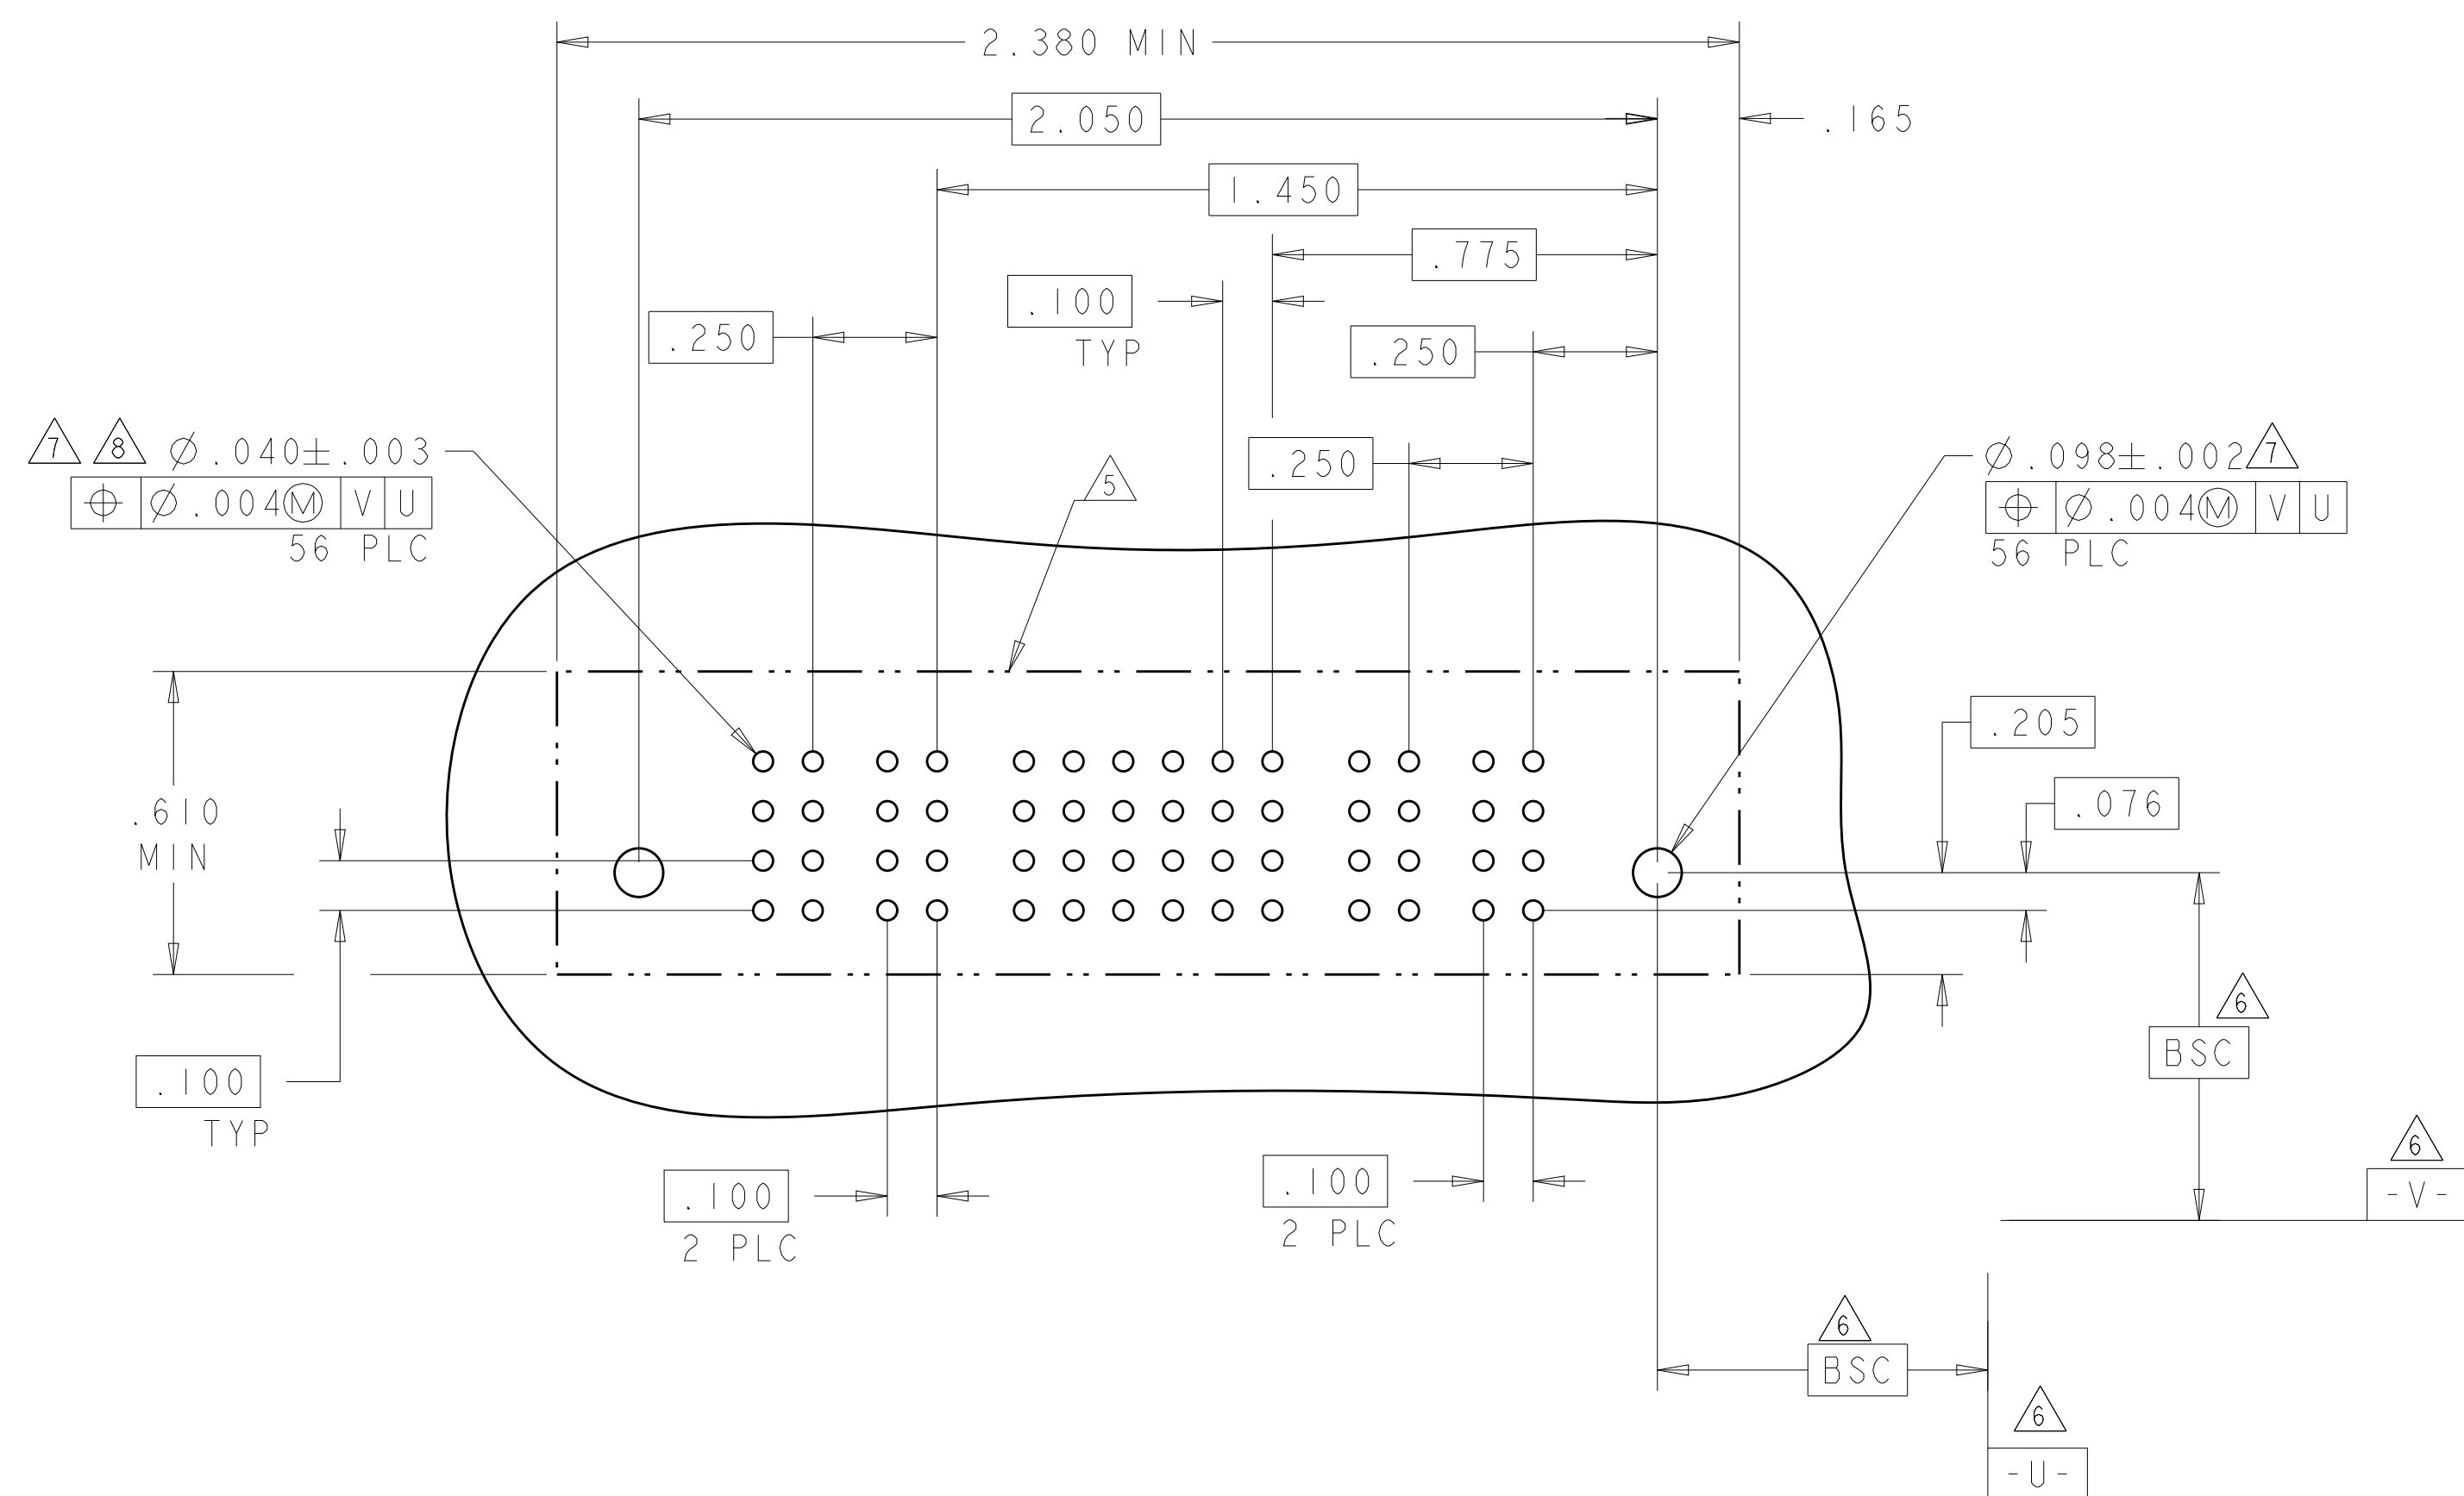
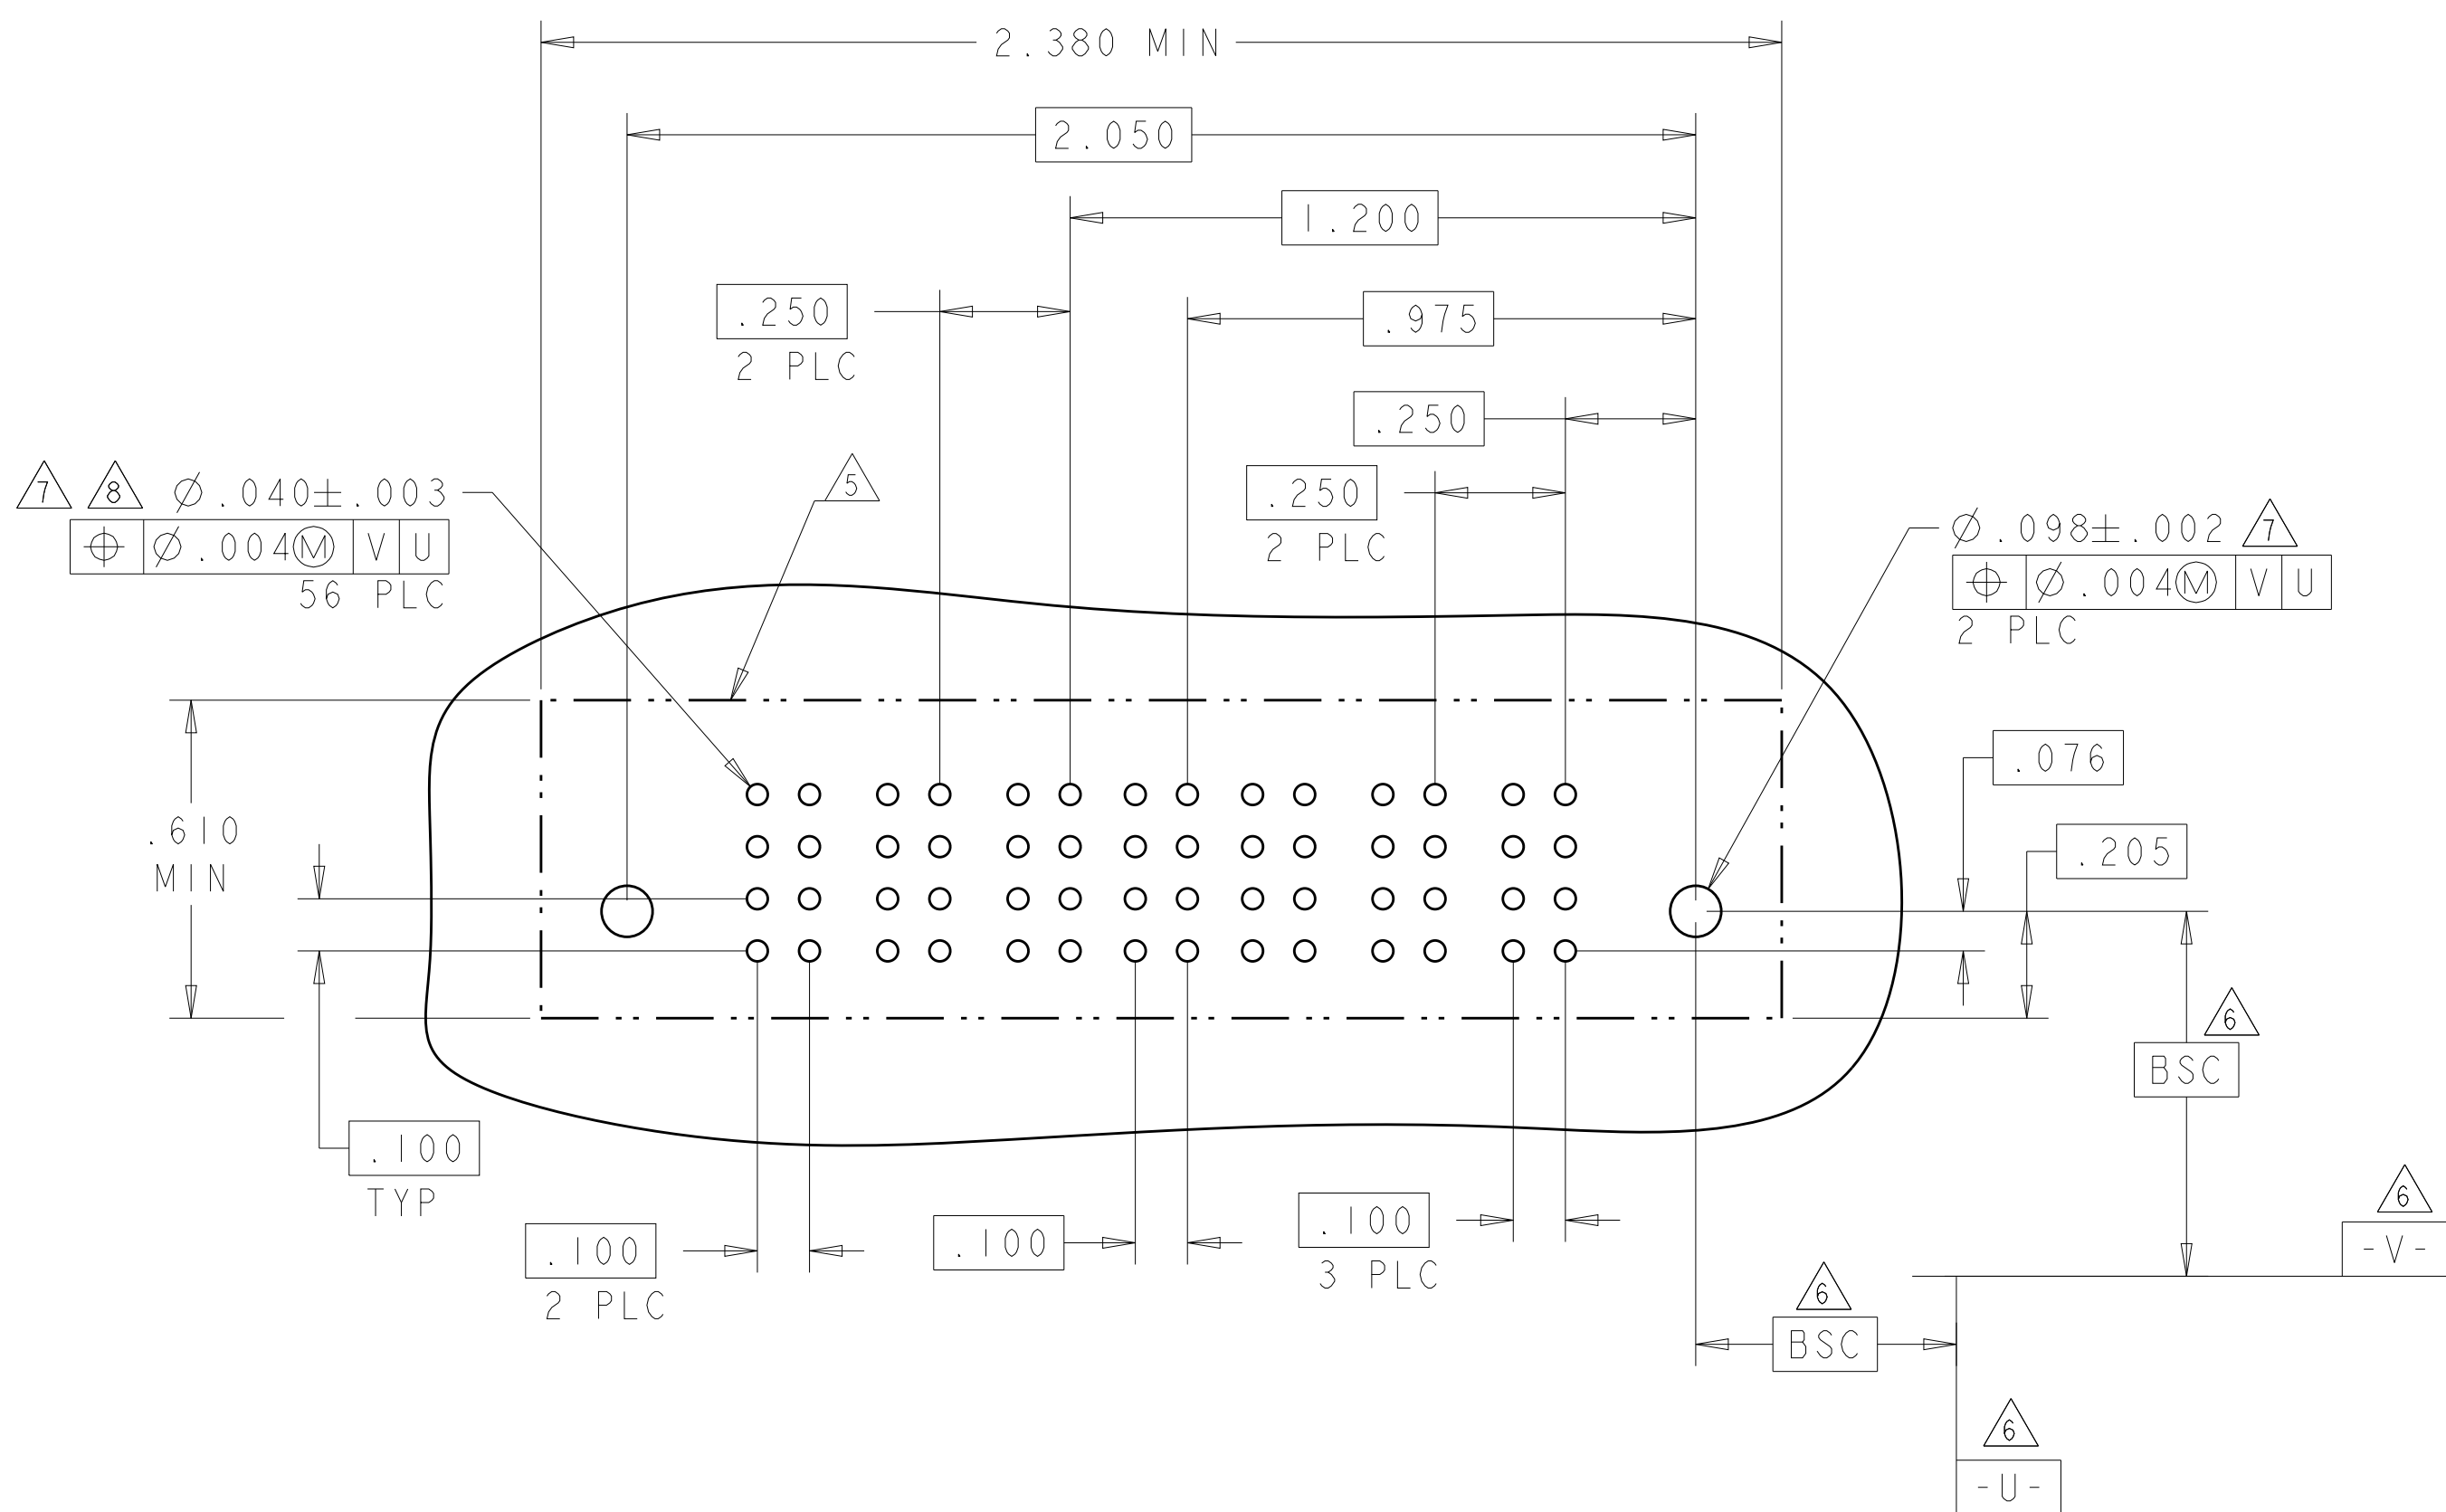
SCALE: 2:1

PART NUMBER	ROWS		POWER				SIGNAL						POWER				
			P8	P7	P6	P5	6	5	4	3	2	1	P4	P3	P2	P1	
5-6450540-3	D C B A					AP	AP	AP	AP	AP	AP						
						AP	AP	AP	AP	AP	AP						
						AP	AP	AP	AP	AP	AP						
						AP	AP	AP	AP	AP	AP						
4P + 24S + 4P																	



THIS DRAWING IS A CONTROLLED DOCUMENT.		DATE R. GRZYBOWSKI 29APR05	 TE Connectivity			
		CHK M. PERCHERRE 29APR05				
DIMENSIONS: INCHES	TO ENRANCES UNLESS OTHERWISE SPECIFIED: 0 P/LC #: 1 P/LC #: 2 P/LC #005 3 P/LC # 0020 ANGLES FINISH	APPROV M. PERCHERRE	NAME VERTICAL RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL	SIZE CAGE CODE DRAWING NO A100779C6450540	RESTRICTED TO -	
		PRODUCT SPEC 108-1973 APPLICATION SPEC 114-13038 WEIGHT -				
MATERIAL		CUSTOMER DRAWING	SCALE 2:1	SHEET 13	OF 19	REV K9

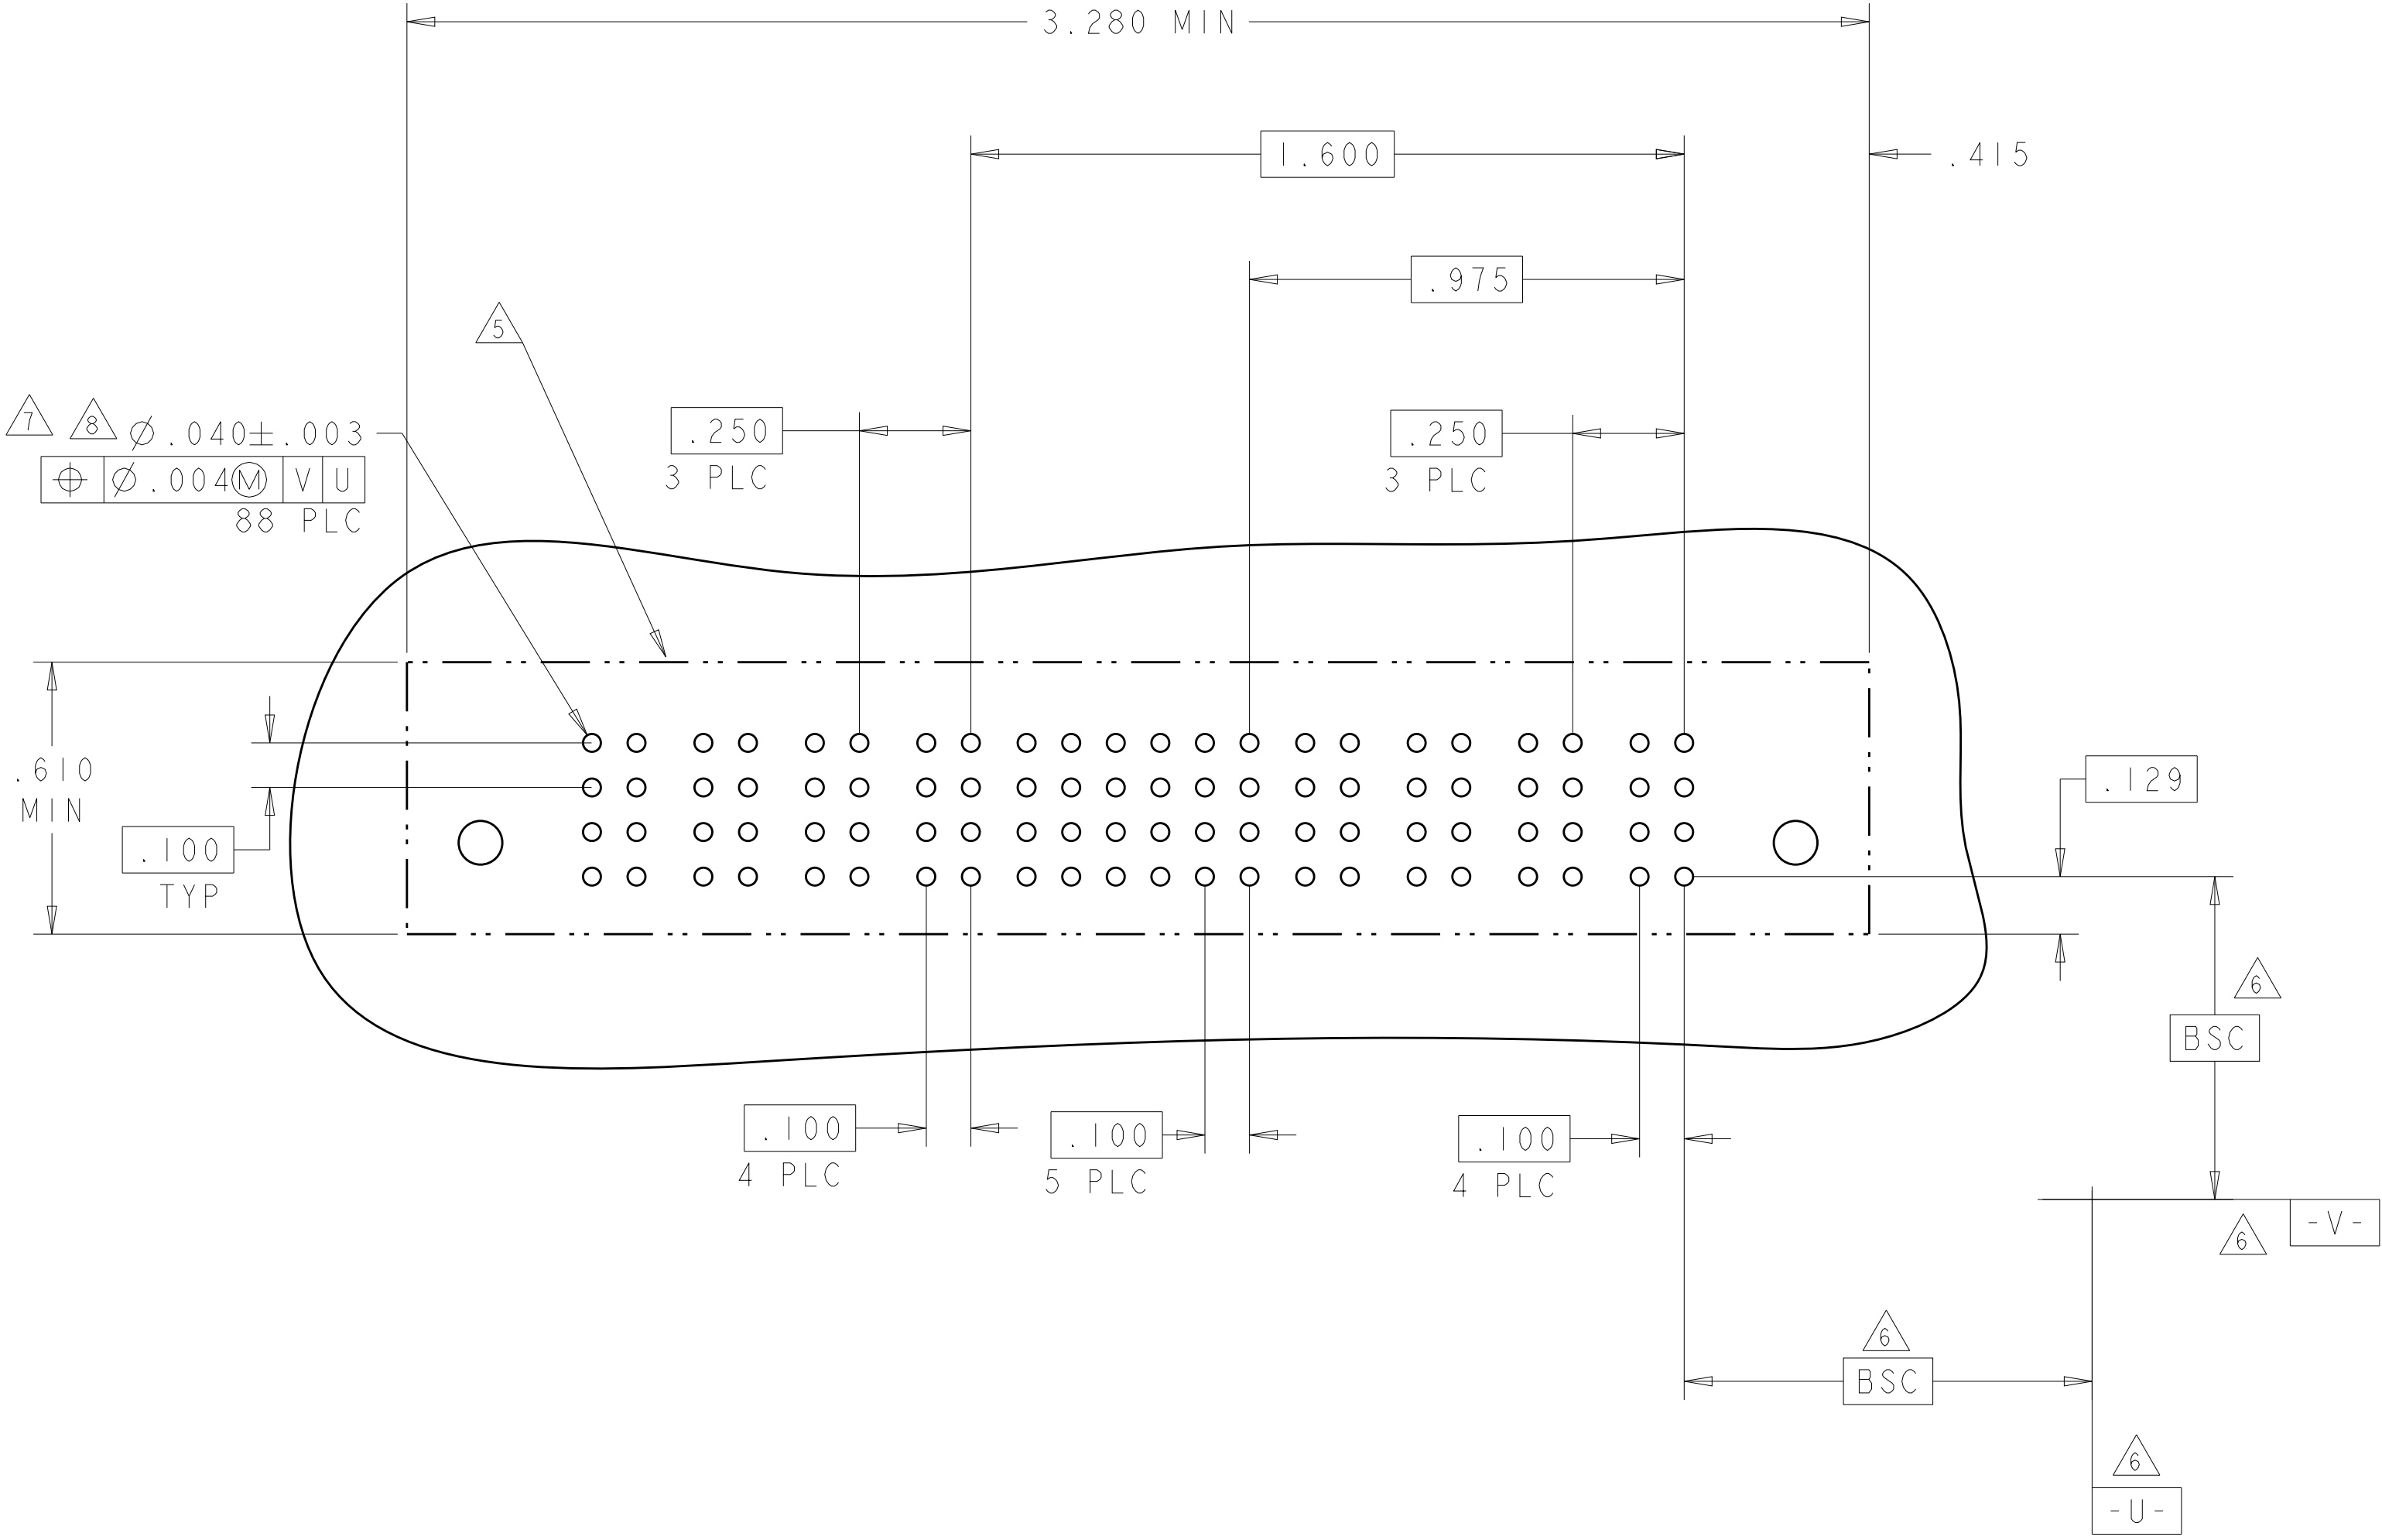
PART NUMBER	ROWS		POWER			SIGNAL		POWER			
			P6	P5	P4	2	1	P3	P2	P1	
5-6450540-5	D C B A										
3P + 8S + 3P											

[illegible]

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN: GRZYBOWSKI 29APR05 CHK: M. PERCHERKE 29APR05		 TE Connectivity	
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED: DECIMALS: ±. FRACTIONS: ±. ANGLES: ±°		NAME: VERTICAL RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL	
		PART NO: M. PERCHERKE PRODUCT SPEC: 108-1973 APPLICATION SPEC: 114-13038 WEIGHT: -		SIZE: CAGE CODE: DRAWING NO: 100779 RESTRICTED TO: -	
MATERIAL: FINISH:		CUSTOMER DRAWING:		SCALE: 2:1 SHEET: 14 OF 19 REV: K	

LOC		DIST		REVISIONS					
ES		00		P	LTR	DESCRIPTION			DATE
					-	SEE SHEET 1			-

PART NUMBER	ROWS		POWER				SIGNAL							POWER				
			P8	P7	P6	P5	6	5	4	3	2	1	P4	P3	P2	P1		
6-6450540-0	D C B A		GS	GS	GS	GS	AP	AP	AP	AP	AP	AP	GS	GS	GS	GS		
							AP	AP	AP	AP	AP	AP						
							AP	AP	AP	AP	AP	AP						
							AP	AP	AP	AP	AP	AP						
4P + 24S + 4P																		



THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

R. GRZYBOWSKI

29APR05

CHK

M. PERCHERKE

29APR05

APVD

M. PERCHERKE

-

DIMENSIONS:

INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±.01

1 PLC ±.01

2 PLC ±.01

3 PLC ±.005

4 PLC ±.0020

ANGLES ±2°

FINISH

MATERIAL

CUSTOMER DRAWING

PRODUCT SPEC

108-1973

APPLICATION SPEC

114-13038

WEIGHT

-

NAME

VERTICAL RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL

SIZE

A1

CAGE CODE

00779

DRAWING NO

6450540

RESTRICTED TO

-

TE Connectivity

SCALE

2:1

SHEET

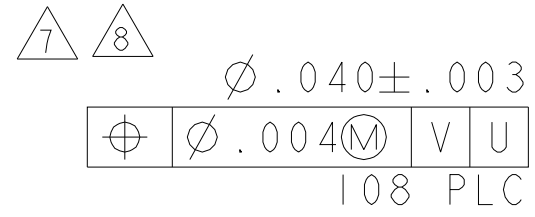
15

OF

19

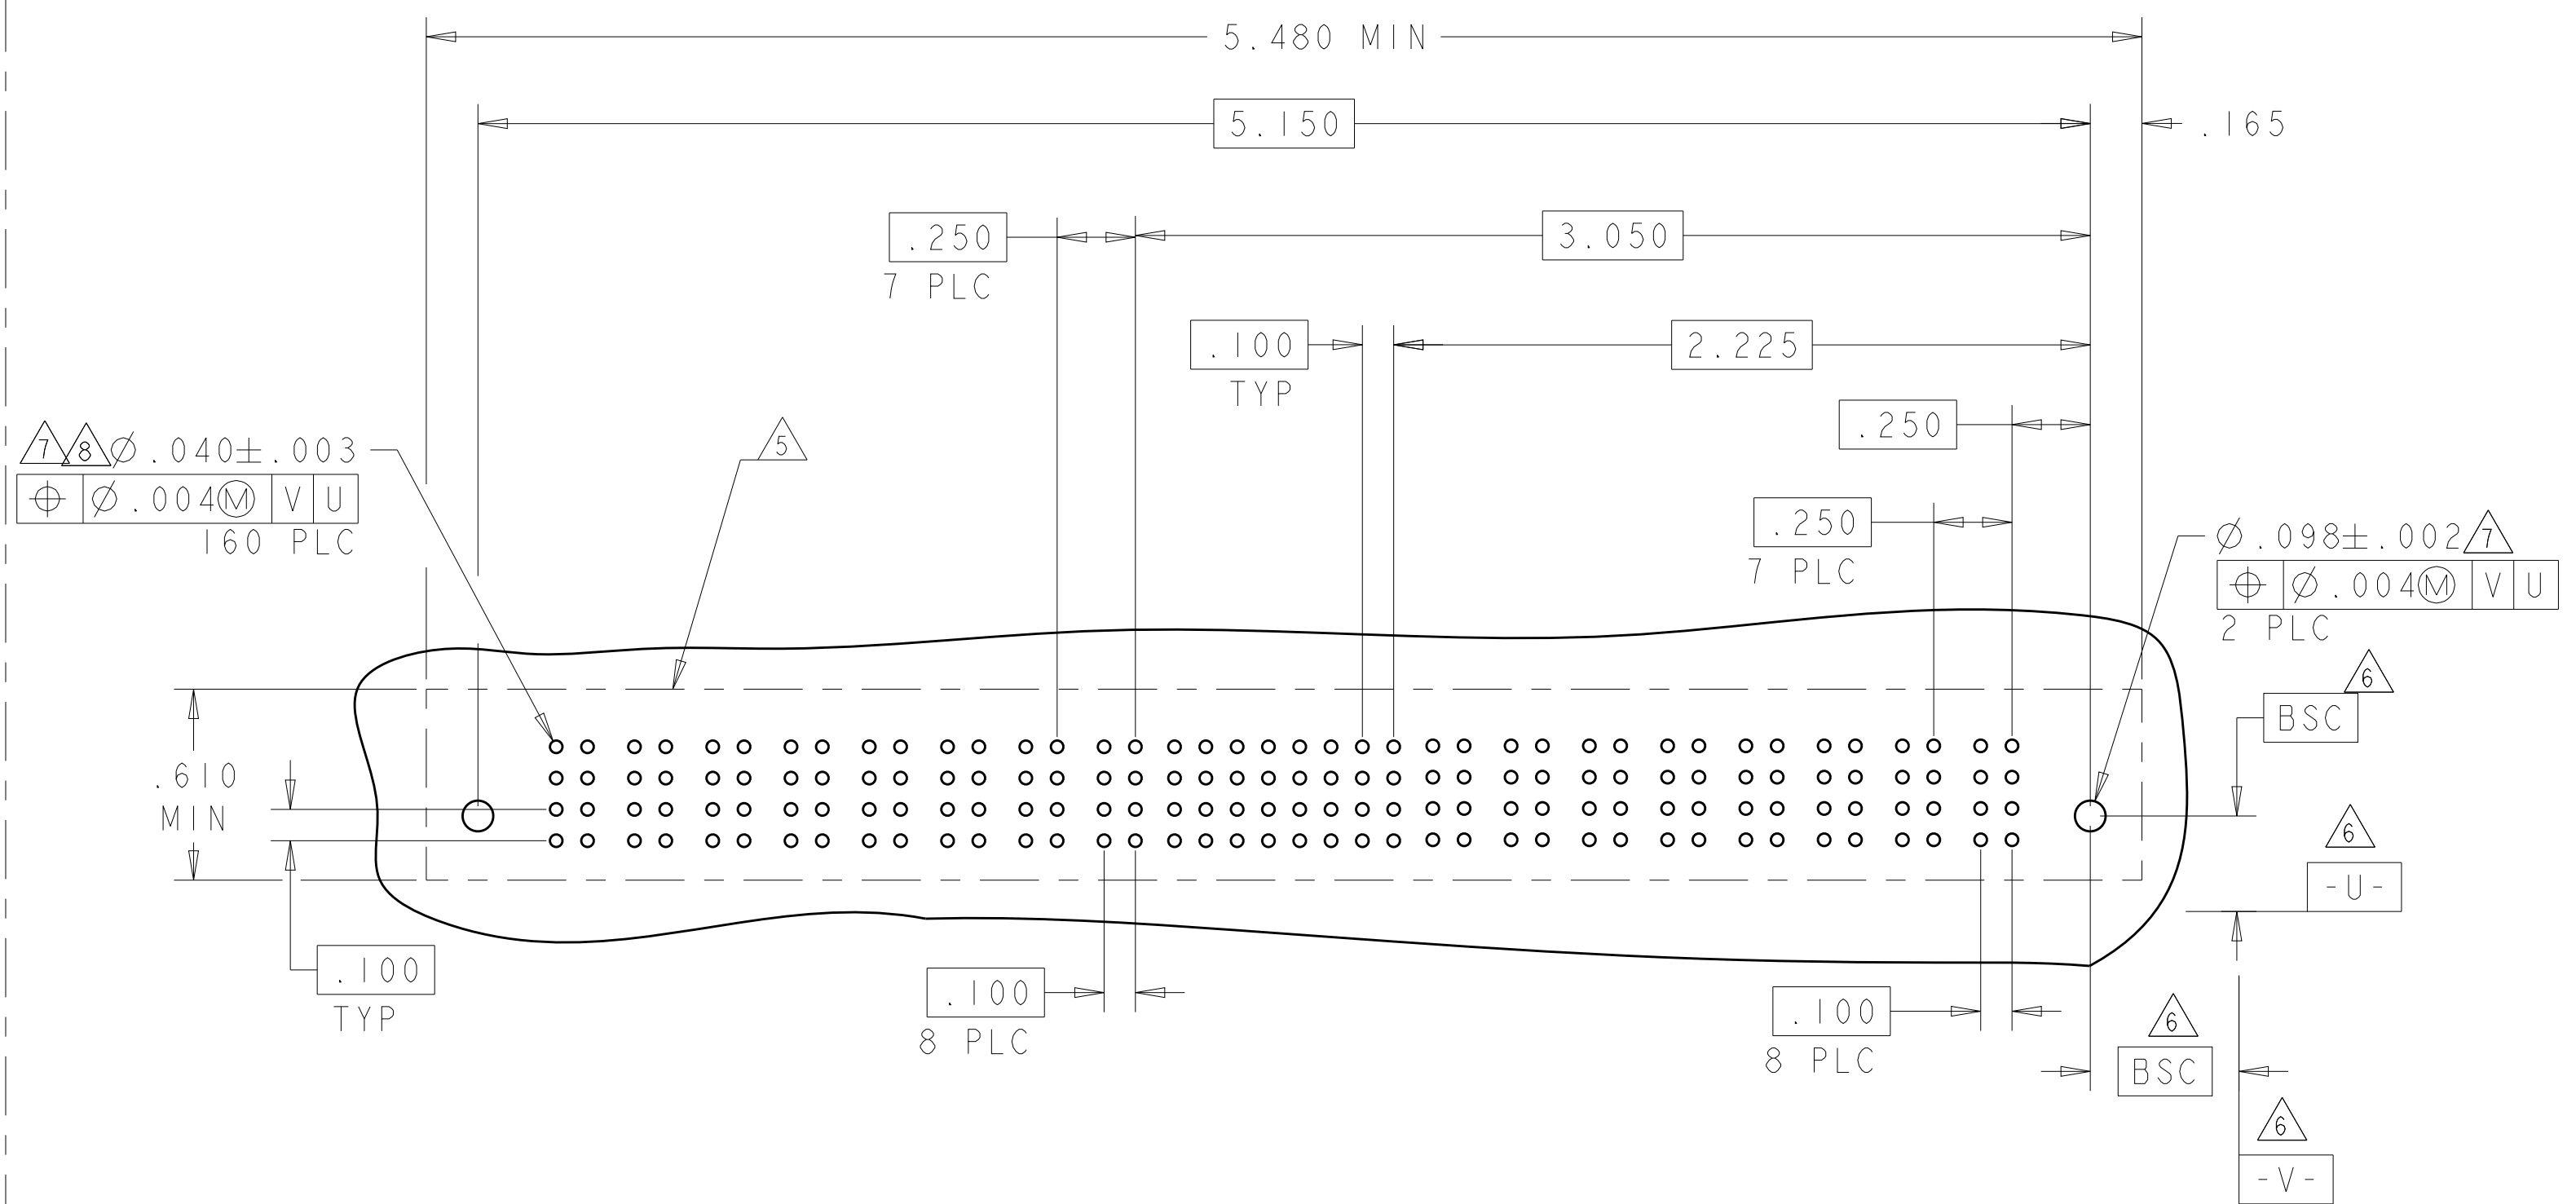
REV


K9

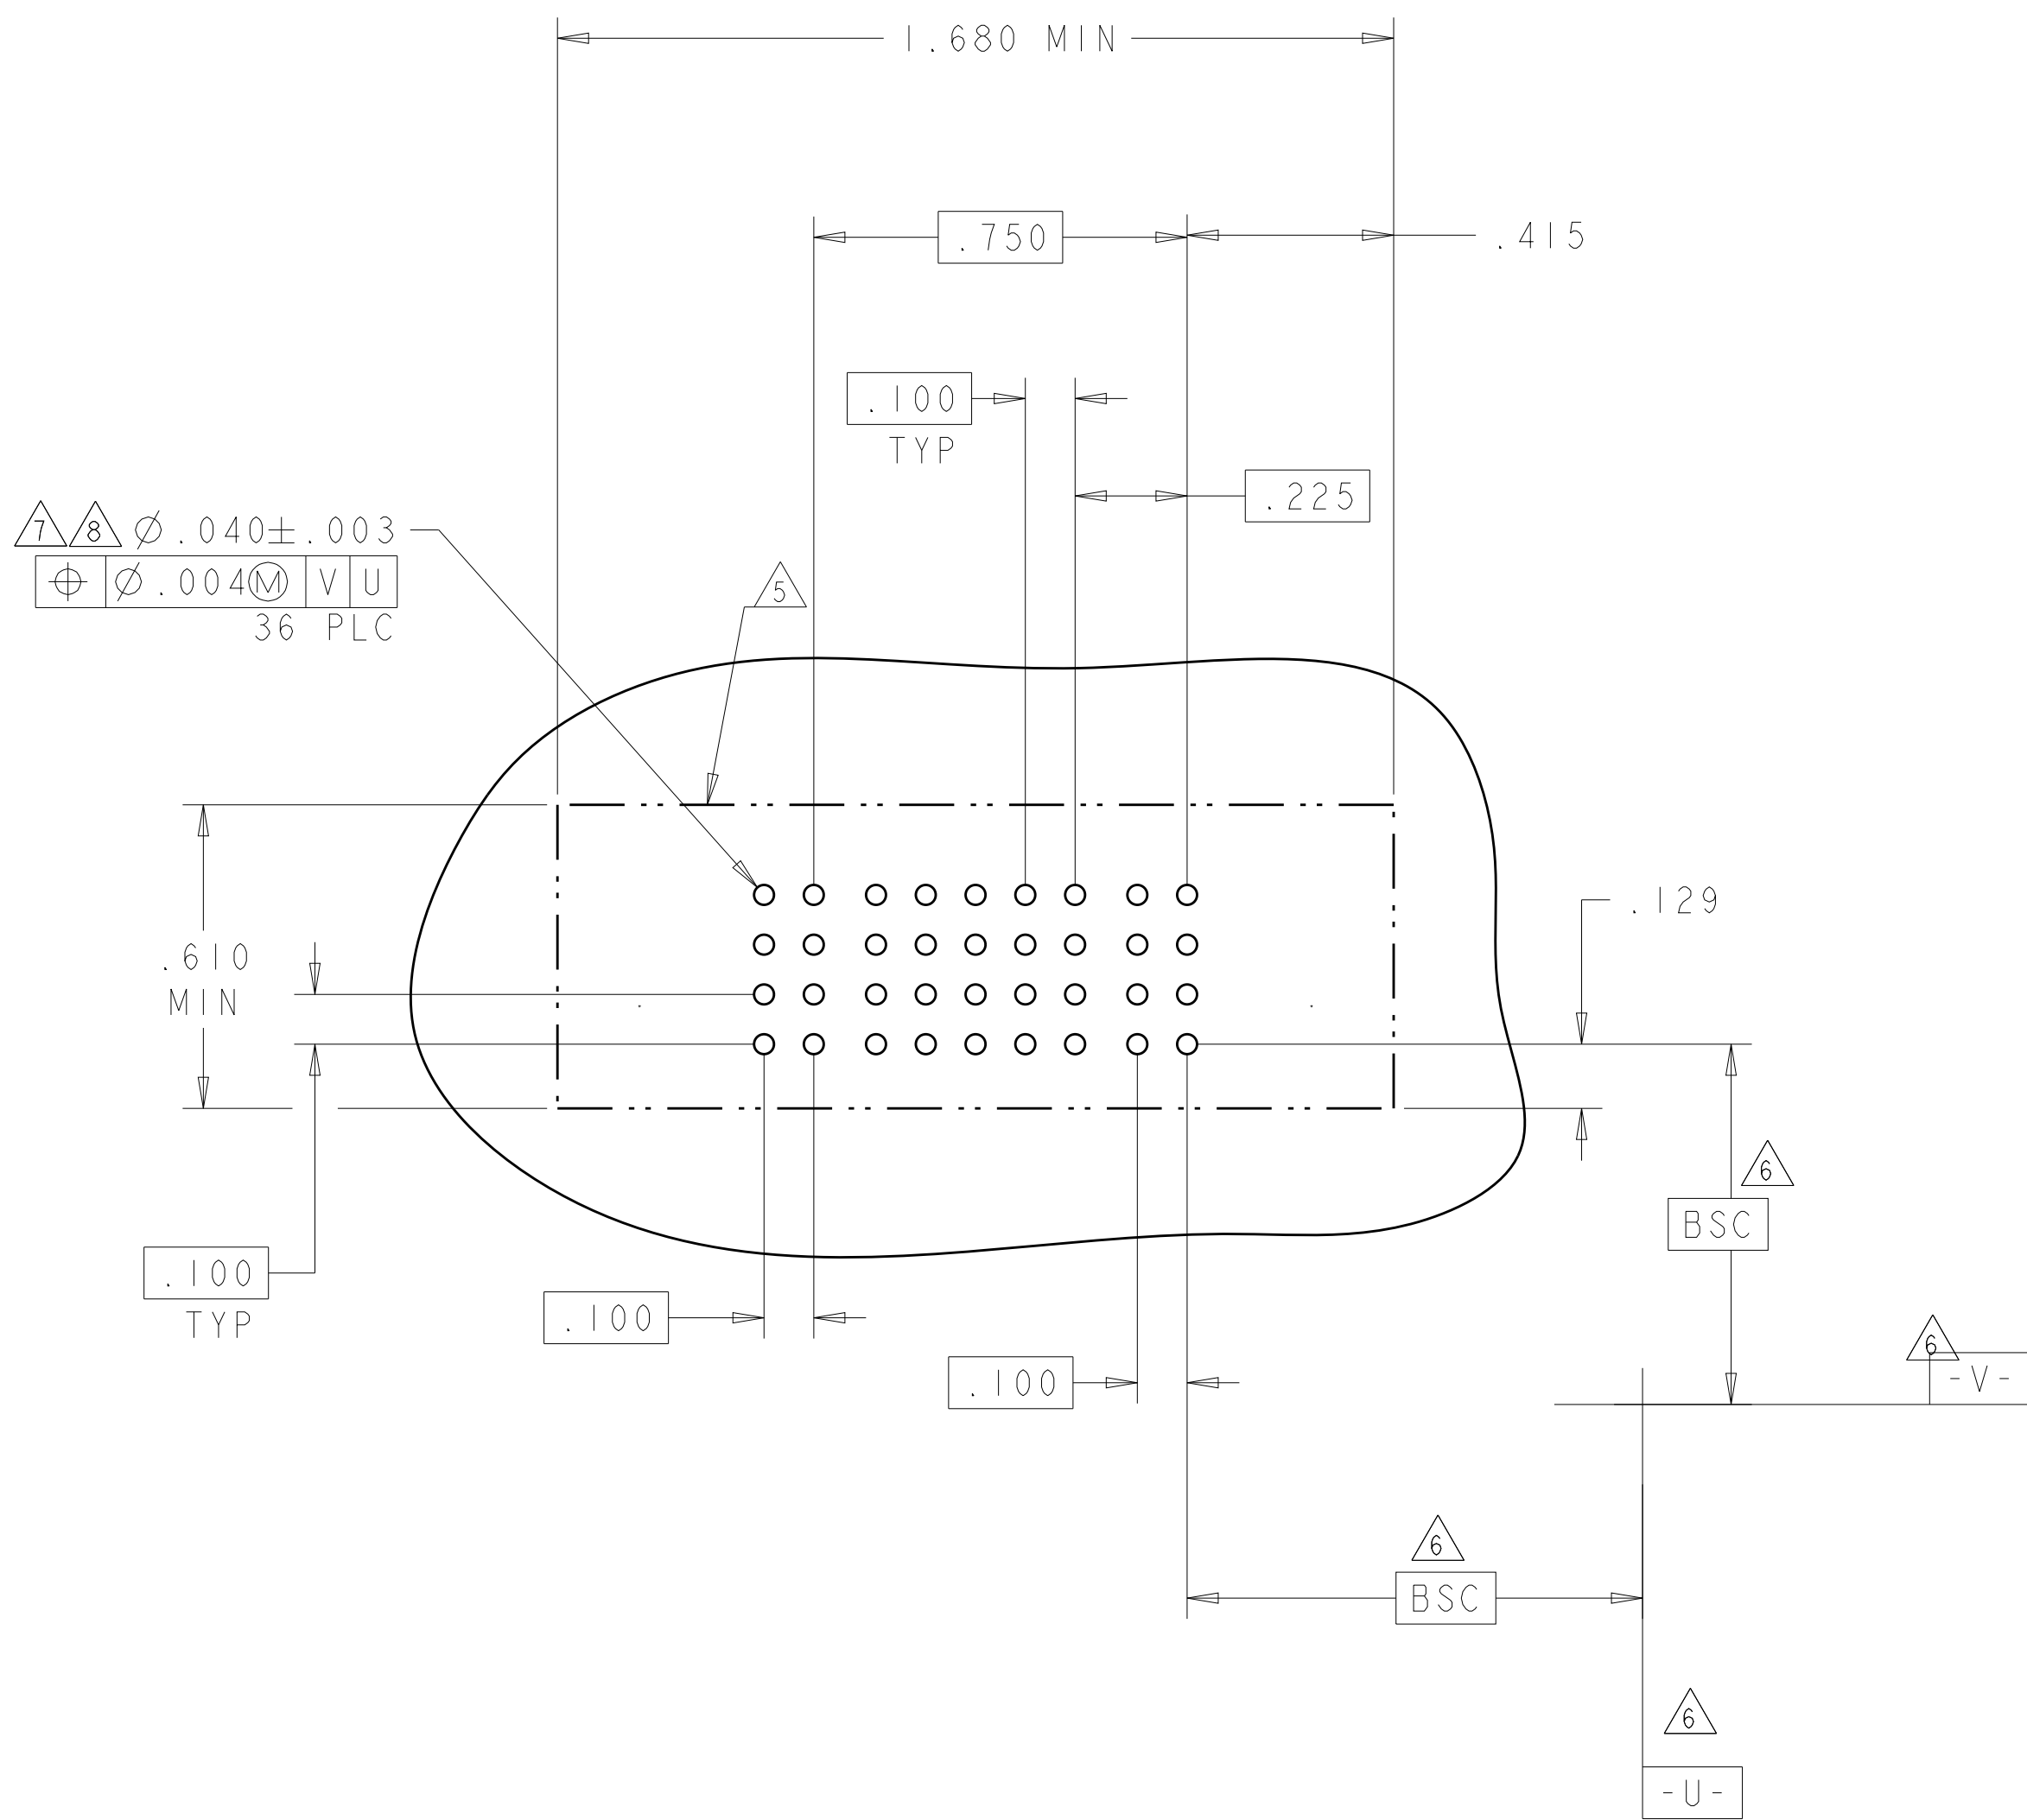
-NO SIGNAL CONTACTS4805 (3/11)

[illegible]4805 (3/11)

PART NUMBER	ROWS		POWER									SIGNAL								POWER								
			P16	P15	P14	P13	P12	P11	P10	P9	8	7	6	5	4	3	2	1	P8	P7	P6	P5	P4	P3	P2	P1		
4-6450540-9	D		GS	GS	GS	GS	GS	GS	GS	GS	AP	AP	AP	AP	AP	AP	AP	GS	GS	GS	GS	GS	GS	GS	GS			
	C										AP	AP	AP	AP	AP	AP	AP										AP	
	B										AP	AP	AP	AP	AP	AP	AP										AP	AP
	A										AP	AP	AP	AP	AP	AP	AP										AP	AP
8P + 32S + 8P																												

4805 (3/11)

PART NUMBER	ROWS		POWER	S I G N A L						POWER																									
			P2	5	4	3	2	1	P1																										
6-6450540-6	D C B A			<table><tr><td>AP</td><td>AP</td><td>AP</td><td>AP</td><td>AP</td><td>AP</td></tr><tr><td>AP</td><td>AP</td><td>AP</td><td>AP</td><td>AP</td><td>AP</td></tr><tr><td>AP</td><td>AP</td><td>AP</td><td>AP</td><td>AP</td><td>AP</td></tr><tr><td>AP</td><td>AP</td><td>AP</td><td>AP</td><td>AP</td><td>AP</td></tr></table>						AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP		
AP	AP	AP	AP	AP	AP																														
AP	AP	AP	AP	AP	AP																														
AP	AP	AP	AP	AP	AP																														
AP	AP	AP	AP	AP	AP																														
IP + 20S + IP																																			

4805 (3/11)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5-6450540-9](#)