

4

3



2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
AG	53	B	REV PER ECO-09-026264	09MAR2010	HMR DB

- 1 MATERIAL: EYELET-COPPER PER ASTM B 152
SPRING-BERYLLIUM COPPER
PER ASTM B 194
- 2 TIN PLATE PER ASTM B 545 .000100
MIN THICK.
- 3 NICKEL UNDERPLATE ALL OVER, MATING SURFACE PLATED
TO MEET PERFORMANCE REQUIREMENTS OF TYCO PRODUCT
SPECIFICATION 108-14008.
- 4. RECOMMENDED HOLE SIZE FOR MACHINE
INSERTION .069-.075.

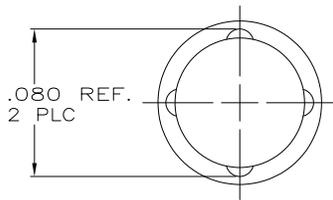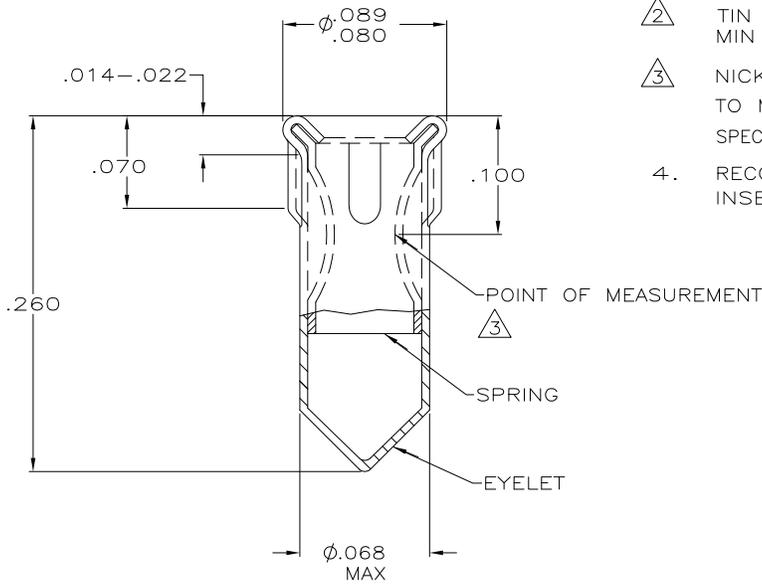

.037-.041	.100-.210	2	2	5645500-2
		3		5645500-1
DIA	LENGTH	SPRING	EYELET	PART NUMBER
PIN		FINISH		

DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		DWN		G. ATTADIA - DOCK5		Tyco Electronics		Tyco Electronics Corporation	
INCHES				20APR2005		20APR2005		Harrisburg, PA 17105-3608			
0 PLC		± -		CHK		J. HAVENER		NAME		SOCKET, MSS, SERIES 4	
1 PLC		± -		APVD		J. HAVENER		PRODUCT SPEC			
2 PLC		± -		APPLICATION SPEC				SIZE		CAGE CODE	
3 PLC		± .010		WEIGHT		-		A3		00779	
4 PLC		± -		FINISH		SEE TABLE		DRAWING NO		C-5645500	
ANGLES		± -		MATERIAL		1		RESTRICTED TO		-	
				CUSTOMER DRAWING				SCALE		NTS	
								SHEET		1 of 1	
								REV		B	