


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [75757-0233](#)
Status: **Active**
Overview: MX150™ Unshrouded Breakaway Header
Description: 3.50mm Pitch, MX150™ Header, Breakaway, Vertical, 3 Circuits, 1.25µm Nickel (Ni) Overall, 2.50µm Minimum Select Matte Tin (Sn) Plating on Tail, 0.05µm Minimum Select Gold (Au) Contact Area, 16.09mm Mating Pin Length, 3.05m

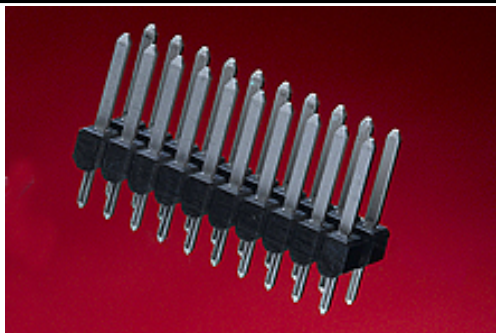

Series

image - Reference only

Documents:

- [3D Model](#)
- [Drawing \(PDF\)](#)
- [Product Specification PS-75757-000 \(PDF\)](#)
- [Test Summary TS-75757-001 \(PDF\)](#)
- [RoHS Certificate of Compliance \(PDF\)](#)

General

Product Family	PCB Headers
Series	75757
Application	Power, Wire-to-Board
Overview	MX150™ Unshrouded Breakaway Header
Product Name	MX150™
UPC	884982698314

Physical

Breakaway	Yes
Circuits (Loaded)	3
Circuits (maximum)	3
Color - Resin	Black
Durability (mating cycles max)	25
First Mate / Last Break	No
Glow-Wire Compliant	No
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	None
Material - Metal	Brass
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	0.801/g
Number of Rows	1
Orientation	Vertical
PC Tail Length	3.05mm
PCB Locator	No
PCB Retention	None
PCB Thickness - Recommended	1.57mm
Packaging Type	Tube
Pitch - Mating Interface	3.50mm
Pitch - Termination Interface	3.50mm
Plating min - Mating	0.051µm
Polarized to Mating Part	No
Polarized to PCB	No
Shrouded	No
Surface Mount Compatible (SMC)	Yes
Temperature Range - Operating	-40°C to +125°C
Termination Interface: Style	Through Hole

Electrical

Current - Maximum per Contact	16A
Voltage - Maximum	500V DC

EU RoHS

**ELV and RoHS
Compliant**
**REACH SVHC
Contains SVHC: No
Low-Halogen Status
Low-Halogen**

China RoHS



**Need more information on product
environmental compliance?**

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of
Compliance, [click here](#)

Please visit the [Contact Us](#) section for any
non-product compliance questions.

Search Parts in this Series

[75757Series](#)

Mates With

[33471](#) Single Row MX150™ Receptacles,
[33472](#) Dual Row MX150™ Receptacles

Solder Process Data

Duration at Max. Process Temperature (seconds)	5
Lead-free Process Capability	Wave Capable (TH only)
Max. Cycles at Max. Process Temperature	1
Process Temperature max. C	245

Material Info

Reference - Drawing Numbers

Product Specification	PS-75757-000
Sales Drawing	AS-75757-103, SD-75757-010, SD-75757-0444
Test Summary	TS-75757-001

This document was generated on 06/26/2013

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION