

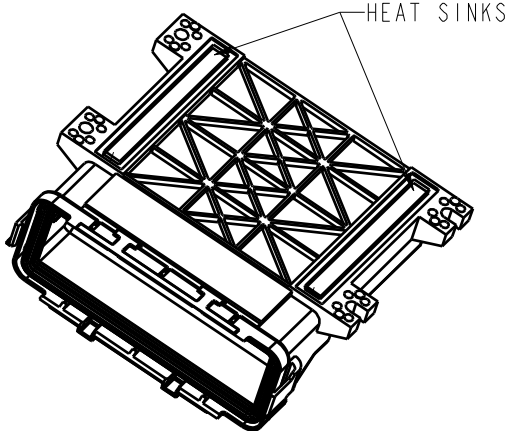
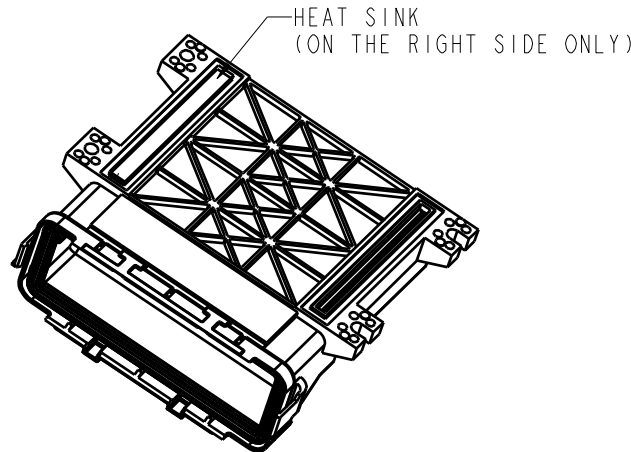
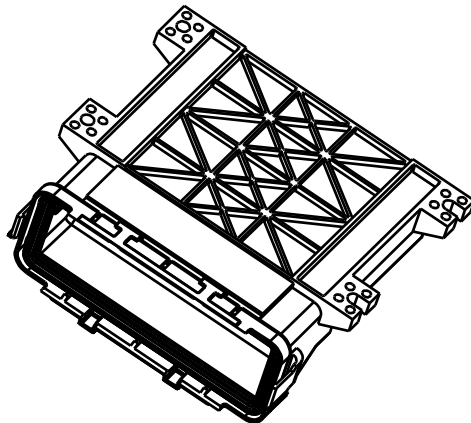
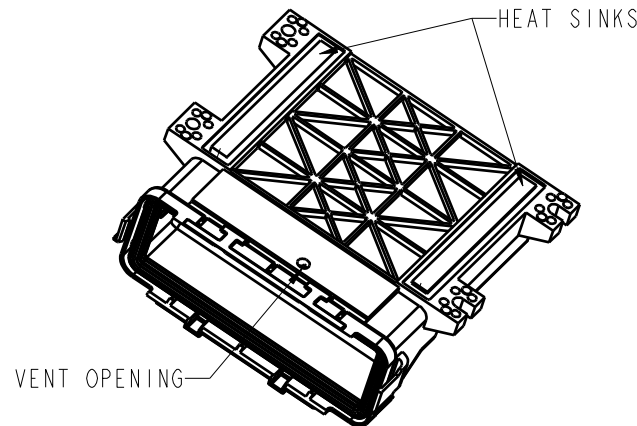
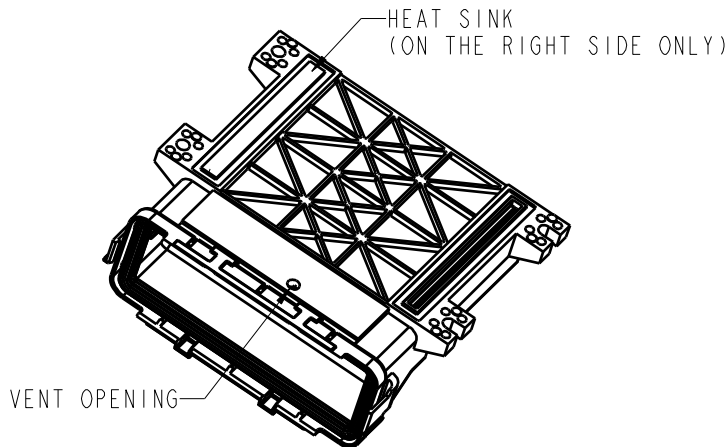
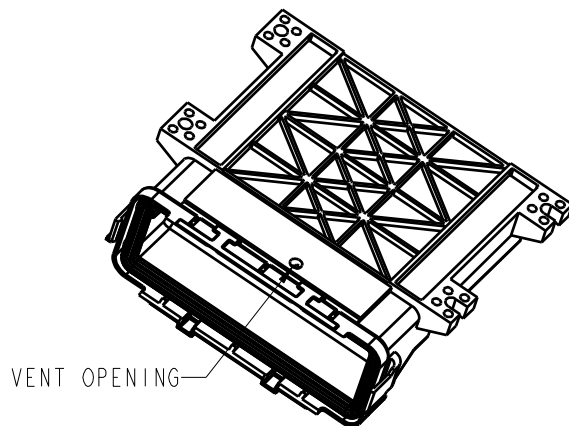
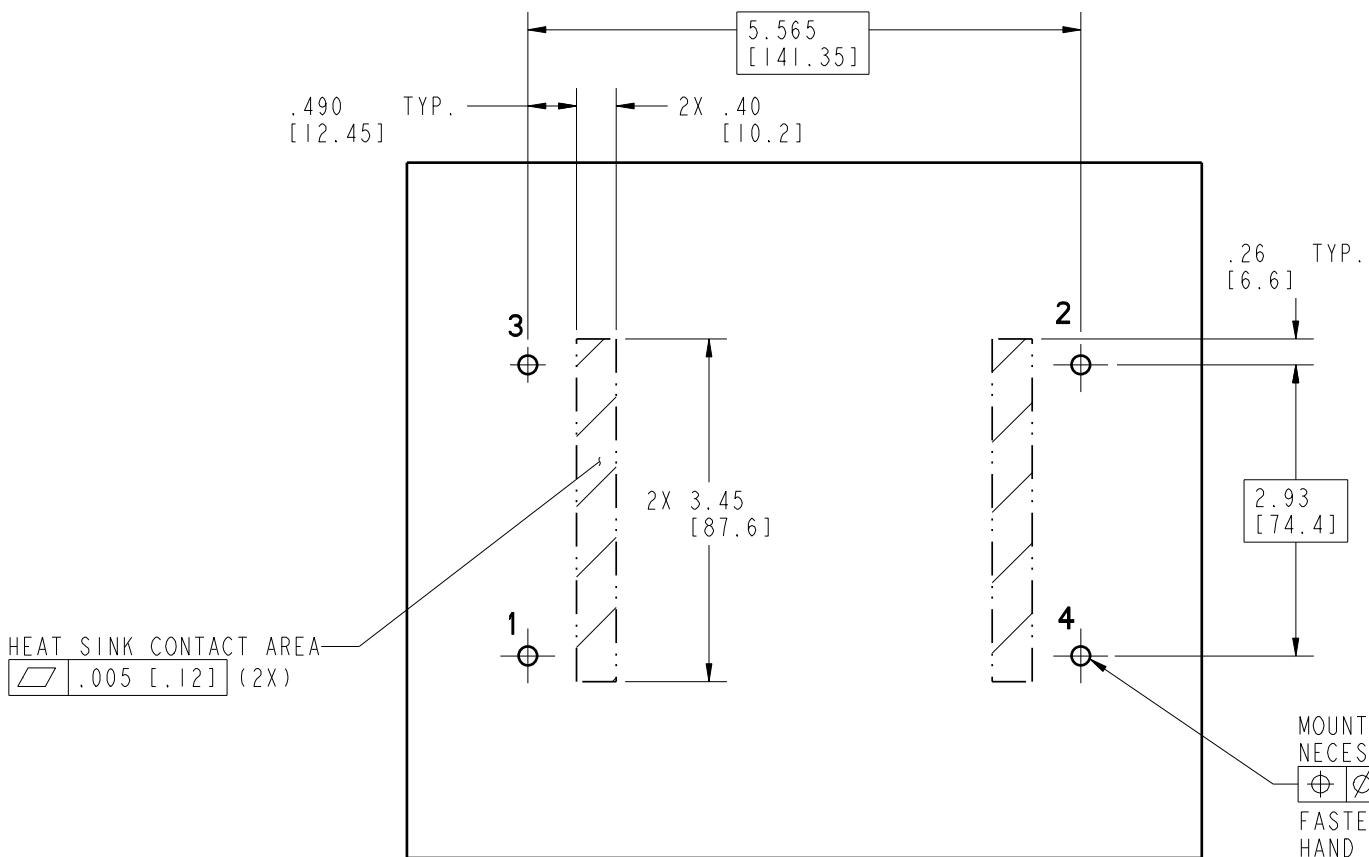
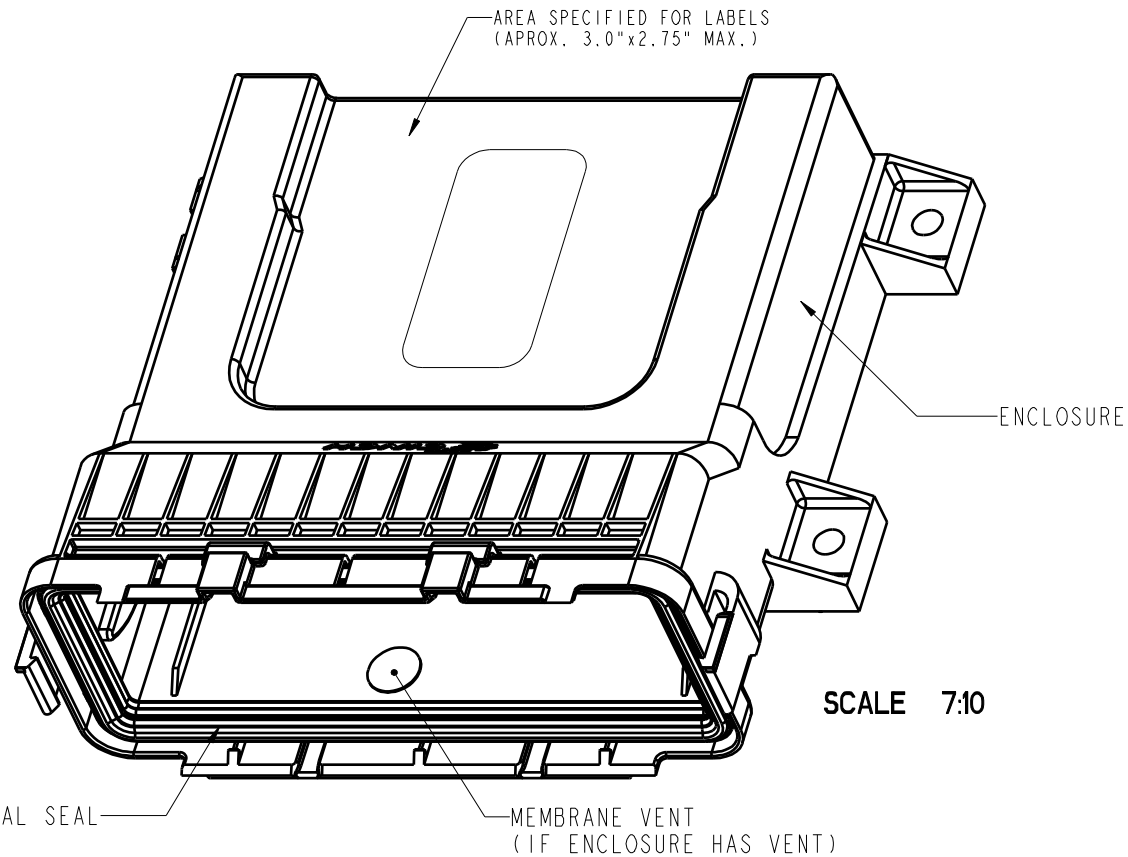


8		7		6		5		4		3		2		1			
CINCH PART NUMBER MATRIX														DRAWING REVISIONS			
P/N: 581 01 30 041 ENCLOSURE WITH TWO HEAT SINKS  P/N: 581 01 30 042 ENCLOSURE WITH ONE HEAT SINK  P/N: 581 01 30 043 ENCLOSURE WITHOUT HEAT SINKS  P/N: 581 01 30 057 ENCLOSURE WITH TWO HEAT SINKS & MEMBRANE VENT  P/N: 581 01 30 058 ENCLOSURE WITH ONE HEAT SINK & MEMBRANE VENT  P/N: 581 01 30 059 ENCLOSURE WITHOUT HEAT SINKS & MEMBRANE VENT  NOTE: 1. ALL DIMENSIONS ARE IN INCHES; DIMENSIONS IN [.XX] ARE IN mm AS REF. ONLY. 2. MATERIALS: ENCLOSURE: 30 % GLASS FILLED POLYMER, COLOR BLACK; PERIPHERAL SEAL: SILICONE RUBBER, COLOR BLUE. HEAT SINK: ANODIZED ALUMINUM ALLOY. 3. HEADERS ARE SOLD SEPARATELY (CONSULT FACTORY FOR P/N); FOR PCB SIZE AND REQUIREMENTS REFER TO HEADER DRAWINGS. 4. STANDARD PACKAGE SIZE: 21 PARTS / CARTON BOX. UNITS ENGLISH DO NOT SCALE DRAWING UNLESS OTHERWISE SPECIFIED: ALL DIMENSIONS ARE IN INCHES FILLET/RADII .02 MAX TOLERANCES AND LIMITS APPLY OVER ADDITIVE FINISH THIS DOCUMENT IS THE PROPERTY OF CINCH. NEITHER THIS DOCUMENT NOR ANY OF THE INFORMATION CONTAINED IN IT MAY BE DUPLICATED OR DISCLOSED WITHOUT PRIOR WRITTEN CONSENT OF CINCH. PRO/E DRAWN BY B. KOSTIC DESIGN ENGINEER B. KOSTIC DESIGN ENGINEERING MGR. A. CAINES MFG. ENGINEERING R. GARZA QUALITY ASSURANCE R. QUIROZ DATE 09/14/04 DATE 09/14/04 DATE 10/15/04 DATE 10/28/04 DATE 10/28/04 TITLE ENCLOSURE ASSEMBLY MODICE SE MATERIAL SEE NOTE 2. MATERIAL SPEC NUMBER CAD FILE NUMBER 5810130041S.ICE30 CAGE IDENT NO. 71785 SIZE B SCALE 3:10 SHEET 1 OF 2 RoHS COMPLIANT MODELED BY: B.K. 1700 FINLEY RD LOMBARD, IL. 60148 Cinch ENCLOSURE ASSEMBLY MODICE SE CONTROL SPEC NUMBER PROJECT NUMBER A 14562 DRAWING NUMBER 581 01 30 041S																	

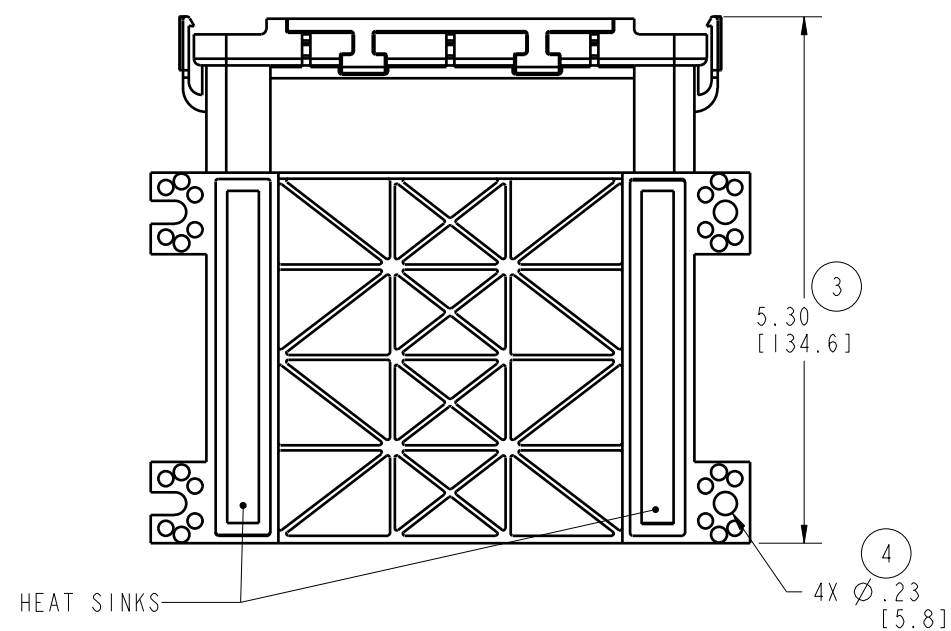

MOUNTING BRACKET LAY-OUT

MOUNTING HOLES. HOLE SIZING AND / OR TAPPING AS NECESSARY FOR CUSTOMER MOUNTING HARDWARE
 $\varnothing \varnothing .005 [.12] A$
FASTENERS SHOULD BE TIGHTENED BY HAND AT EACH LOCATION, APPLYING EQUAL PRESSURE AGAINST MOUNTING SURFACE IN ALL LOCATIONS, THEN TORQUE TO 10-12 IN. LB. [1.13-1.36 Nm] FOLLOWING THE PATTERN SHOWN.
TORQUE PATTERN: 1, 2, 3, 4

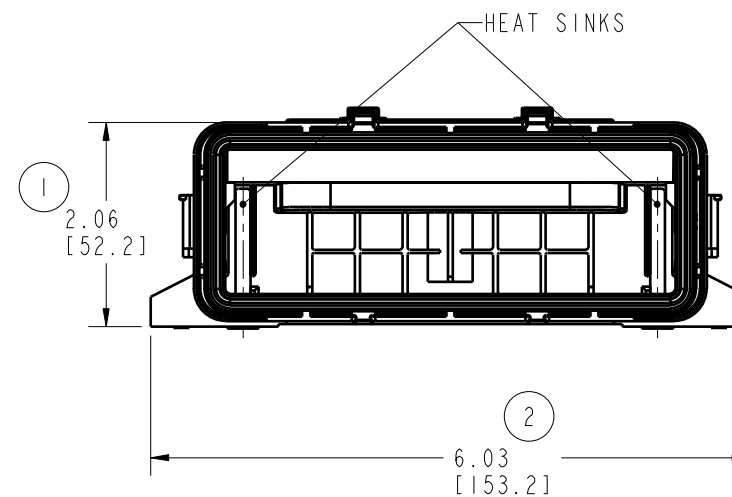

CINCH P/N: 581 01 30 041 SHOWN

UNITS		ENGLISH		Cinch		1700 FINLEY RD LOMBARD, IL. 60148			
DO NOT SCALE DRAWING									
UNLESS OTHERWISE SPECIFIED: ALL DIMENSIONS ARE IN INCHES				TITLE					
FILLET/RADII .02 MAX				ENCLOSURE ASSEMBLY MODICE SE					
TOLERANCES				PRO/E DRAWING					
.X ± .1									
.XX ± .01									
TOLERANCES AND LIMITS APPLY OVER ADDITIVE FINISH				.XXX ± .005					
				ANGULAR ± .5°					
THIS DOCUMENT IS THE PROPERTY OF CINCH. NEITHER THIS DOCUMENT NOR ANY OF THE INFORMATION CONTAINED IN IT MAY BE DUPLICATED OR DISCLOSED WITHOUT PRIOR WRITTEN CONSENT OF CINCH.				CAD FILE NUMBER		DRAWING NUMBER		REV	
				5810130041S_ICE30		581 01 30 041S		D	
				CAGE IDENT NO. SIZE		SCALE			
71785		B		1:2		SHEET 2 OF 2			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Cinch Connectivity Solutions:](#)

[5810130059](#) [5810130057](#) [5810130058](#)