

CURRENT TRANSFORMERS

Model A, B, C &
BB, CB

Window Diameters
1.05", 2.06", 3.00"

APPLICATION:
With ammeters,
energy management systems,
and instrumentation.

FREQUENCY:
50–400 Hz.

INSULATION LEVEL:
600 Volts, 10 kV BIL full wave.

RATING FACTOR:
1.0 @ 30°C.







E93779




E93779

- Fast on connectors are standard 1/4".
- Terminals are 8–32 studs.
- Flexible leads are UL 1015 105 ° C, CSA approved, #16 AWG, 24" long.
- Non-standard length to be specified.
- Approximate weights:
Model A – 0.5 lb.
Model B – 0.6 lb.
Model C – 0.9 lb.
Model BB – 0.6 lb.
Model CB – 0.9 lb.

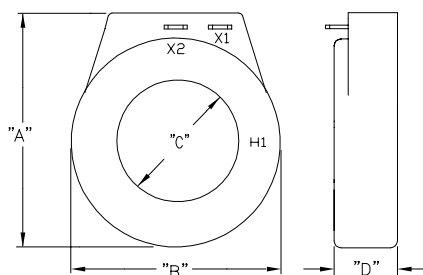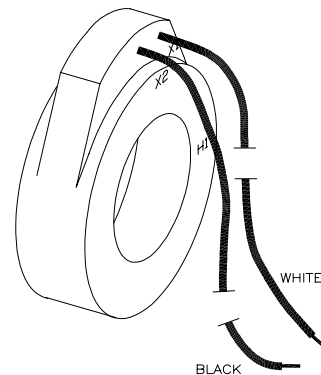


MODEL AF, BF, CF DIMENSIONS

MODEL AF	MODEL BF	MODEL CF
A: 2.88	A: 3.88	A: 5.02
B: 2.47 DIA.	B: 3.43 DIA.	B: 4.50 DIA.
C: 1.05 DIA.	C: 2.06 DIA.	C: 3.00 DIA.
D: 1.05	D: 1.10	D: 1.10

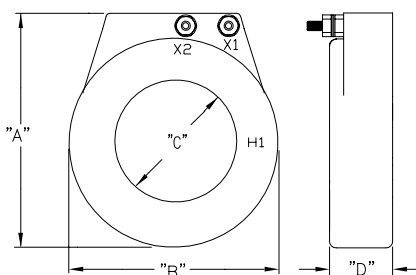

MODEL BT, CT DIMENSIONS

MODEL BT	MODEL CT
A: 3.88	A: 5.02
B: 3.43 DIA.	B: 4.50 DIA.
C: 2.06 DIA.	C: 3.00 DIA.
D: 1.10	D: 1.10

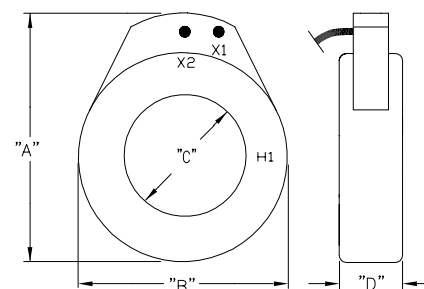

MODEL AL, BL, CL DIMENSIONS

MODEL AL	MODEL BL	MODEL CL
A: 2.74	A: 3.74	A: 4.88
B: 2.47 DIA.	B: 3.43 DIA.	B: 4.50 DIA.
C: 1.05 DIA.	C: 2.06 DIA.	C: 3.00 DIA.
D: 1.05	D: 1.10	D: 1.10

MODEL A

CATALOG NUMBER	CURRENT RATIO	ACCURACY AT 60 Hz	BURDEN VA at 60 Hz
A* – 500	50:5	± 3 %	2.0
A* – 600	60:5	± 2 %	2.0
A* – 750	75:5	± 2 %	2.0
A* – 800	80:5	± 2 %	2.0
A* – 101	100:5	± 1 %	2.0
A* – 121	120:5	± 1 %	2.5
A* – 1250	125:5	± 1 %	2.5
A* – 151	150:5	± 1 %	4.0
A* – 201	200:5	± 1 %	4.0
A* – 251	250:5	± 1 %	6.0
A* – 301	300:5	± 1 %	8.0
A* – 401	400:5	± 1 %	10.0

MODEL B




CATALOG NUMBER	CURRENT RATIO	ACCURACY AT 60 Hz	BURDEN VA at 60 Hz
B* – 500	50:5	± 3 %	0.5
B* – 750	75:5	± 1 %	0.5
B* – 101	100:5	± 1 %	1.0
B* – 151	150:5	± 1 %	2.5
B* – 201	200:5	± 1 %	4.0
B* – 251	250:5	± 1 %	6.0
B* – 301	300:5	± 1 %	7.5
B* – 401	400:5	± 1 %	10.0
B* – 501	500:5	± 1 %	12.5
B* – 601	600:5	± 1 %	15.0
B* – 751	750:5	± 1 %	7.0
B* – 801	800:5	± 1 %	8.0
B* – 102	1000:5	± 1 %	10.0
B* – 122	1200:5	± 1 %	12.5

MODEL C


CATALOG NUMBER	CURRENT RATIO	ACCURACY AT 60 Hz	BURDEN VA at 60 Hz
C* – 201	200:5	± 1 %	5.0
C* – 251	250:5	± 1 %	5.0
C* – 301	300:5	± 1 %	6.0
C* – 401	400:5	± 1 %	10.0
C* – 501	500:5	± 1 %	10.0
C* – 601	600:5	± 1 %	10.0
C* – 751	750:5	± 1 %	10.0
C* – 801	800:5	± 1 %	12.5
C* – 102	1000:5	± 1 %	10.0
C* – 122	1200:5	± 1 %	10.0
C* – 152	1500:5	± 1 %	12.5
C* – 162	1600:5	± 1 %	12.5
C* – 202	2000:5	± 1 %	15.0

* NOTE: Specify "F" for fast-ons, "T" for terminals or "L" for leads.

Models BB & CB

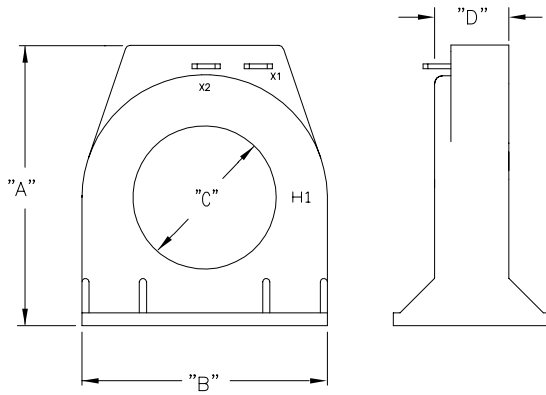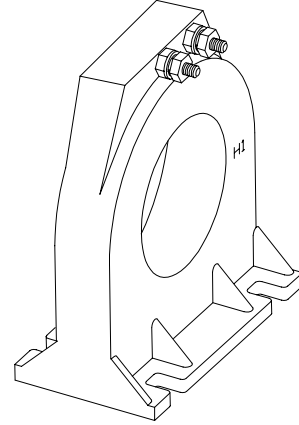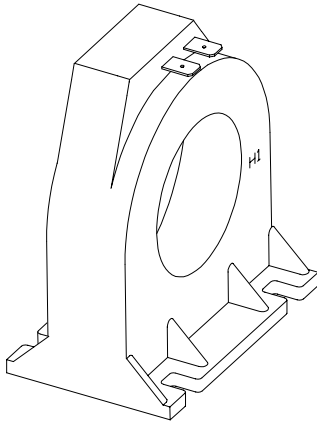

A: 4.00
B: 3.43 DIA.
C: 2.06 DIA.
D: 1.10

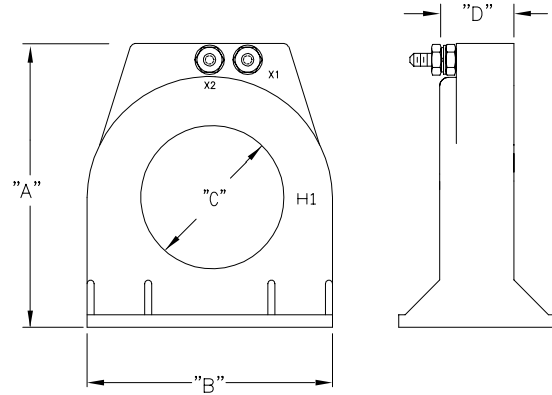

A: 5.15
B: 4.50 DIA.
C: 3.00 DIA.
D: 1.10

MODEL BB

CATALOG NUMBER	CURRENT RATIO	ACCURACY AT 60 Hz	BURDEN VA at 60 Hz
BB* - 500	50:5	$\pm 3\%$	0.5
BB* - 750	75:5	$\pm 1\%$	0.5
BB* - 101	100:5	$\pm 1\%$	1.0
BB* - 151	150:5	$\pm 1\%$	2.5
BB* - 201	200:5	$\pm 1\%$	4.0
BB* - 251	250:5	$\pm 1\%$	6.0
BB* - 301	300:5	$\pm 1\%$	7.5
BB* - 401	400:5	$\pm 1\%$	10.0
BB* - 501	500:5	$\pm 1\%$	12.5
BB* - 601	600:5	$\pm 1\%$	15.0
BB* - 751	750:5	$\pm 1\%$	7.0
BB* - 801	800:5	$\pm 1\%$	8.0
BB* - 102	1000:5	$\pm 1\%$	10.0
BB* - 122	1200:5	$\pm 1\%$	12.5

MODEL CB

CATALOG NUMBER	CURRENT RATIO	ACCURACY AT 60 Hz	BURDEN VA at 60 Hz
CB* - 201	200:5	$\pm 1\%$	5.0
CB* - 251	250:5	$\pm 1\%$	5.0
CB* - 301	300:5	$\pm 1\%$	6.0
CB* - 401	400:5	$\pm 1\%$	10.0
CB* - 501	500:5	$\pm 1\%$	10.0
CB* - 601	600:5	$\pm 1\%$	10.0
CB* - 751	750:5	$\pm 1\%$	10.0
CB* - 801	800:5	$\pm 1\%$	12.5
CB* - 102	1000:5	$\pm 1\%$	10.0
CB* - 122	1200:5	$\pm 1\%$	10.0
CB* - 152	1500:5	$\pm 1\%$	12.5
CB* - 162	1600:5	$\pm 1\%$	12.5
CB* - 202	2000:5	$\pm 1\%$	15.0

* NOTE: Specify "F" for fast-ons or "T" for terminls.