
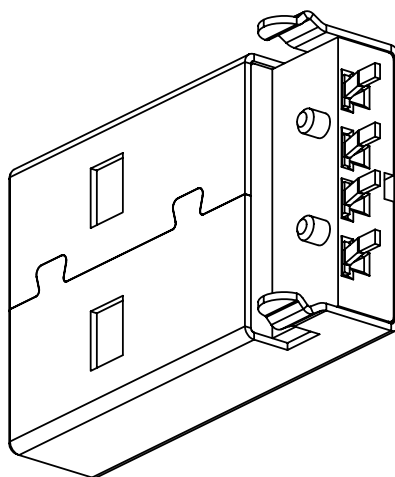

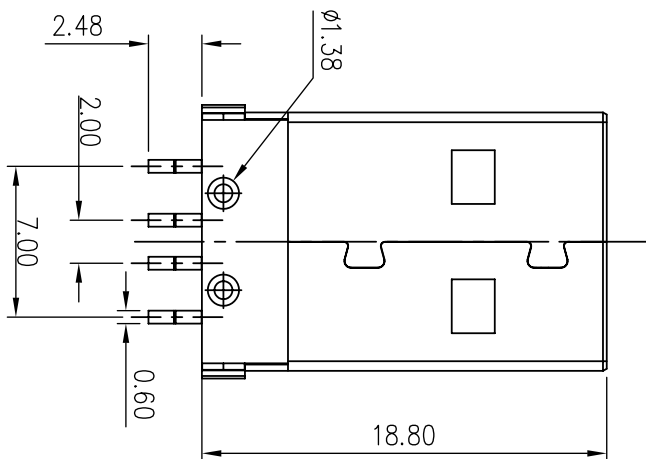


PROD NO  
SEE SHEET 2/2

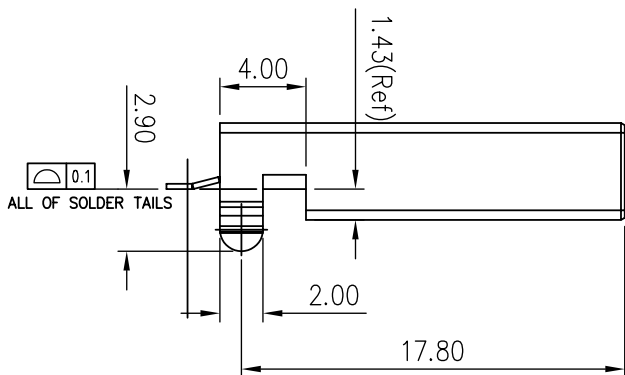

mod'l. code		tolerances unless otherwise specified		CUSTOMER COPY		title		product family		code	
lir	ecn no	dr	date	line	XX ±.30	projection	FCI	USB	code	sheet	1 of 2
A	T03-0392	J.C	9/15/03		.XX ±.20		www.fciconnect.com	USB A TYPE PLUG (SMT)			
B	T03-0478	J.C	10/28/03		.XXX ±.10						
C	T05-0246	W.L	10/31/05	angles	0° ±.3°						
D	T06-0202	A.C.	12/27/06	dr	JASMINE CHANG 8/15/03						
				engr	ALLEN CHANG 8/15/03						
				chr	ROGER LIN 8/15/03						
				oppl	JAMES HSU 8/15/03						
sheet	revision	D	D								
index	sheet	1	2								

ACAD

cage code  
22526

PROD NO.  
SEE NOTES

NOTES:

1.MATERIAL:

SHELL: SPCC

HOUSING: THERMOPLASTIC, GLASS FIBER FILLED.  
UL 94V-0 RATED.

CONTACT: COPPER ALLOY

2.PLATING:

SHELL : N:NICKEL PLATED WITH Cu UNDERPLATE.

CONTACT : UNDERPLATED NICKEL OVER ALL.

MATTE TIN ON SOLDERING AREA,  
SELECTIVE GOLD PLATED ON CONTACT AREA.

3.PRODUCT SPEC NO: GS-12-265.

PACKAGE SPEC NO: GS-14-874.

4.PRODUCT NO. DESCRIPTION

10033425 - N 3 4 X LF

LEAD FREE VERSION

HOUSING COLOR

0: WHITE

1: BLACK

HOUSING MATERIAL

4: LCP OR EQUIVALENT

CONTACT GOLD PLATED

3: 30U


SHELL PLATING

N: NICKEL

5.10033425-N34XL: THE HOUSING WILL WITHSTAND EXPOSURE

TO 260° PEAK TEMPERATURE FOR 10 SECONDS IN A CONVECTION,  
IR OR VAPOR PHASE REFLOW OVEN.

6. THIS PRODUCT (10033425-N34XL) MEETS THE EUROPEAN  
UNION DIRECTIVE AS DESCRIBED IN GS-22-008.

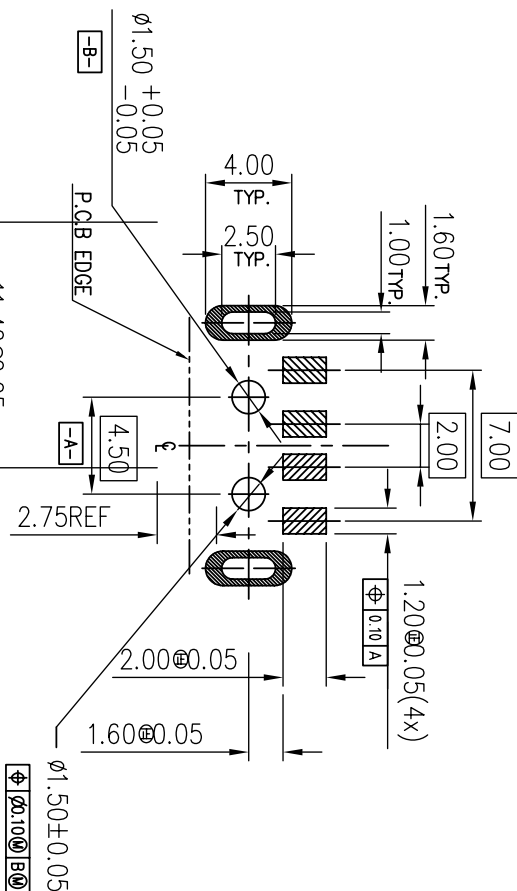

(COMPONENT SIDE) THICKNESS=1.2~1.6mm  
GENERAL TOLERANCE±0.05mm

RECOMMENDED PCB LAYOUT

mod'l. code				tolerances unless otherwise specified		CUSTOMER COPY		title		product family		code	
lfr	ecn no	dr	date	linear	.XX ±.20	projection	MM	size	dwg no	product family	code	sheet	2 of 2
D					.XX ±.20					USB			
					.XX ±.10								
					0° ±.3°								
					dr JASMINE CHANG 8/15/03								
					engr ALLEN CHANG 8/15/03								
					chr ROGER LIN 8/15/03								
					appd JAMES HSU 8/15/03								
sheet	revision												
index	sheet												

ACAD

cage code  
22526