


ALE

Washable



RoHS Compliant



Standard Lever & Rocker Switches

UL

■ Features

1. High reliability

The twin-contact clip mechanism is employed for the contact section to ensure high reliability.

2. Process sealed structure

All types of the switch feature the completely sealed structure.

3. Designed for dry circuit applications

Since the contacts are gold-plated, the switches are best suited for use in the dry circuit areas.

4. Designed for PC board applications

The terminal pitches are all in inch size (2.54 mm).

5. Improved operability

The independent detent structure provides a light operating touch.


6. All models are of UL-approved type.

(File No. E42375)

■ Specifications

Rating	Max : 50mA 60VAC/DC Min : 1μA 20mVAC/DC
Initial contact resistance	50mΩ max. (1.5mA 200μVAC)
Dielectric strength	250VAC 1 minute
Insulation resistance	500MΩ min. (500VDC)
Electrical life	10,000 cycles at maximum rating 50,000 cycles at 0.4VA min. (D,E type) 30,000 cycles at 0.4VA min. (F,G,H type)
Operating temperature range	-20~+85°C
Storage temperature range	-40~+85°C

■ Part Numbering

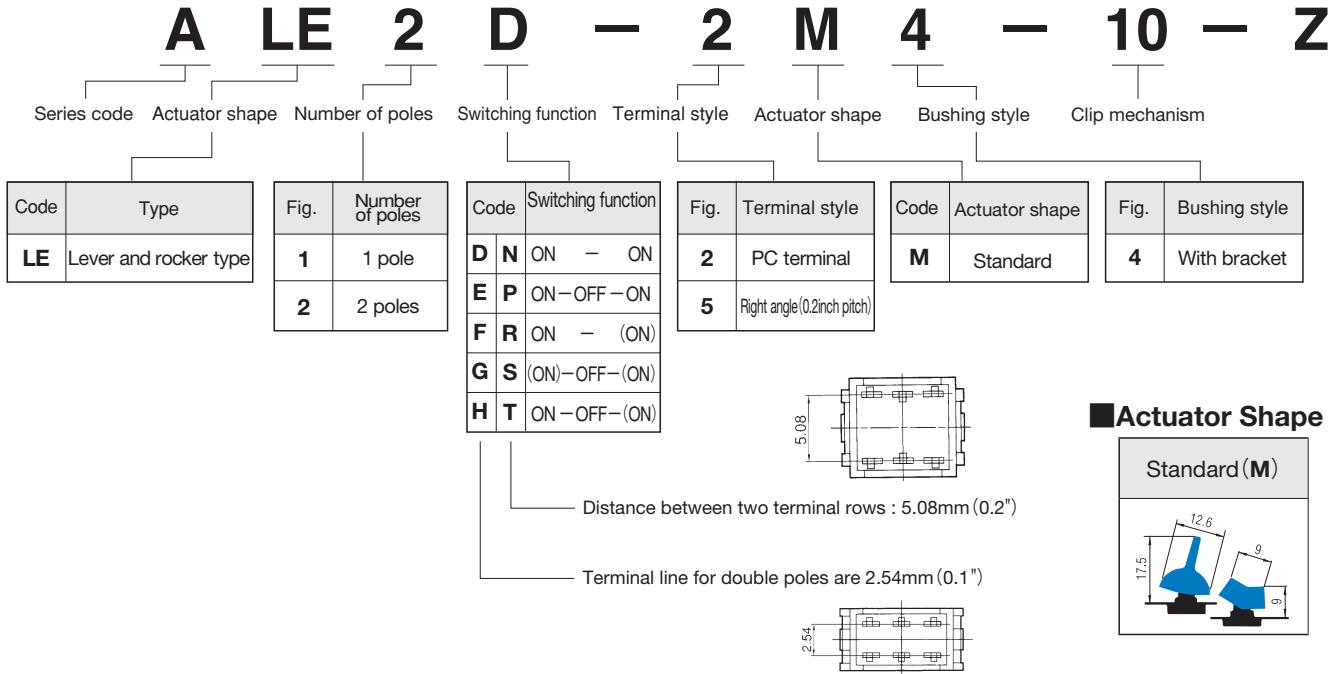



APE (Standard Lever & Rocker Switches)

SPDT

PC



(Mount with Rocker)



Switching function		Viewed from part No. and rating marking side	
Part No.	Switching function	ON	OFF
■ ALE1D-2M4-10-Z	ON	—	ON
■ ALE1E-2M4-10-Z	ON	OFF	ON
■ ALE1F-2M4-10-Z	ON	—	(ON)
■ ALE1G-2M4-10-Z	(ON)	OFF	(ON)
■ ALE1H-2M4-10-Z	ON	OFF	(ON)
Connecting terminals	2-3	—	2-1



Terminal numbers are not shown on the bottom of the switch.

DPDT

PC



(Mount with Lever)



Switching function		Viewed from part No. marking side	
Part No.	Switching function	ON	OFF
■ ALE2D-2M4-10-Z	ON	—	ON
■ ALE2E-2M4-10-Z	ON	OFF	ON
■ ALE2F-2M4-10-Z	ON	—	(ON)
■ ALE2G-2M4-10-Z	(ON)	OFF	(ON)
■ ALE2H-2M4-10-Z	ON	OFF	(ON)
Connecting terminals	2-3 5-6	—	2-1 5-4



Terminal numbers are not shown on the bottom of the switch.

DPDT

PC



(Mount with Rocker)



Switching function		Viewed from part No. marking side	
Part No.	Switching function	ON	OFF
■ ALE2N-2M4-10-Z	ON	—	ON
■ ALE2P-2M4-10-Z	ON	OFF	ON
■ ALE2R-2M4-10-Z	ON	—	(ON)
■ ALE2S-2M4-10-Z	(ON)	OFF	(ON)
■ ALE2T-2M4-10-Z	ON	OFF	(ON)
Connecting terminals	2-3 5-6	—	2-1 5-4



Terminal numbers are not shown on the bottom of the switch.

SPDT

0.2R/A



(Mount with Lever)



Switching function		Viewed from part No. marking side	
Part No.	Switching function	ON	OFF
■ ALE1D-5M4-10-Z	ON	—	ON
■ ALE1E-5M4-10-Z	ON	OFF	ON
■ ALE1F-5M4-10-Z	ON	—	(ON)
■ ALE1G-5M4-10-Z	(ON)	OFF	(ON)
■ ALE1H-5M4-10-Z	ON	OFF	(ON)
Connecting terminals	2-3	—	2-1



Terminal numbers are not shown on the bottom of the switch.

DPDT

0.2R/A



(Mount with Rocker)



Switching function		Viewed from part No. marking side	
Part No.	Switching function	ON	OFF
■ ALE2D-5M4-10-Z	ON	—	ON
■ ALE2E-5M4-10-Z	ON	OFF	ON
■ ALE2F-5M4-10-Z	ON	—	(ON)
■ ALE2G-5M4-10-Z	(ON)	OFF	(ON)
■ ALE2H-5M4-10-Z	ON	OFF	(ON)
Connecting terminals	2-3 5-6	—	2-1 5-4

Terminal numbers are not shown on the bottom of the switch.

(ON) : Momentary



▲ : Inquiry products.

☆ : Semi-standard products.

★ : Made to order products.

■ Standard Accessories

《Supplied separately》

Lever			Rocker		
Dimension	Color	Part No.	Dimensions	Color	Part No.
 Gloss finish ABS resin	White	140000050624	 Gloss finish ABS resin	White	140000480673
	Red	140000050626		Red	140000480675
	Black	140000050625		Black	140000480674
	Gray	140000050630		Gray	140000480679
	Green	140000050628		Green	140000480677
	Blue	140000050629		Blue	140000480678
	Orange	140000050632		Orange	140000480680
	Yellow	140000050627		Yellow	140000480676
	Brown	140000050647		Brown	140000480693

The lever and the rocker are standard accessories. Specify either of the lever or the rocker in part number.

■ Lever•rocker Installation procedure

■ PC Hole Layouts

(Top view)



Mount the lever or the rocker after cleaning.

■ Soldering Specifications

(1) Manual Soldering


Device : Soldering iron

380°C, Max.; 3 seconds, Max.

(2) Auto Soldering






Device : Jet wave type or dip type

275°C, Max.; 6 seconds, Max.



● Pre-heating should be done at temperatures ranging from 80°C to 120°C and within 120 seconds.

Note: Mount the accessories of knob and lever after the soldering.

PC terminal	1-pole (Compact type)	
	2-pole (Compact type)	
	2-pole (Two terminal rows)	
Right angle terminal	1-pole (Compact type)	
	2-pole (Compact type)	

■ Flux Cleaning

(1) For the solvent, use the fluorine- or alcohol-based solvent.

Solvent: Fluorine or Alcohol type

(2) Cleaning after soldering should be done after the terminal temperature falls to 90°C or below, or after leaving the switch for five minutes or longer at room temperature.

■ Packaging Specification

Plastic Pack

