

RF Chokes

Series/Type: B78108T, B78148T

The following products presented in this data sheet are being withdrawn.

Ordering Code	Substitute Product	Date of Withdrawal	Deadline Last Orders	Last Shipments
B78148T3821K009		2012-10-19	2013-01-31	2013-04-30
B78148T3821K000		2012-10-19	2013-01-31	2013-04-30
B78148T3681K009		2012-10-19	2013-01-31	2013-04-30



Ordering Code	Substitute Product	Date of Withdrawal	Deadline Last Orders	Last Shipments	
78148T3681K000		2012-10-19	2013-01-31	2013-04-30	
B78148T3561K009		2012-10-19	2013-01-31	2013-04-30	
B78148T3561K000		2012-10-19	2013-01-31	2013-04-30	
B78148T3471K009		2012-10-19	2013-01-31	2013-04-30	
B78148T3471K000		2012-10-19	2013-01-31	2013-04-30	
B78148T3391K009		2012-10-19	2013-01-31	2013-04-30	
B78148T3391K000		2012-10-19	2013-01-31	2013-04-30	
B78148T3331K009		2012-10-19	2013-01-31	2013-04-30	
B78148T3331K000		2012-10-19	2013-01-31	2013-04-30	
B78148T3271K009		2012-10-19	2013-01-31	2013-04-30	
B78148T3271K000		2012-10-19	2013-01-31	2013-04-30	
B78148T3221K009		2012-10-19	2013-01-31	2013-04-30	
B78148T3221K000		2012-10-19	2013-01-31	2013-04-30	
B78148T3181K009		2012-10-19	2013-01-31	2013-04-30	
B78148T3181K000		2012-10-19	2013-01-31	2013-04-30	
B78148T3151K009		2012-10-19	2013-01-31	2013-04-30	
B78148T3151K000		2012-10-19	2013-01-31	2013-04-30	
B78148T3121K009		2012-10-19	2013-01-31	2013-04-30	
B78148T3121K000		2012-10-19	2013-01-31	2013-04-30	
B78148T3101K009		2012-10-19	2013-01-31	2013-04-30	
B78148T3101K000		2012-10-19	2013-01-31	2013-04-30	
B78108T3821K009		2012-10-19	2013-01-31	2013-04-30	
B78108T3821K000		2012-10-19	2013-01-31	2013-04-30	
B78108T3681K009		2012-10-19	2013-01-31	2013-04-30	
B78108T3681K000		2012-10-19	2013-01-31	2013-04-30	
B78108T3561K009		2012-10-19	2013-01-31	2013-04-30	
B78108T3561K000		2012-10-19	2013-01-31	2013-04-30	
B78108T3471K009		2012-10-19	2013-01-31	2013-04-30	
B78108T3471K000		2012-10-19	2013-01-31	2013-04-30	
B78108T3391K009		2012-10-19	2013-01-31	2013-04-30	
B78108T3391K000		2012-10-19	2013-01-31	2013-04-30	
B78108T3331K009		2012-10-19	2013-01-31	2013-04-30	
B78108T3331K000		2012-10-19	2013-01-31	2013-04-30	
B78108T3271K009		2012-10-19	2013-01-31	2013-04-30	
B78108T3271K000		2012-10-19	2013-01-31	2013-04-30	
B78108T3221K009		2012-10-19	2013-01-31	2013-04-30	
B78108T3221K000		2012-10-19	2013-01-31	2013-04-30	
B78108T3181K009		2012-10-19	2013-01-31	2013-04-30	



Ordering Code	Substitute Product	Date of Withdrawal	Deadline Last Orders	Last Shipments
B78108T3181K000		2012-10-19	2013-01-31	2013-04-30
B78108T3151K009		2012-10-19	2013-01-31	2013-04-30
B78108T3151K000		2012-10-19	2013-01-31	2013-04-30
B78108T3121K009		2012-10-19	2013-01-31	2013-04-30
B78108T3121K000		2012-10-19	2013-01-31	2013-04-30
B78108T3101K009		2012-10-19	2013-01-31	2013-04-30
B78108T3101K000		2012-10-19	2013-01-31	2013-04-30

For further information please contact your nearest EPCOS sales office, which will also support you in selecting a suitable substitute. The addresses of our worldwide sales network are presented at www.epcos.com/sales.



MCC series, 3.3 x 7 (mm)

MCC choke (Mini Cylinder Core) Rated inductance 0.1 ... 100 μH Rated current 85 ... 1120 mA

Construction

- Ceramic or ferrite cylinder core
- Winding: enamel copper wire
- Flame-retardant lacquer coating

Features

- Low total height
- Low inductance
- High resonance frequency
- Suitable for wave soldering
- RoHS-compatible

Applications

- RF blocking
- Decoupling and interference suppression
- For antenna systems, automotive electronics, telecommunications, entertainment electronics

Terminals

- Central axial leads (B78108T)
- Radially bent to 5 mm lead spacing (B78148T)
- B781*T3:
 - Base material Staku 30/copper-clad steel 30
 - Hot-dipped and electro-plated with pure tin
- B781*T1:
 - Base material CuAg0.1
 - Electroplated with nickel and pure tin

Marking

Inductance indicated by color bands to IEC 60062


Delivery mode and packing units

- Taped, Ammo and reel packing
- Packing units:

	Ammo (pcs./pack.)	Reel (pcs./reel)	
Axial	5000	5000	
Radial	2500	2000	



B78108T



B78148T




MCC series, 3.3 x 7 (mm)

Dimensional drawings


B78108T (axial leads, taped)

Dimensions in mm

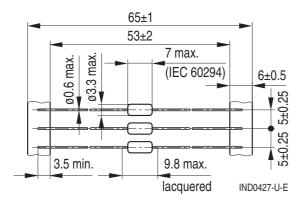


Minimum lead spacing 10 mm


B78148T (central radial leads, taped)

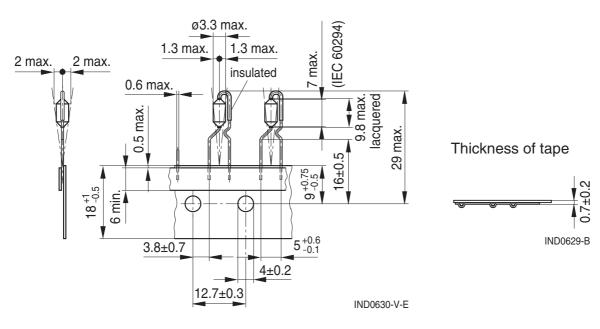

Packing

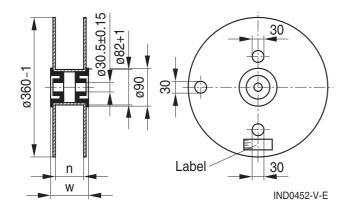

n (mm): Axial 72 +1, radial 42 +1 w (mm): Axial 84 max., radial 54 max.



 $L \times W \times H$ (max. mm):

Axial: $310 \times 75 \times 120$, radial: $340 \times 50 \times 210$



MCC series, 3.3 x 7 (mm)

Technical data and measuring conditions

Rated inductance L _R	Measured with LCR meter Agilent 4284A or impedance analyzer Agilent 4294A					
	Measuring frequency: $L_R \le 10 \ \mu H$ = 1 MHz $10 \ \mu H < L_R \le 4700 \ \mu H = 100 \ kHz$					
	Measuring current: ≤ 1 mA Measuring temperature: +20 °C					
Q factor Q _{min}	Measured with precision impedance analyzer Agilent 4294A, +20 °C					
Rated temperature T _R	+40 °C					
Rated current I _R	Maximum permissible DC current at rated temperature					
Inductance decrease ΔL/L ₀	≤ 10% (referred to initial value) at I _R , +20 °C					
DC resistance R _{max}	Measured at +20 °C					
Resonance frequency f _{res,min}	Measured with Agilent 4294A or 8753ES, +20 °C					
Solderability (lead-free)	Sn95.5Ag3.8Cu0.7: $+(245 \pm 5)$ °C, (3 ± 0.3) s Wetting of soldering area $\geq 90\%$ (to IEC 60068-2-20, test Ta)					
Resistance to soldering heat	+(260 ±5) °C, 10 s (to IEC 60068-2-20, test Tb)					
Tensile strength of leads	≥ 20 N (to IEC 60068-2-21, test Ua)					
Climatic category	55/125/56 (to IEC 60068-1)					
Storage conditions	Mounted: -55 °C +125 °C Packaged: -25 °C +40 °C, ≤ 75% RH					
Weight	Approx. 0.25 g					

Mounting information

When bending the leads, take care that the start-of-winding areas at the face ends (protected by glue and lacquer) are not subjected to any mechanical stress.



MCC series, 3.3 x 7 (mm)

Characteristics and ordering codes

L _R	Tolerance ¹⁾	Q _{min}	f_Q	I _R	R _{max}	f _{res,min}	Ordering code ²⁾	
μΗ			MHz	mA	Ω	MHz	(reel packing) ³⁾	
Ceramic	Ceramic cylinder core							
0.10	±10% ≙ K	40	25.2	1120	0.13	600	B781*8T3101K000	
0.12		40	25.2	1080	0.145	570	B781*8T3121K000	
0.15		38	25.2	1020	0.155	500	B781*8T3151K000	
0.18		35	25.2	1000	0.17	460	B781*8T3181K000	
0.22		35	25.2	990	0.195	420	B781*8T3221K000	
0.27		35	25.2	910	0.215	380	B781*8T3271K000	
0.33		35	25.2	830	0.24	330	B781*8T3331K000	
0.39		35	25.2	790	0.27	300	B781*8T3391K000	
0.47		35	25.2	750	0.315	280	B781*8T3471K000	
0.56		35	25.2	700	0.34	260	B781*8T3561K000	
0.68		35	25.2	530	0.48	240	B781*8T3681K000	
0.82		35	25.2	500	0.55	230	B781*8T3821K000	

¹⁾ Closer tolerances on request.

²⁾ Replace the * by code number »0« for axial taping or by »4« for radial taping.
3) For Ammo pack the last digit has to be a »9«. Example: B78108T3101K009



MCC series, 3.3 x 7 (mm)

Characteristics and ordering codes

L _R	Tolerance ¹⁾	Q _{min}	f _Q	I _R	R _{max}	f _{res,min}	Ordering code ²⁾
μΗ			MHz	mA	Ω	MHz	(reel packing)3)
Ferrite cylinder core							
1.0	±10% ≙ K	35	25.2	630	0.25	180	B781*8T1102K000
1.2		40	7.96	610	0.25	170	B781*8T1122K000
1.5		40	7.96	570	0.30	150	B781*8T1152K000
1.8		40	7.96	540	0.30	130	B781*8T1182K000
2.2		40	7.96	520	0.35	120	B781*8T1222K000
2.7		40	7.96	480	0.40	110	B781*8T1272K000
3.3		40	7.96	420	0.50	110	B781*8T1332K000
3.9		40	7.96	400	0.55	100	B781*8T1392K000
4.7		40	7.96	380	0.65	90	B781*8T1472K000
5.6		45	7.96	260	1.30	75	B781*8T1562K000
6.8		45	7.96	250	1.45	70	B781*8T1682K000
8.2		50	7.96	240	1.60	65	B781*8T1822K000
10		50	7.96	230	1.70	60	B781*8T1103K000
12		55	2.52	190	2.40	50	B781*8T1123K000
15		55	2.52	185	2.70	45	B781*8T1153K000
18		55	2.52	175	2.90	40	B781*8T1183K000
22		60	2.52	170	3.20	30	B781*8T1223K000
27		60	2.52	160	3.60	27	B781*8T1273K000
33		60	2.52	150	4.10	24	B781*8T1333K000
39		60	2.52	140	4.50	22	B781*8T1393K000
47		60	2.52	100	8.50	20	B781*8T1473K000
56		60	2.52	100	8.80	18	B781*8T1563K000
68		60	2.52	95	10.0	15	B781*8T1683K000
82		60	2.52	90	11.5	14	B781*8T1823K000
100		60	2.52	85	12.5	11	B781*8T1104K000

¹⁾ Closer tolerances on request.


²⁾ Replace the * by code number »0« for axial taping or by »4« for radial taping.
3) For Ammo pack the last digit has to be a »9«. Example: B78108T3101K009




MCC series, 3.3 x 7 (mm)

Impedance |Z| versus frequency f


measured with impedance analyzer Agilent 4294A or S-parameter network analyzer Agilent 8753ES, typical values at +20 °C

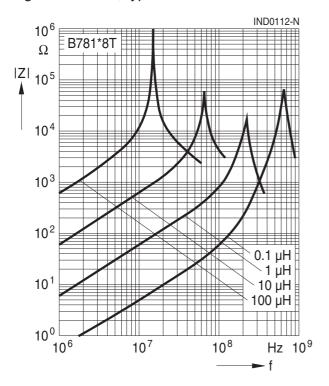


Q factor versus frequency f measured with impedance analyzer Agilent 4294A, typical values at +20 °C

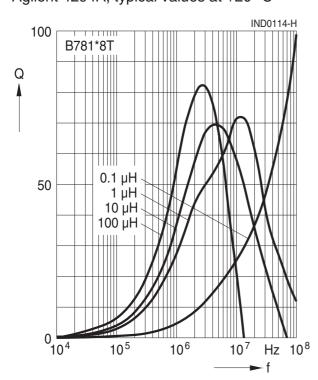

Inductance L versus DC load current I_{DC} measured with LCR meter Agilent 4284A, typical values at +20 °C

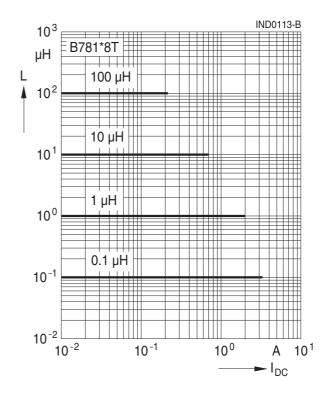

Current derating I_{op}/I_R versus ambient temperature TA (rated temperature $T_B = +40$ °C)

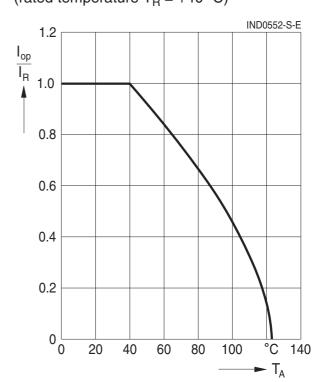



Cautions and warnings

- Please note the recommendations in our Inductors data book (latest edition) and in the data sheets.
 - Particular attention should be paid to the derating curves given there.
 - The soldering conditions should also be observed. Temperatures quoted in relation to wave soldering refer to the pin, not the housing.
- If the components are to be washed varnished it is necessary to check whether the washing varnish agent that is used has a negative effect on the wire insulation, any plastics that are used, or on glued joints. In particular, it is possible for washing varnish agent residues to have a negative effect in the long-term on wire insulation.
 Washing processes may damage the product due to the possible static or cyclic mechanical loads (e.g. ultrasonic cleaning). They may cause cracks to develop on the product and its parts, which might lead to reduced reliability or lifetime.
- The following points must be observed if the components are potted in customer applications:
 - Many potting materials shrink as they harden. They therefore exert a pressure on the plastic housing or core. This pressure can have a deleterious effect on electrical properties, and in extreme cases can damage the core or plastic housing mechanically.
 - It is necessary to check whether the potting material used attacks or destroys the wire insulation, plastics or glue.
 - The effect of the potting material can change the high-frequency behaviour of the components.
- Ferrites are sensitive to direct impact. This can cause the core material to flake, or lead to breakage of the core.
- Even for customer-specific products, conclusive validation of the component in the circuit can only be carried out by the customer.



Important notes

The following applies to all products named in this publication:

- 1. Some parts of this publication contain statements about the suitability of our products for certain areas of application. These statements are based on our knowledge of typical requirements that are often placed on our products in the areas of application concerned. We nevertheless expressly point out that such statements cannot be regarded as binding statements about the suitability of our products for a particular customer application. As a rule, EPCOS is either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always ultimately incumbent on the customer to check and decide whether an EPCOS product with the properties described in the product specification is suitable for use in a particular customer application.
- 2. We also point out that in individual cases, a malfunction of electronic components or failure before the end of their usual service life cannot be completely ruled out in the current state of the art, even if they are operated as specified. In customer applications requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health (e.g. in accident prevention or life-saving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of an electronic component.
- 3. The warnings, cautions and product-specific notes must be observed.
- 4. In order to satisfy certain technical requirements, some of the products described in this publication may contain substances subject to restrictions in certain jurisdictions (e.g. because they are classed as hazardous). Useful information on this will be found in our Material Data Sheets on the Internet (www.epcos.com/material). Should you have any more detailed questions, please contact our sales offices.
- 5. We constantly strive to improve our products. Consequently, the products described in this publication may change from time to time. The same is true of the corresponding product specifications. Please check therefore to what extent product descriptions and specifications contained in this publication are still applicable before or when you place an order.
 - We also **reserve the right to discontinue production and delivery of products**. Consequently, we cannot guarantee that all products named in this publication will always be available. The aforementioned does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.
- 6. Unless otherwise agreed in individual contracts, all orders are subject to the current version of the "General Terms of Delivery for Products and Services in the Electrical Industry" published by the German Electrical and Electronics Industry Association (ZVEI).
- 7. The trade names EPCOS, BAOKE, Alu-X, CeraDiode, CeraLink, CSMP, CSSP, CTVS, DeltaCap, DigiSiMic, DSSP, FilterCap, FormFit, MiniBlue, MiniCell, MKD, MKK, MLSC, MotorCap, PCC, PhaseCap, PhaseCube, PhaseMod, PhiCap, SIFERRIT, SIFI, SIKOREL, SilverCap, SIMDAD, SiMic, SIMID, SineFormer, SIOV, SIP5D, SIP5K, ThermoFuse, WindCap are trademarks registered or pending in Europe and in other countries. Further information will be found on the Internet at www.epcos.com/trademarks.