

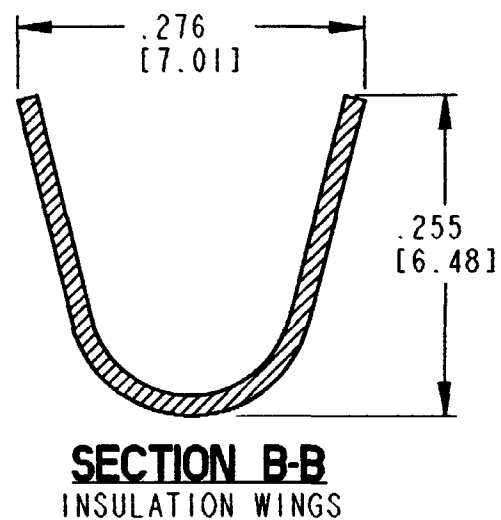
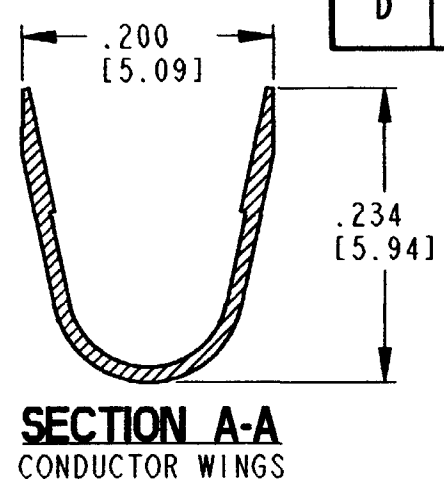


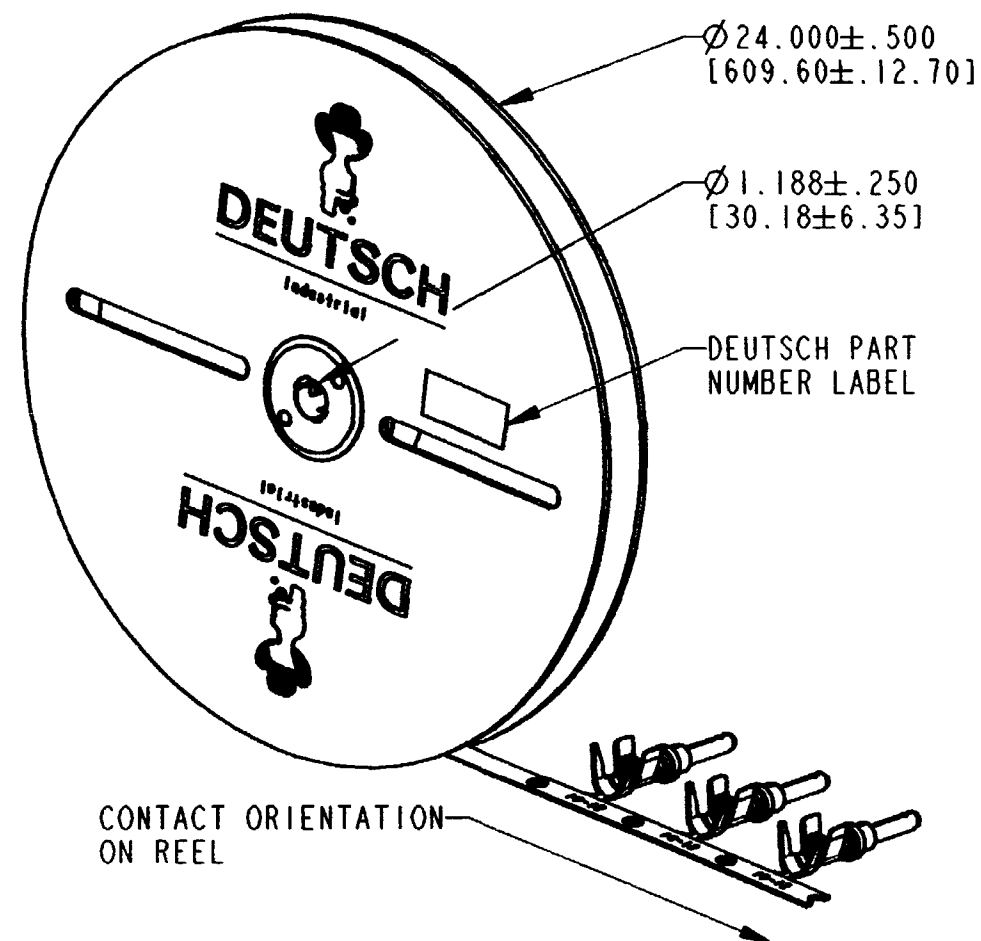

REV D		1060-12-02**		REVISIONS			
		SYM	DESCRIPTION	DATE	APPROVED		
		A	REVISED PER E.O. PI7489	11-2-01	R.D.R.		
		B	REVISED PER E.O. PI7675	3-15-02	R.D.R.		
		C	REVISED PER E.O. PI8856	3-15-05	R.D.R.		
		D	REVISED PER E.O. PI9555	7-11-07	RDR		

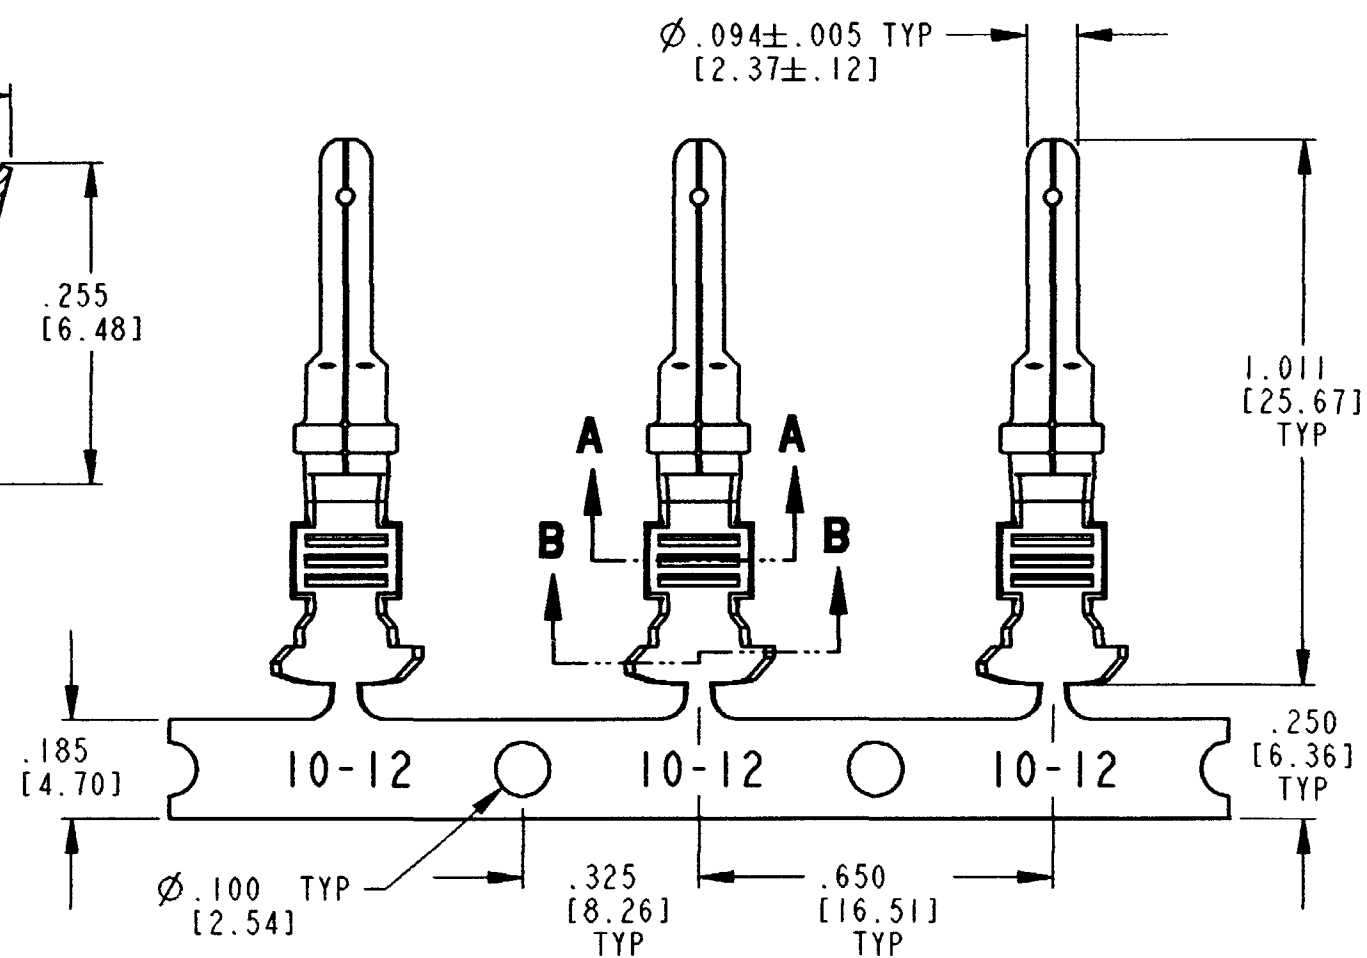

7. CONTACT MATERIAL CONTAINS 98% COPPER MINIMUM.
6. WHEN ** = 22 PLATING IS NICKEL.
** = 44 PLATING IS GOLD.
5. SEE 0425-015-0000 FOR CONTACT PERFORMANCE AND WIRE APPLICATION CHARACTERISTICS.
4. THIS CONTACT MAY BE CRIMPED WITH DCT12-02-01 AUTOMATIC DIE OR DTT-12-01 HAND TOOL. SEE DRAWING 0425-041-0000 FOR APPLICABLE WIRE SIZE, INSULATION DIAMETER RANGE, AND CRIMPING INFORMATION.
3. ONE REEL CONTAINS APPROXIMATELY 2000 CONTACTS.
2. DIMENSION TOLERANCE: $\pm .025$ [.64].
1. DIMENSIONS ARE IN INCHES [mm].

NOTES: UNLESS OTHERWISE SPECIFIED

SIGNATURE & DATE	
DR	D. MEYER 03/08/01
CHK	B. B. 7/11/07
PE	D. Meyer 7/10/07
APPD	R. R. 7-11-07
SCALE	NONE
WT	

STAMPED CONTACT
PIN
SIZE 12

ENVELOPE

EP	EP101	MATL. CODE
The Deutsch Company DEUTSCH I.P.D. 3850 INDUSTRIAL AVE. HEMET, CALIF. 92545		
B	1060-12-02**	
DWG SIZE	CODE 11139	SHEET 1 OF 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1060-12-0222](#) [1060-12-0222 \(Cut Strip\)](#) [1060-12-0222 \(Mouser Reel\)](#) [1060-12-0222 \(Loose Piece\)](#)