


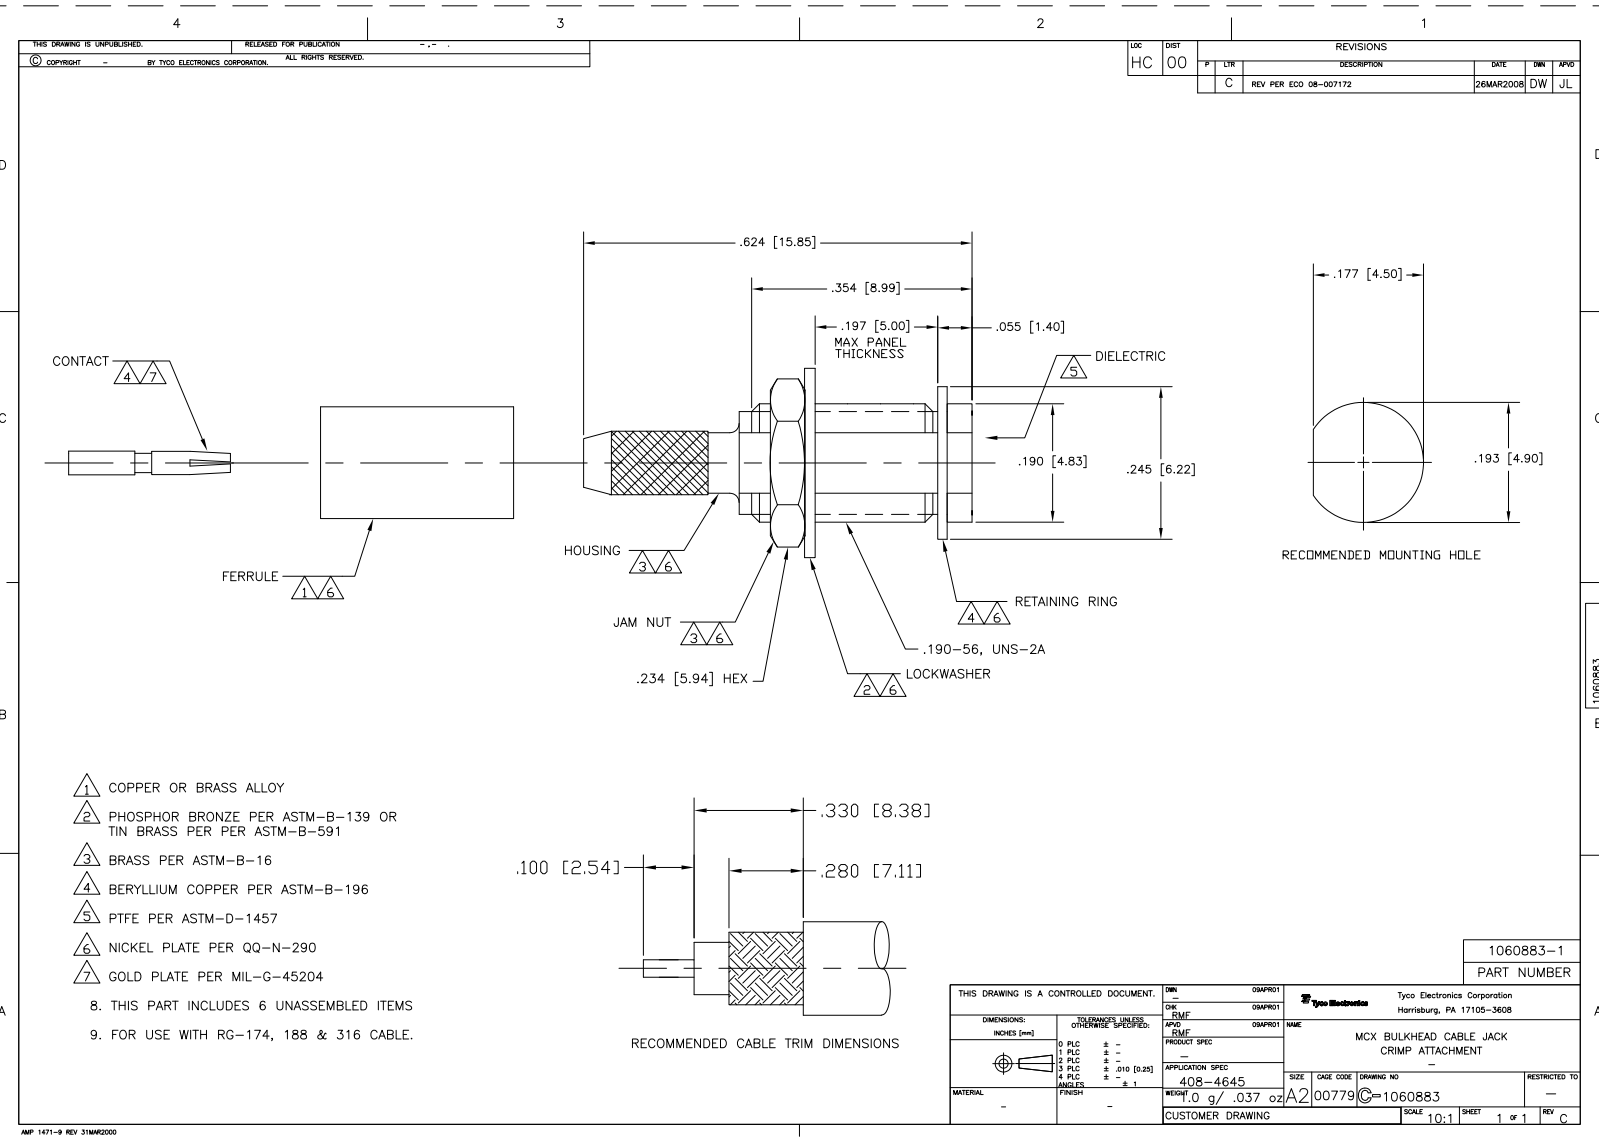

THIS DRAWING IS UNPUBLISHED.		RELEASED FOR PUBLICATION			
© COPYRIGHT		BY TYCO ELECTRONICS CORPORATION.		ALL RIGHTS RESERVED.	

LOC	HC	DIST	00	REVISIONS	
P	LTR	DESCRIPTION		DATE	DW
C		REV PER ECO 08-007172		26MAR2008	JL

Technical drawing of a cable jack assembly. The main view shows a side profile with dimensions: .624 [15.85] (total length), .354 [8.99] (housing length), .197 [5.00] (MAX PANEL THICKNESS), .055 [1.40] (dielectric thickness), .190 [4.83] (retaining ring thickness), .245 [6.22] (lockwasher thickness), and .177 [4.50] (recommended mounting hole diameter). Callouts include: CONTACT, FERRULE, HOUSING, JAM NUT, .234 [5.94] HEX, LOCKWASHER, RETAINING RING, and DIELECTRIC. A detail view shows the recommended mounting hole with dimensions .193 [4.90] and .177 [4.50].

1 COPPER OR BRASS ALLOY

2 PHOSPHOR BRONZE PER ASTM-B-139 OR TIN BRASS PER PER ASTM-B-591

3 BRASS PER ASTM-B-16

4 BERYLLIUM COPPER PER ASTM-B-196

5 PTFE PER ASTM-D-1457

6 NICKEL PLATE PER QQ-N-290

7 GOLD PLATE PER MIL-G-45204

8. THIS PART INCLUDES 6 UNASSEMBLED ITEMS

9. FOR USE WITH RG-174, 188 & 316 CABLE.

1060883-1

PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	INCHES (mm)	TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PL	± .005	± .005
1 PL	± .005	± .005
2 PL	± .005	± .005
3 PL	± .005	± .005
4 PL	± .005	± .005
5 PL	± .005	± .005
6 PL	± .005	± .005

MATERIAL: - FINISH: -

DWG NO.	000001	OK	RMF	DATE	08/08/08
PRODUCT SPEC	408-4645	APPLICATION SPEC	408-4645	REVISION	0 g/ .037 oz A2
CUSTOMER DRAWING	1060883	SCALE	10:1	SHEET	1 of 1

TYCO ELECTRONICS Tyco Electronics Corporation Harrisburg, PA 17105-3608

MCX BULKHEAD CABLE JACK CRIMP ATTACHMENT

RESTRICTED TO