

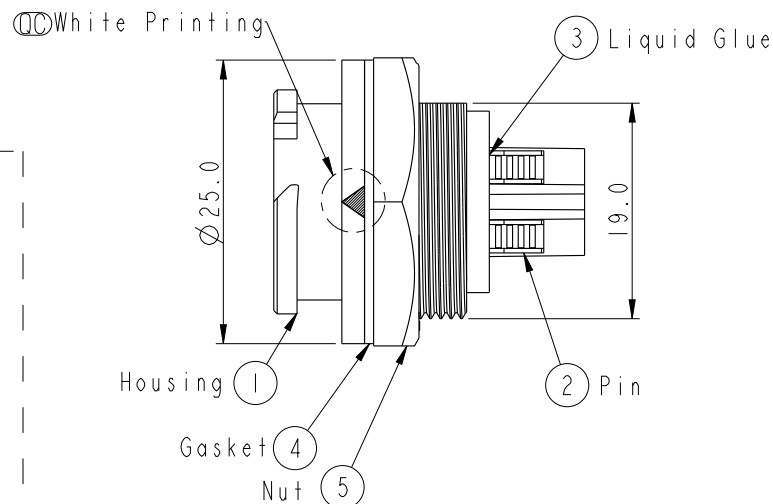
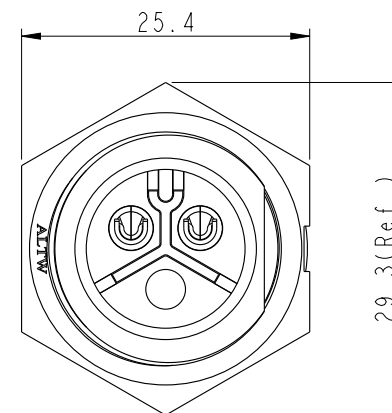
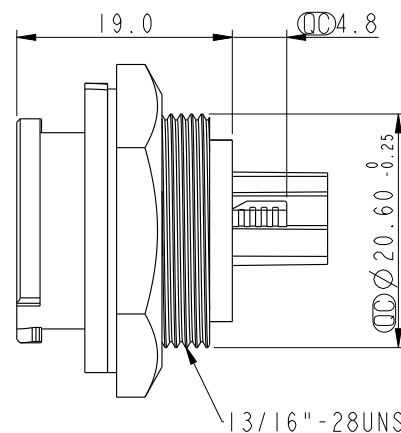




REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial Release	2016-06-08	Tom_Gu	Change Rev.01 To Rev.A



- Note:
- * Ø Important Dimension To Check.
 - * Waterproof Rate: IP68(1M/24Hours)
 - * Working Voltage Rating: AC 300V
 - * Working Current: 20A
 - * Housing: Nylon+GF, Black
 - * Pin: Copper Alloy, Gold Plated
 - * Nut: Nylon+GF, Black
 - * Gasket: Silicone , Gray
 - * Panel Thickness Max: 4.2mm



Pin Assignments
Front View



Recommenderd Panel Cut-Out

UNIT : mm		 	TITLE X-Lok C Size Receptacle Rear 2Pin 20A M Conn. F Pin			Amphenol LTW 安費諾亮泰企業股份有限公司		ITEM NO CC-02RMFS-QC800P		DRAWN BY Tom_Gu		DATE 2016-06-08		
TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1°		SCALE 3:2						SIZE A4		SHEET 1 OF 1		DWG NO CC-02RMFS-QC800P		CHECKED BY Spring_Liu
			REV. A		WC-REV. A.1		QC: Inspection item		CUSTOMER ALTW		APPROVED BY Kevin_Hu		DATE 2016-06-08	

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.