

Distributed by:



[www.Jameco.com](http://www.Jameco.com) ♦ 1-800-831-4242

The content and copyrights of the attached  
material are the property of its owner.


## Plastic-coated Types (7P 10p Types)

Type No.	Out-line	Applied Voltage at 25°C (Vdc)	Allowable Power Dissipation at 25°C (mW)	Ambient Temperature Ta (°C)	Cell Resistance A			C	Response Time at 10 lx 0	
					10 lx (at 2856K)		0 lx B		Rise Time Type (ms)	Decay Time Typ. (ms)
					Min. (KΩ)	Max. (KΩ)	Min. (MΩ)		Typ.	Typ.
7001	/	200	150	-30~+75	3.6	14.4	0.3	0.6	50	20


7001	/	200	150	-30~+75	3.6	14.4	0.3	0.6	50	20
7002	/	200	150	-30~+75	4	20	0.5	0.65	55	20
7003	/	200	150	-30~+75	8	24	0.5	0.7	55	20
7004	/	200	150	-30~+75	15	60	0.5	0.7	60	25

7001	/	200	150	-30~+75	3.6	14.4	0.3	0.6	50	20
5001	/	350	400	-30~+75	8	16	0.3	0.6	55	25
5002	/	350	400	-30~+75	12	30	0.5	0.75	55	25
5003	/	350	400	-30~+75	12	58	1	0.75	55	25

## Cell resistance vs. illuminance

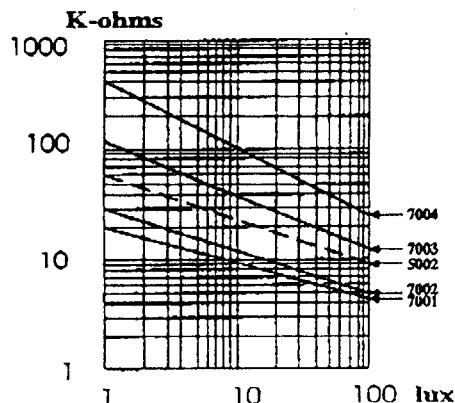

## Cell resistance vs. temperature

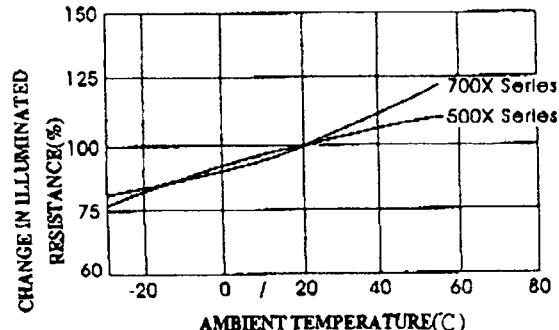

A. Measured with the light source of a tungsten lamp operated at a color temperature of 2856K.

B. Measured 10 seconds after removal of incident illuminance of 10 lux.

C. Gamma characteristic between 10 lux and 100 lux and given by

$$\frac{\log(R_{100}) - \log(R_{10})}{\log(E_{100}) - \log(E_{10})}$$

Where R100, R10: cell resistances at 100 lux and 10 lux respectively  
E100, E10: illuminances of 100 lux and 10 lux respectively

D. The rise time is the time required for the cell conductance to rise to 63% of the saturated level. The decay time is the time required for the cell conductance to decay from the saturated level to 37%.

E. All characteristics are measured with the light history conditions: the Cds cell is exposed to light (100 to 500 lux) for one to two hours.

## Out-line Dimension.

