

CFB200

S E R I E S

100-200 WATT FULL BRICK DC-DC CONVERTERS



Features

- 100-200W Isolated Output
- Full Brick Package
- Regulated Outputs
- Efficiency to 90%
- 300KHz Switching Frequency
- Continuous Short Circuit Protection
- Remote On/Off Control

MODEL NUMBER	INPUT VOLTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT	INPUT CURRENT		% EFF.	SIZE
				NO LOAD	FULL LOAD		
CFB200-48S25	36-75 VDC	2.5 VDC	40A	25 mA	2.8A	74	Full-Brick
CFB200-48S33	36-75 VDC	3.3 VDC	40A	25 mA	3.5A	79	Full-Brick
CFB200-48S05	36-75 VDC	5 VDC	40A	25 mA	5A	83	Full-Brick
CFB200-48S12	36-75 VDC	12 VDC	17A	25 mA	5A	85	Full-Brick
CFB200-48S15	36-75 VDC	15 VDC	13.3A	25 mA	5A	85	Full-Brick
CFB200-48S24	36-75 VDC	24 VDC	8.33A	25 mA	5A	85	Full-Brick
CFB200-48S28	36-75 VDC	28 VDC	7.14A	25 mA	4.7A	89	Full-Brick
CFB200-48S48	36-75 VDC	48 VDC	4.2A	25 mA	4.7A	90	Full-Brick

NOTE: 1. Nominal Input Voltage 48 VDC

Specifications

INPUT SPECIFICATIONS:

Input Voltage Range.....48V.....36-75V
Undervoltage lockout48Vin power up34V
48Vin power down32.5V
Positive Logic Remote ON/OFF^{3,4}
Input FilterPI Type


OUTPUT SPECIFICATIONS:

Voltage Accuracy :±1% max.
Transient Response :25% Step Load Change.....<500µ sec.
External Trim Adj. Range±10%
Ripple & Noise, 20MHz BW, 2.5V & 3.3V & 5V.....40mV RMS., max.
100mV pk-pk, max.
12V & 15V.....60mV RMS., max.
150mV pk-pk, max.
24V & 28V & 48V.....100mV/150mV/200mV RMS., max.
240mV/280mV/480mV pk-pk, max.
Temperature Coefficient.....±0.03%/°C
Short Circuit Protection.....Continuous
Line Regulation¹±0.2% max.
Load Regulation²±0.2% max.
Over Voltage Protection trip Range, % Vo nom.....115-140%
Current Limit110% ~140% Nominal Output


GENERAL SPECIFICATIONS:

Efficiency.....See Table
Isolation VoltageInput/Output.....1500VDC min.
Input/Case.....1500VDC min.
Output/Case.....1500VDC min.
Isolation Resistance10⁷ ohm min.
Switching Frequency350KHz, Typ.
Operating Case Temperature-40°C to 100°C
Storage Temperature-40°C to +105°C
Thermal Shutdown, Case Temp.100°C Typ.
Dimensions4.60x2.40x0.52 inches
(116.8x61.0x13.2 mm)
Case Material.....Aluminum Baseplate with Plastic Case
Weight.....193g

Remote On/Off Control

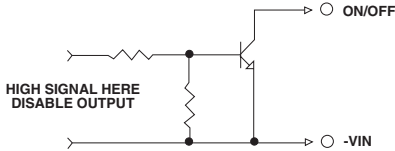

External Output Trim

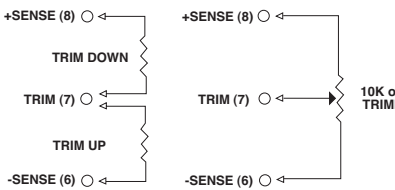

PIN CONNECTION


Pin	Function
1	+V Input
2	ON/OFF
3	NC
4	-V Input
5	-V Output
6	-Sense
7	Trim
8	+Sense
9	+Vout

NOTE:

1. Measured From High Line to Low Line.
2. Measured From Full Load to Zero Load.
3. Logic CompatibilityOpen Collector Ref. to -Input.
Module ONOpen Circuit
Module OFF.....<0.8Vdc
4. Suffix "N" to the Model Number with Negative Logic Remote ON/OFF.

CASE FB

All Dimensions In Inches(mm)
Tolerance Inches: x.xx= ±0.02, x.xxx= ±0.010
Millimeters: x.x= ±0.5, x.xx= ±0.25

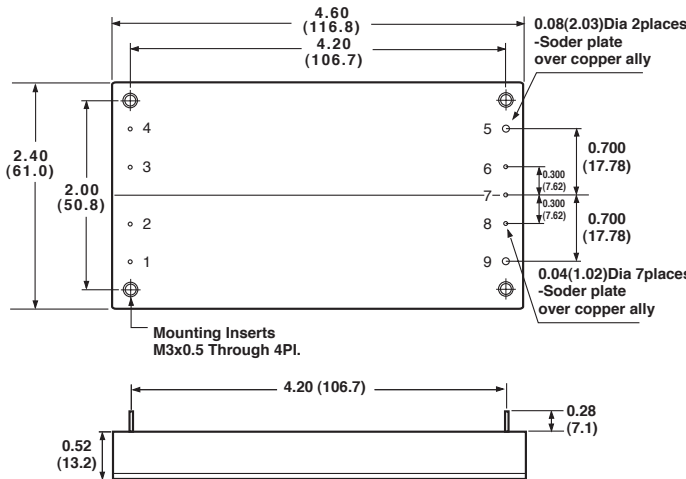

All Specifications Typical At Nominal Line, Full Load and 25°C Unless Otherwise Noted.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Cincon:

[CFB200-48S25](#) [CFB200-48S33](#) [CFB200-48S05](#) [CFB200-48S12](#) [CFB200-48S15](#) [CFB200-48S24](#) [CFB200-48S28](#)
[CFB200-48S48](#) [CFB200-48S24N](#) [CFB200-48S28N](#) [CFB200-48S25N](#) [CFB200-48S48N](#) [CFB200-48S33N](#) [CFB200-48S12N](#) [CFB200-48S15N](#) [CFB200-48S05N](#)