

NOTES:


1. ROHS COMPLIANT
2. MATERIAL:
 PANEL CONNECTOR - POLYPROPYLENE, UL RATING 94-HB
 HEADER CONNECTOR - POLYESTER, UL RATING 94-V0
 LENS - POLYCARBONATE - UL RATING 94-V2
 MOISTURE SEAL - EPDM
 RING - THERMOPLASTIC
 TERMINALS - PHOSPHOR BRONZE, TIN PLATE
 WIRE - 24 AWG 1007/1569
3. MOUNTING: HOLE SIZE .281" (7.2mm) OPENING ON 3/8" CENTERS (9.52mm)
4. PANEL THICKNESS: .030" (0.76mm) MIN TO .125" (3.18mm) MAX
 FOR PANEL THICKNESS .030" (0.76mm) TO .045" (1.14mm) USE TWO (2) SPC 060 SPACERS
 FOR PANEL THICKNESS .050" (1.27mm) TO .100" (2.54mm) USE ONE (1) SPC 060 SPACER
 FOR PANEL THICKNESS .105" (2.67mm) TO .125" (3.18mm) NO SPACER REQUIRED
5. LED LEAD LENGTH:
 FOR CMC 285 - .350" ±.010 (8.89mm ±0.25)
 FOR CMC 313, CMC 321, CMC 323, AND CMS 322 - .220" ±.010 (5.59mm ±0.25)
6. FOR STANDARD DRY APPLICATIONS USE CMC 285, CMC 313, CMC 321 OR CMC 323; FOR WET OR DRY APPLICATIONS USE CMS 322 (MEETS NEMA4/ IP56)
7. ALSO CAN BE ORDERED CNX 310 XXX FOR CONNECTOR AND RESISTOR ONLY
8. U.S. AND FOREIGN PATENT ISSUED

REVISIONS				
ECN #	REV	DESCRIPTION	DATE	INITIALS
	001	REVISED PER ECR 111009A201	2/22/11	KH

CABLE ORDERING CODE EXAMPLE:
CNX 310 056 E 4 1 08

* CALL FACTORY FOR
 ADDITIONAL OPTIONS

LED & SPACER
 (ORDER SEPERATELY)




5MM LED




SPC 060

RESISTOR *		TERMINATION *		WIRE SIZE *		WIRE COLOR *		WIRE LENGTH *	
000 =	NO RESISTOR	X =	STRIPPED END	4 =	24 AWG	1 =	WHITE - BLACK	04 =	4 INCHES (101.6mm)
012 =	120 OHMS	E =	SINGLE ROW LOCKING HEADER			2 =	RED - BLACK	06 =	6 INCHES (152.4mm)
018 =	180 OHMS	G =	SINGLE ROW PLAIN HEADER					08 =	8 INCHES (203.2mm)
033 =	330 OHMS							12 =	12 INCHES (304.8mm)
056 =	560 OHMS							18 =	18 INCHES (457.2mm)
120 =	1200 OHMS							24 =	24 INCHES (609.6mm)
220 =	2200 OHMS								

LENS
 (ORDER SEPERATELY)




CMC 285



CMC 313
 CMC 321
 CMC 323



CMS 322

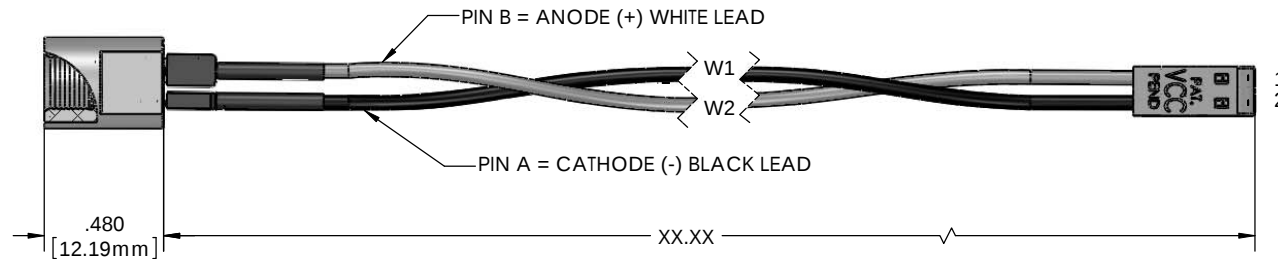

DIMENSION STYLE: INCHES / MM GENERAL TOLERANCES UNLESS OTHERWISE SPECIFIED: INCHES ±.500 MM ± 12.7  THIRD ANGLE PROJECTION PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VISUAL COMMUNICATIONS COMPANY, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF VISUAL COMMUNICATIONS COMPANY, INC. IS PROHIBITED.	MATERIAL SEE NOTES		VCC OPTOELECTRONICS 190 BOSSTICK BLVD, SUITE 101 SAN MARCOS, CA 92069 U.S.A PHONE: (760) 560-1300, FAX: (760) 560-1301 EMAIL: vccsales@vcclite.com			
	FINISH SEE NOTES					
			TITLE: CNX 310 XXX CABLE ASSEMBLY			
APPROVAL			DATE	SIZE	DWG. NO.	REV
DRAWN K.Howard			2/22/11	B	CNX 310 XXX ASSY	001
CHECKED AZ			2/22/11			
DO NOT SCALE DRAWING			SCALE: 2:1		SHEET 1 OF 1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

VCC:

[CNX_310_000](#) [CNX_310_000_X_4_1_04](#) [CNX_310_012_E_4_1_06](#) [CNX_310_012_E_4_1_12](#)
[CNX_310_012_E_4_1_24](#) [CNX_310_012_X_4_1_04](#) [CNX_310_220_X_4_1_18](#) [CNX_310_220_X_4_1_24](#)
[CNX_310_220_E_4_1_04](#) [CNX_310_220_E_4_1_06](#) [CNX_310_220_E_4_1_08](#) [CNX_310_220_E_4_1_12](#)
[CNX_310_220_X_4_1_04](#) [CNX_310_220_X_4_1_08](#) [CNX_310_120](#) [CNX_310_120_X_2_1_24](#)
[CNX_310_120_X_4_1_06](#) [CNX_310_120_X_4_1_12](#) [CNX_310_120_X_4_1_24](#) [CNX_310_220](#)
[CNX_310_033_X_4_1_06](#) [CNX_310_033_X_4_1_24](#) [CNX_310_056](#) [CNX_310_056_E_4_1_08](#)
[CNX_310_056_E_4_1_18](#) [CNX_310_056_X_4_1_12](#) [CNX_310_012_X_4_1_08](#) [CNX_310_012_X_4_1_18](#)
[CNX_310_012_X_4_1_24](#) [CNX_310_018](#) [CNX_310_018_E_4_1_12](#) [CNX_310_033](#)