THIS IS ISSUED IN STRICT CONFIDENCE THAT IT IS NOT USED AS A BASIS FOR MANUFACTURE OR SALE AND THAT IT IS NOT COPIED. REPRINTED OR DISCLOSED TO A THIRD PARTY EITHER WHOLLY OR IN PART WITHOUT THE PRIOR WRITTEN CONSENT OF CAL TEST ELECTRONICS, INC.

REVISIONS REV. DESCRIPTIONS DATE **APPROVED** CLASS A RELEASED 7/12/99 NOTE 3: ADDED IEC 61010-031 600 CAT IV & RoHS; 2/7/05 REVISED PLUG CONFIGURATION, PAGE 2.

1. 4mm BANANA PLUG LEAD, STACKING SHEATHED PLUG TO STACKING SHEATHED PLUG, 0.75mm2, SILICONE JACKETED WIRE. CE MARK AND CSA LISTED (US AND CANADA).

2. SPECIFICATIONS:

WIRE:

REINFORCED SILICONE (-60° C TO +180° C) 195x0.07mm STRANDED BARE COPPER, 0.75mm2 CROSS SECTION, 18 AWG,  $\emptyset.146\pm.008$  ( $\emptyset3.7\pm0.2$ mm) O.D.

INSULATED HOUSING:

POLYPROPYLENE THERMOPLASTIC, UL94V-0.

CONTACT:

4mm, 9 LEAF, BERYLLIUM COPPER, NICKEL PLATED.

PLUG BODY:

BRASS, NICKEL PLATED.

3. RATING:

IEC 61010-031 @ 600 V CAT IV - 1,000 V CAT III P2.

CURRENT: 12 A MAX.


INTERNAL RESISTANCE:  $55 \text{ m}\Omega$  MAX @ 200 cm LENGTH.

TEMPERATURE:  $-25^{\circ}$  C TO  $+80^{\circ}$  C.

CE DECLARATION OF CONFORMITY, LVD CONFORMS TO RoHS DIRECTIVE 2002/95/EC.





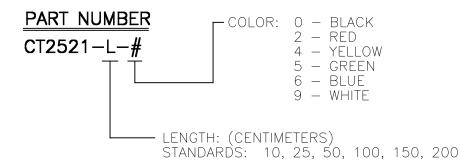

THIRD ANGLE PROJECTION		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES	CONTRACT NO.			) _ / T_	-t []-	atra air		22820 Savi Ranch Parkwa	nv.	
	$\rightarrow$	TOLERANCES ARE: FRACTIONS DECIMALS ± 1/32 .XX ± .02	APPROVALO		Cal Test Electronics 22820 Savi Ranch Parkway Yorba Linda, CA 92887-4610							
		.XXX ±.005 DO NOT SCALE DRAWING	APPROVALS  DRAWN WDH	7/12/99	TITLE	LEAD, 4mm STACKING SHEATHED PLUGS,						
	T	MATERIAL	CHECKED	77 127 33		0.75mm2, SILICONE						
		FINISH	ENGR.	1	SIZE CAGE CODE		DWG. NO.	VG. NO. DOF 0.1.00 REV		REV.		
NEXT AS	SY USED ON		DESIGN ACTIVITY A 43F4		45	P252100 A						
	APPLICATION				SCALE	scale NONE			SHEET 1 OF 2			

