

4


3

2



1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION JAN , 2002.
© COPYRIGHT 2002 BY TYCO ELECTRONICS CORPORATION. ALL INTERNATIONAL RIGHTS RESERVED.


LOC	DIST	REVISIONS 変更				
		P	LTR	DESCRIPTION	DATE	DWN APVD
J	/		E	REVISED ECR-10-010452	28MAY2010	T.T T.M
			F	REVISED, ECR-10-007304	03AUG2010	Y.O N.Y

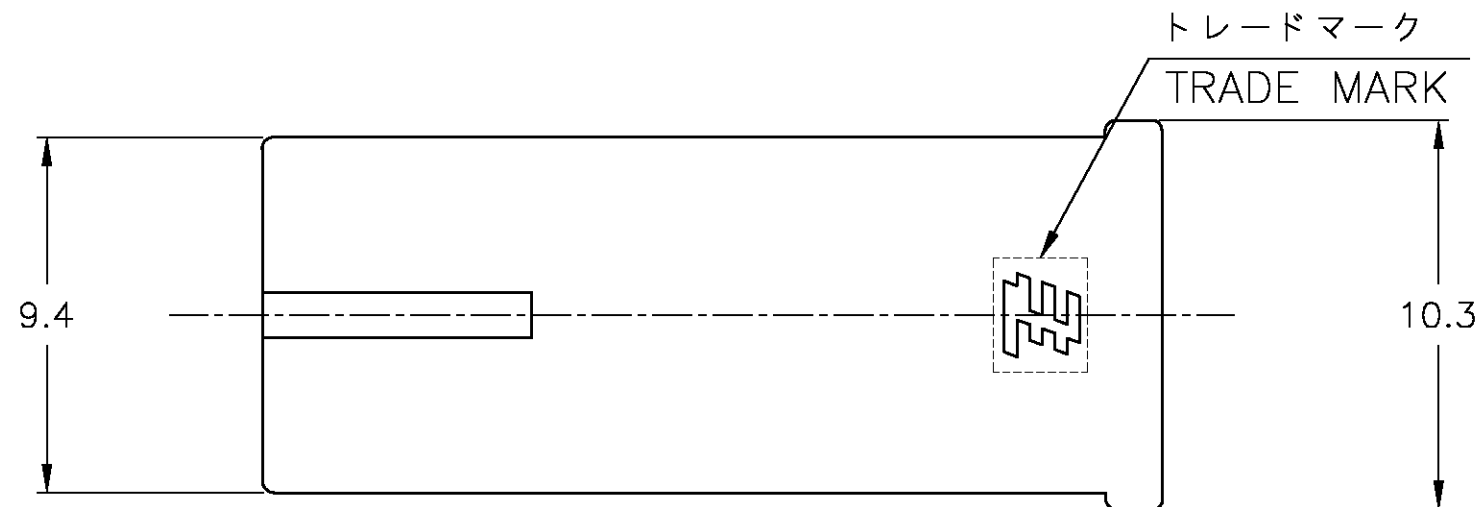

- 1 適用製品規格: 108-5437
- 2 適用コンタクト型番:
179973-X, 179974-X, 179975-X
- 3 取扱説明書: 411-5691
- 4 推奨電線径: AWG#18以上, 被覆外径2.8mm以上
より細い電線をご使用の場合は、電線が変形しないように
コンタクト装着の作業方法をご確認ください

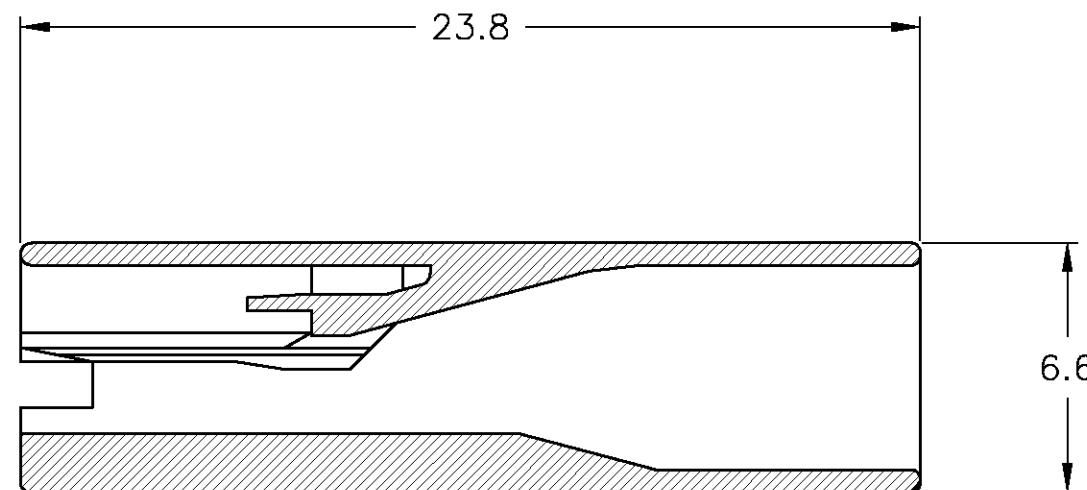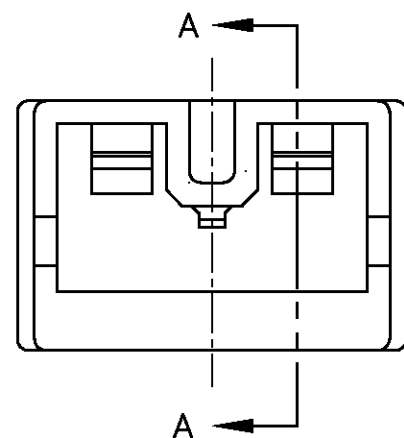

A-A

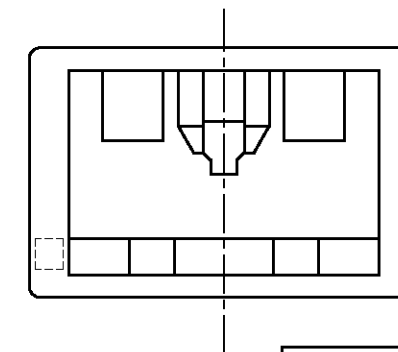

- 1 PRODUCT SPEC: 108-5437
- 2 APPLICABLE CONTACT:
179973-X, 179974-X, 179975-X
- 3 INSTRUCTION SHEET: 411-5691
- 4 RECOMMENDED WIRE
AWG: #18 OR THICKER
INSULATION DIAMETER: 2.8mm OR THICKER
IN THE CASE THAT ABOVE WIRE IS NOT USED,
PLEASE CONSIDER HOW TO INSERT CONTACT INTO HOUSING
WITHOUT WIRE DEFORMATION

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN T.HATANO	15JAN2002	 Tyco Electronics Corporation Kawasaki, Japan	
DIMENSIONS: 単位: 耗 mm		CHK A.OISHI	15JAN2002		
TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差		APVD M.SHINDO	15JAN2002	NAME 名称	
0 PLC ± ≤10:±0.2 1 PLC ± 10< ≤30:±0.25 2 PLC ± 30< ≤100:±0.3 3 PLC ± 4 PLC ANGLES ± 3°		PRODUCT SPEC 製品規格 SEE NOTE		250 SERIES POSITIVE LOCK EX-II 1 POS REC HOUSING SHROUD TYPE '250' シリーズ ポジティブロック EX-II 1極 リセハウジング シュラウドタイプ	
MATERIAL 材料 SEE TABLE		APPLICATION SPEC 取付適用規格		SIZE A3	CAGE CODE 00779
FINISH 仕上		WEIGHT		DRAWING NO 番号 C-1318954	RESTRICTED TO
CUSTOMER DRAWING		SCALE 尺度 5:1		SHEET 1 OF 1	REV F

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-1318954-1](#)