


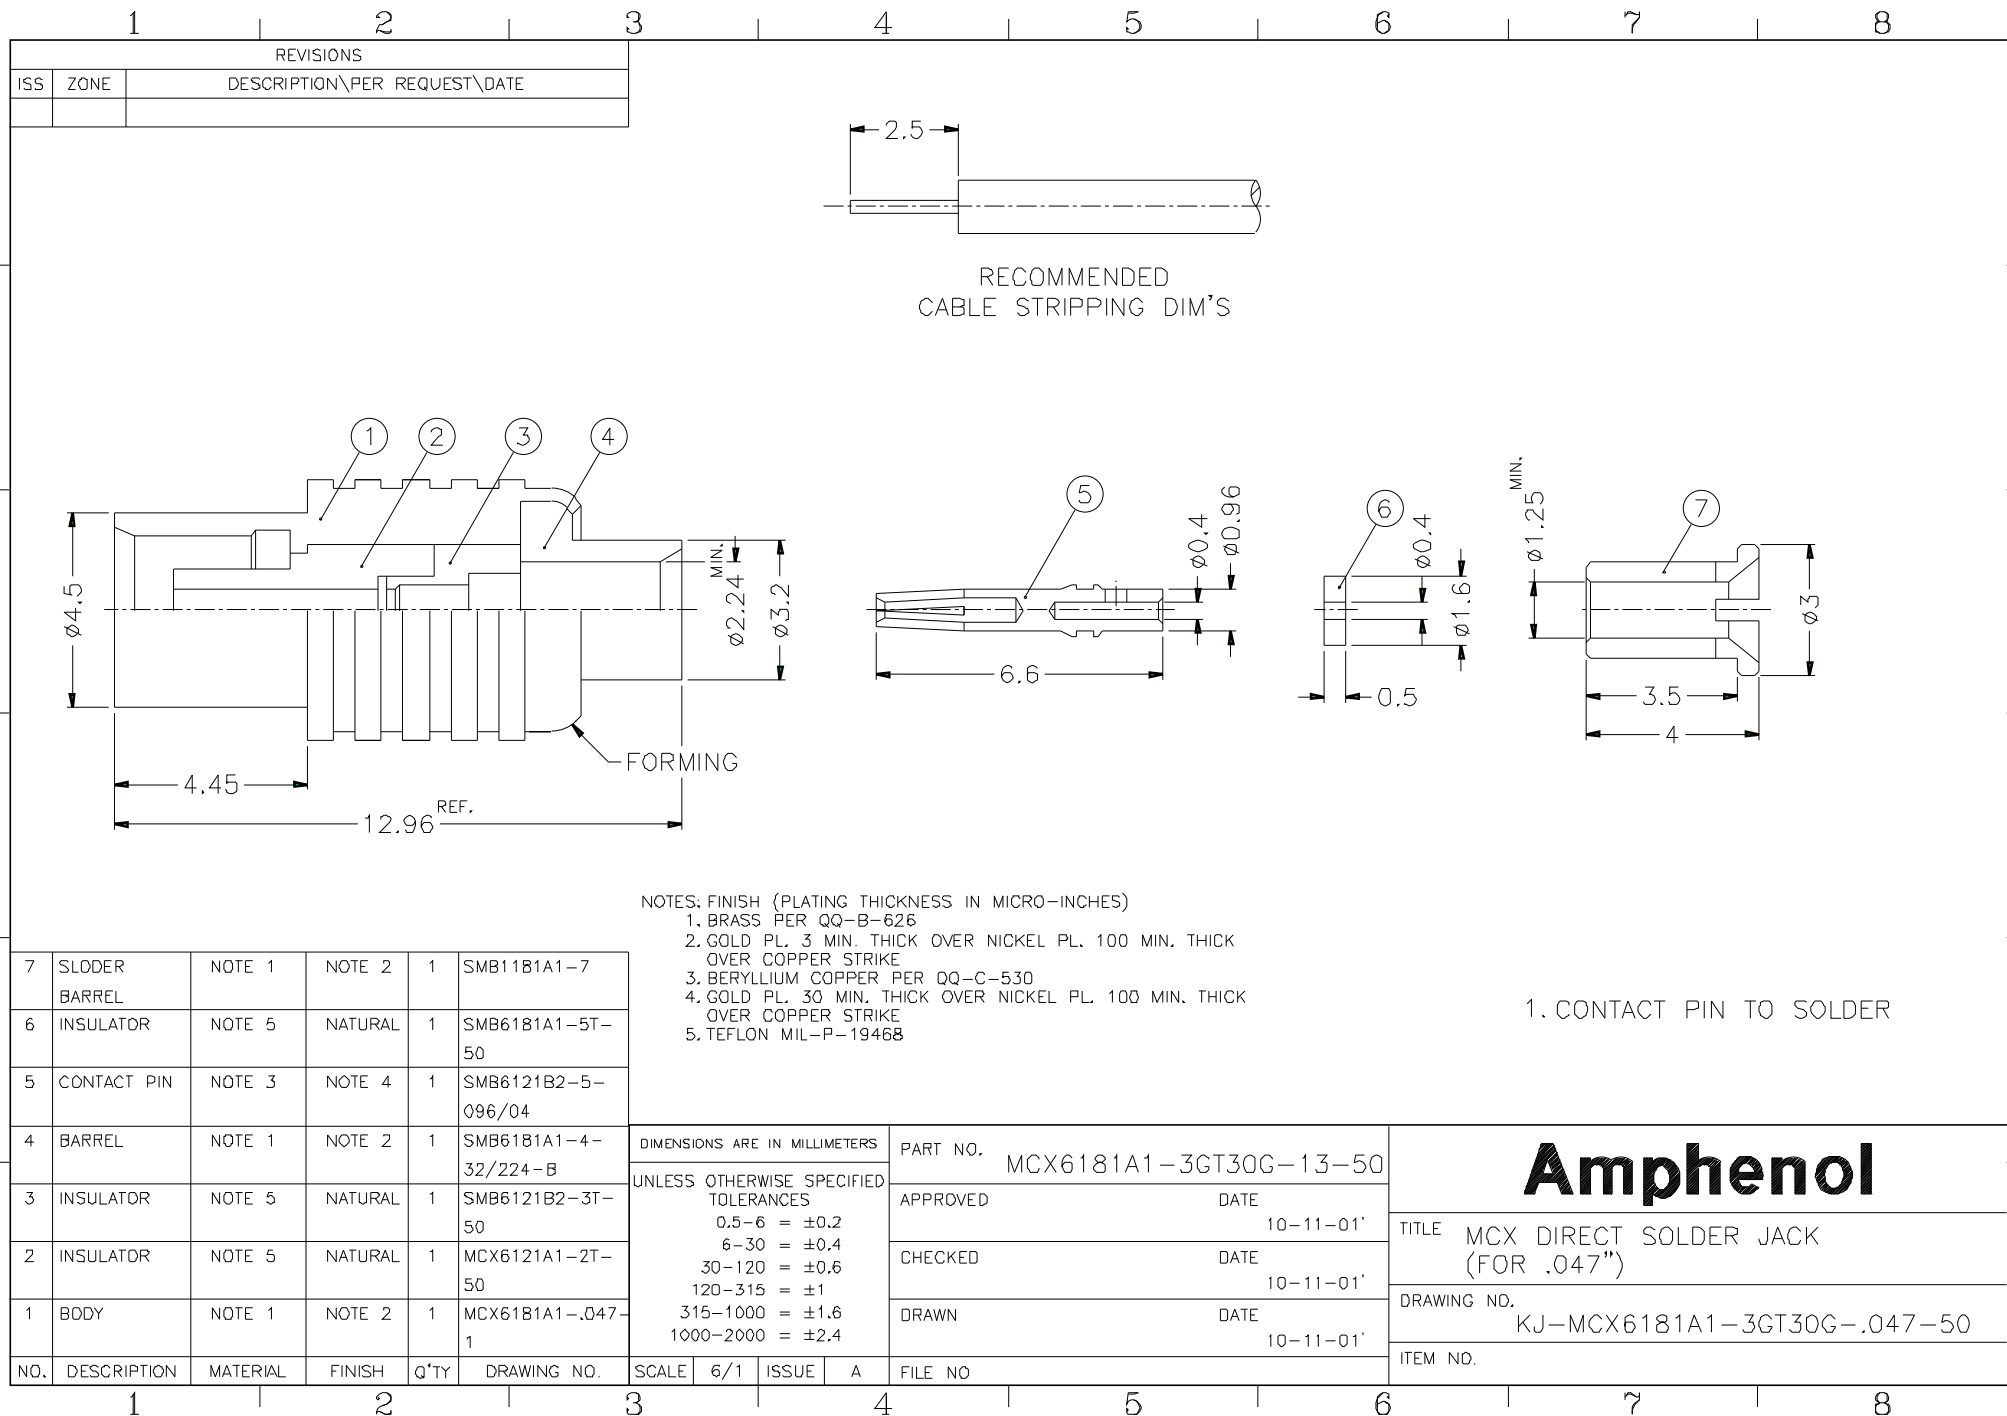

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS PER QQ-B-626
2. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
3. BERYLLIUM COPPER PER QQ-C-530
4. GOLD PL. 30 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
5. TEFLON MIL-P-19468

1. CONTACT PIN TO SOLDER

7	SLODDER BARREL	NOTE 1	NOTE 2	1	SMB1181A1-7
6	INSULATOR	NOTE 5	NATURAL	1	SMB6181A1-5T-50
5	CONTACT PIN	NOTE 3	NOTE 4	1	SMB6121B2-5-096/04
4	BARREL	NOTE 1	NOTE 2	1	SMB6181A1-4-32/224-B
3	INSULATOR	NOTE 5	NATURAL	1	SMB6121B2-3T-50
2	INSULATOR	NOTE 5	NATURAL	1	MCX6121A1-2T-50
1	BODY	NOTE 1	NOTE 2	1	MCX6181A1-.047-1
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.

DIMENSIONS ARE IN MILLIMETERS				PART NO.	MCX6181A1-3GT30G-13-50
UNLESS OTHERWISE SPECIFIED TOLERANCES 0.5-6 = ±0.2 6-30 = ±0.4 30-120 = ±0.6 120-315 = ±1 315-1000 = ±1.6 1000-2000 = ±2.4				APPROVED	DATE 10-11-01'
				CHECKED	DATE 10-11-01'
				DRAWN	DATE 10-11-01'
SCALE	6/1	ISSUE	A	FILE NO	

Amphenol		
TITLE MCX DIRECT SOLDER JACK (FOR .047")		
DRAWING NO. KJ-MCX6181A1-3GT30G-.047-50		
ITEM NO.		