

## SUMMARY

### # Wires

Low	0
High	0
Coax	1
Triax	0
Quad	0
Fiber	0
Fluidic	0



### Download

[Request a quote](#)[Catalog](#)

Series	0S
Termination type	Male solder
IP rating	50
Cable Ø	5.30 - 6.20 mm
Matching parts	ERA.0S.250.CTL

## TECHNICAL DETAILS

### Mechanics

Shell Style/Model	FFA*: Straight plug with oversize cable collet
Keying	Circular (can rotate), plug has male contact(s)
Housing Material	Brass (chrome plated) shell and collet nut, nickel plated brass latch sleeve and mid pieces
Cable Fixing	K62: 5.3 - 6.2 mm
Variant	

### Performance

Configuration	0S.250 : 1 Coax (50 Ohm)
Insulator	T: PTFE
Rated Current	6 Amps

### Specifications


Contact Type: Coaxial 50 Ohm (Solder)
Max. Matings: 1000
Contact Dia.: 0.9 mm (0.035in)
Bucket Dia.: 1 mm (0.039in)
Vtest: 3000 V (AC), 4200 V (DC)
Impedance: 50 Ohm
VSWR: 1.02 + 0.25 * f/GHz
Cable type: RG 178 B/U, RG 196 A/U, RG 188 A/U, RG 316 B/U, RG 174 A/U, HF-2114, RG 122 /U

Others

Endurance (Shell): 5000 mating cycles  
Temp (min / max): -55°C / +250°C  
Humidity (max): <=95% [at 60 deg C /140 F]  
Vibration: 15 g [10 Hz - 2000 Hz]  
Shock Resistance: 100 g [ 6 ms]  
Salt Spray Corrosion: >144 hr  
Climatical Category: 50/175/21  
Shielding (min): 75 dB (10 MHz)  
Shielding (min): 40 dB (1 GHz)  
IP Rating: 50

DRAWINGS

Draws

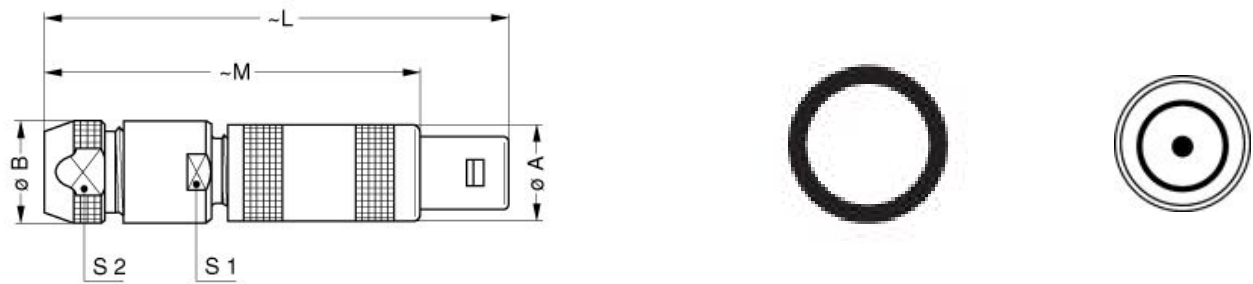

Dimensions

	A	B	L	M	S1	S2
mm.	9	10	45.5	35.5	9	8.5
in.	0,35	0,39	1,79	1,40	0,35	0,33

RECOMMENDED BY LEMO

Tools

Spanner wrench: MTZ.0S.045.065

Cables