

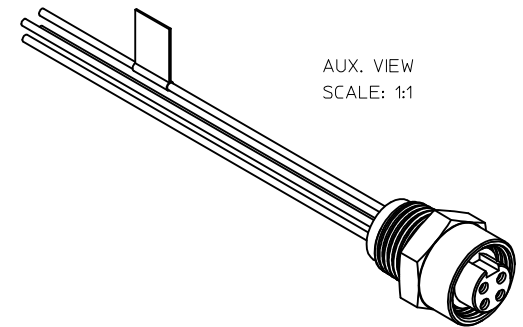



MATERIAL NO.	ENGINEERING NO.	LENGTH
1300130300	1R4000A39M010	3' 3" +2.18 -0 (1.0M + 55.6mm -0)
1300130301	1R4000A39M020	6' 7" +3.50 -0 (2.0M + 88.9mm -0)

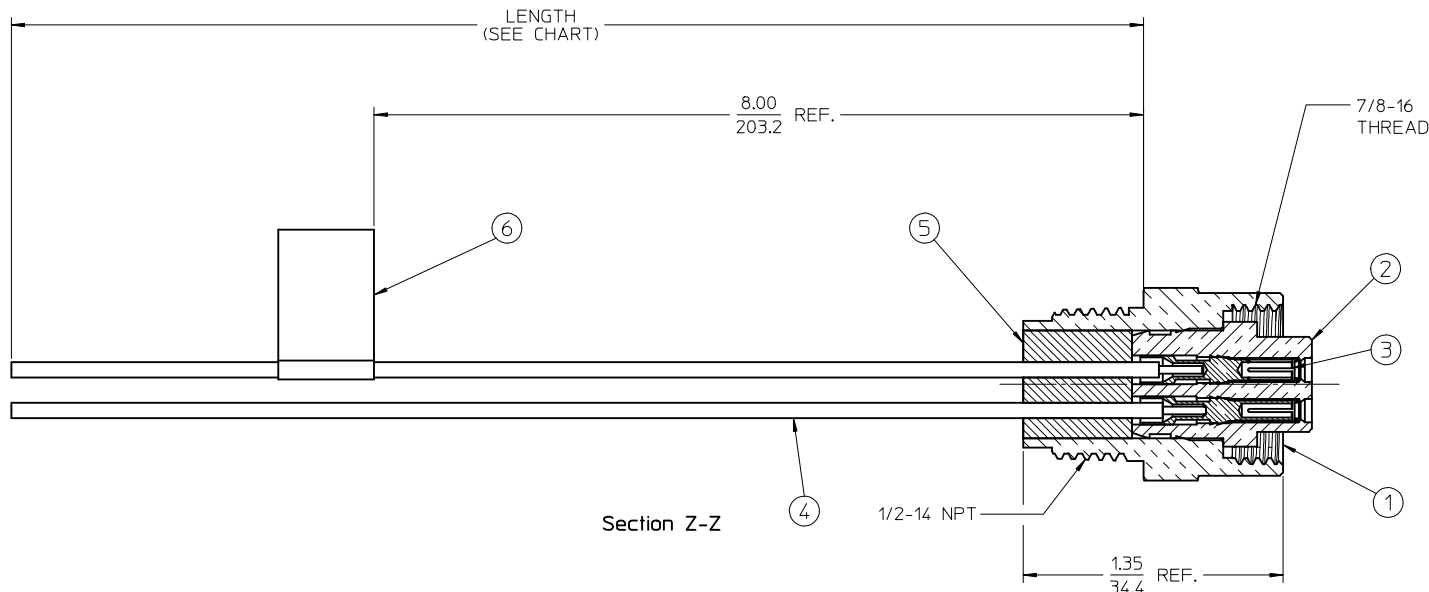

AUX. VIEW
SCALE: 1:1

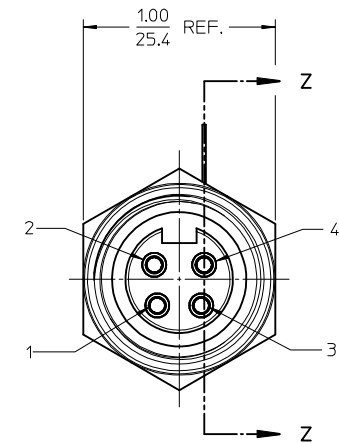


WIRE DIAGRAM



PIN-OUT PER CENELEC COLOR CODE

- NOTES:
- 1. MATERIAL: SEE TABLE
 - 2. FINISHES: SEE TABLE
 - 3. MATES WITH: 4C MINI CHANGE CABLE
 - 4. ELECTRICAL SPECIFICATIONS:
VOLTAGE RATING: 600V AC/DC
CURRENT RATING: 10.0 AMPS
 - 5. ASSEMBLY IS RoHS COMPLIANT



ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH
6	1	LABEL	PLASTIC FILM	BLACK/YELLOW
5	1	POTTING MATERIAL	EPOXY	
4	4	WIRE, 16 AWG	PVC INSULATION	SEE WIRE DIAGRAM
3	4	CONTACT SOCKET & SLEEVE ASSY.	Cu ALLOY/ST.STEEL	GOLD PLATED
2	1	INSERT	PVC	YELLOW
1	1	RECEPTACLE SHELL	ZINC DIE-CAST	NICKEL PLATED

SHELL WAS ALUMINUM EC NO: IPG2014-0062 DRAWN BY: DRWNRSTONE 2013/07/09 CHKD BY: WOODMAN 2013/07/12 APPR: BWOODMAN 2013/08/16	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED) mm INCH 4 PLACES ± --- ± --- 3 PLACES ± --- ± --- 2 PLACES ± --- ± .01 1 PLACE ± 0.3 ± --- ANGULAR ± 1/2°	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	DIMENSION STYLE IN/MM		SCALE 2:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION
				DRAWN BY R.STONE	DATE 2009/08/25	TITLE MINI-CHANGE, RECEPTACLE 4P, FEMALE, 16 AWG		
				CHECKED BY B.WOODMAN	DATE 2009/08/27	MOLEX INCORPORATED		
				APPROVED BY JFMURPHY	DATE 2009/08/26	SD-130013-086		
MATERIAL NO. SEE CHART		DOCUMENT NO. SD-130013-086		SHEET NO. 1 OF 1				
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION								