




FX16 Series

ITS-P-07030H_1

Next generation high speed
connector up to 5.7 Gbps

*Supports
next gen. chip
V-by-One® HS*
by THine*


*High speed serial
interface technology for
picture transmission

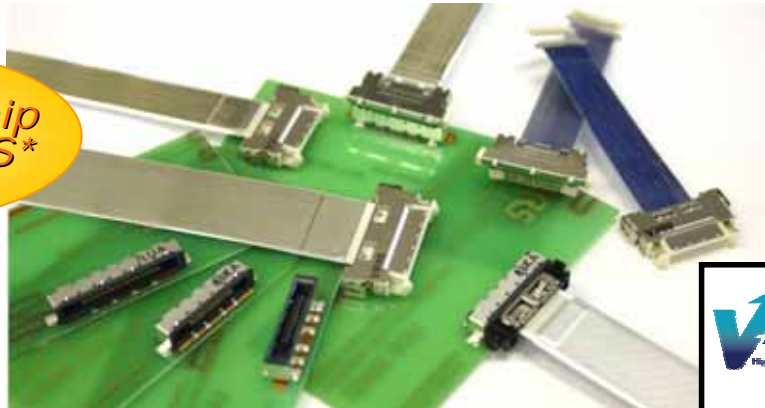

◆ Features

1. Next generation impedance controlled high speed connector up to 5.7 Gbps transmission.
Supports Second-Generation DisplayPort signal transmission
2. 0.5 mm pitch, single-row contact arrangement for equal length of transmission line.
3. EMI prevention with metal shell and covered rear end.
4. Improved click feeling and user friendliness by new side lock design.
5. Robust structure
6. Common plug component for shielded FFC and micro coaxial cable
7. Wide varieties in mating style, cable type, and number of positions.
Available positions: 21, 31, 41 and 51 pos.
8. RoHS compliant

◆ Varieties

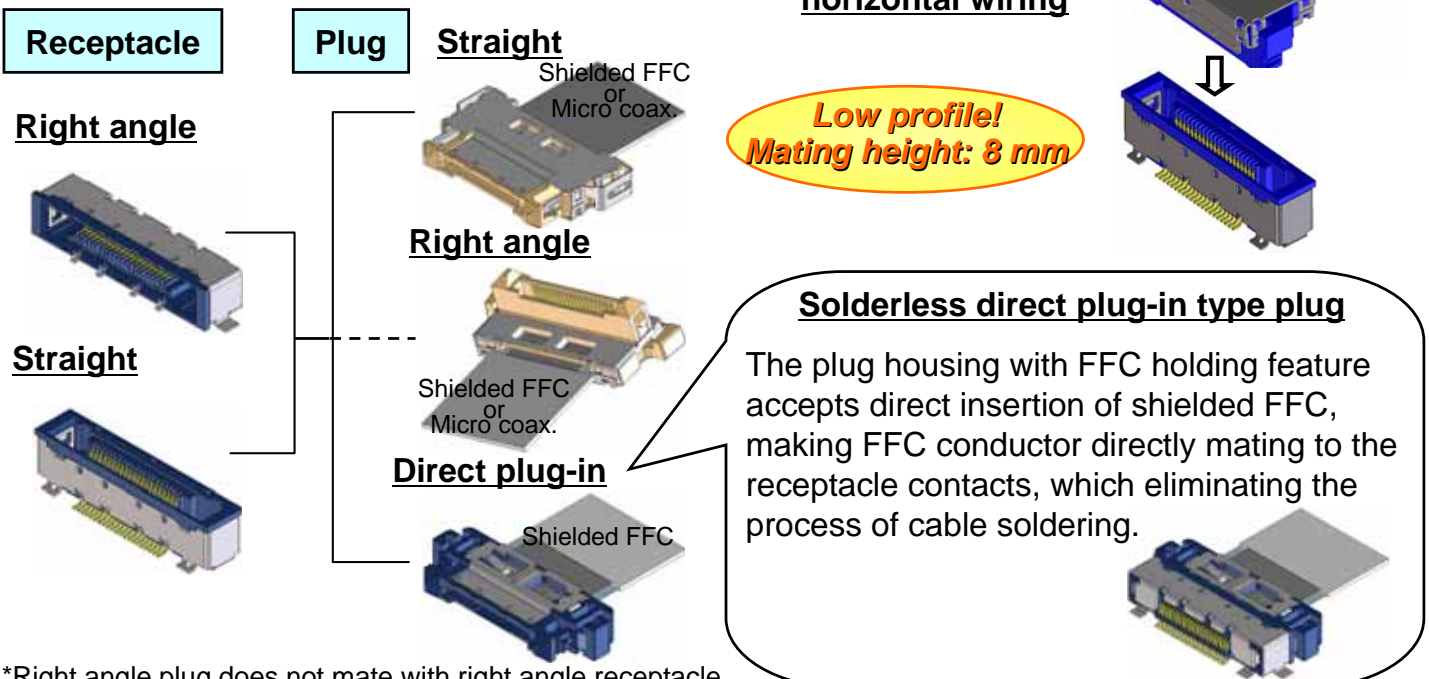

*Right angle plug does not mate with right angle receptacle.

Specifications herein are subject to change without notice. Contact Hirose for latest specifications, drawings or availabilities.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[FX16-21P-0.5SDL](#) [FX16-21P-HC](#) [FX16-31P-0.5SDL](#) [FX16-31P-HC](#)