


OMNIMATE Signal - series BL/SL 5.08
BLZ 5.08/11/180 SN OR BX

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
www.weidmueller.com

Do not use product for new developments

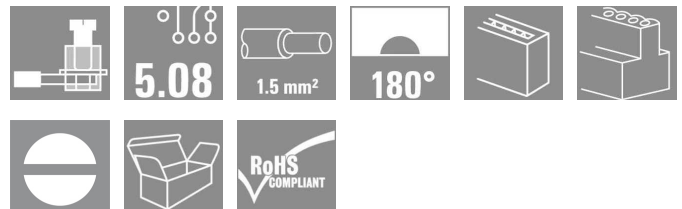

Female plugs with clamping-yoke screw for wire connection with straight (180°) outlet direction. The female plugs provide space for labelling and can be coded.

- 0.2 - 2.5 mm² (IEC) / 26 - 12 AWG (UL)
- 400 V (IEC) / 300 V (UL)
- 19 A (IEC) / 15 A (UL)

General ordering data

Delivery status	This article will no longer be available in the future.
Available until	2015-12-31
Type	BLZ 5.08/11/180 SN OR BX
Order No.	1527360000
Version	PCB plug-in connector, female plug, 5.08 mm, No. of poles: 11, 180°, Clamping yoke connection, Clamping range, rated connection, max.: 3.31 mm ² , Box
GTIN (EAN)	4008190017958
Qty.	40 pc(s).
Product data	IEC: 400 V / 19 A / 0.2 - 2.5 mm ² UL: 300 V / 15 A / AWG 26 - AWG 12
Packaging	Box
Alternative product	1943670000

OMNIMATE Signal - series BL/SL 5.08 BLZ 5.08/11/180 SN OR BX

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Technical data

Dimensions and weights

Net weight	18.45 g
------------	---------

System parameters

Product family	OMNIMATE Signal - series BL/SL 5.08	Wire connection method	Clamping yoke connection
Conductor outlet direction	180°	Pitch in mm (P)	5.08 mm
Pitch in inches (P)	0.2 inch	No. of poles	11
Screwdriver blade	0.6 x 3.5	Screwdriver blade standard	DIN 5264
Tightening torque, min.	0.4 Nm	Tightening torque, max.	0.5 Nm
Clamping screw	M 2.5	Stripping length	7 mm
L1 in mm	50.8 mm	L1 in inches	2 inch
Touch-safe protection acc. to DIN VDE 0470	IP 20	Touch-safe protection acc. to DIN VDE 57 106	Safe from finger touch
Volume resistance	4.50 mΩ		

Material data

Insulating material	PBT	Moisture Level (MSL)	3
Colour	Orange	Colour chart (similar)	RAL 2000
UL 94 flammability rating	V-0	CTI	≥ 200
Contact material	Cu-Leg	Contact surface	tinned
Contact base material	Cu-Leg	Operating temperature, min.	-50 °C
Operating temperature, max.	100 °C	Temperature range, installation, min.	-25 °C
Temperature range, installation, max.	100 °C		

Connectable conductors

Clamping range, rated connection, min.	0.13 mm ²	Clamping range, rated connection, max.	3.31 mm ²
Wire connection cross section AWG, min.	AWG 26	Wire connection cross section AWG, max.	AWG 12
Solid, min. H05(07) V-U	0.2 mm ²	Solid, max. H05(07) V-U	2.5 mm ²
Flexible, min. H05(07) V-K	0.2 mm ²	Flexible, max. H05(07) V-K	2.5 mm ²
w. wire end ferrule, DIN 46228 pt 1, min.	0.2 mm ²	w. wire end ferrule, DIN 46228 pt 1, max.	2.5 mm ²
w. plastic collar ferrule, DIN 46228 pt 4, min.	0.2 mm ²	w. plastic collar ferrule, DIN 46228 pt 4, max.	2.5 mm ²
Plug gauge acc. to EN 60999 a x b; Ø	2.8 mm x 2.0 mm; 2.4 mm		

Rating data acc. to IEC 60664-1 / IEC 61984

Rated current, min. no. of poles (Tu=20°C)	19 A	Rated current, max. no. of poles (Tu=20°C)	14.5 A
Rated current, number of poles (Tu=40°C), min	16 A	Rated current, number of poles (Tu=40°C), max.	12.5 A
Rated voltage for surge voltage class / pollution degree II/2	400 V	Rated voltage for surge voltage class / pollution degree III/2	320 V
Rated voltage for surge voltage class / pollution degree III/3	250 V	Rated impulse voltage for surge voltage class/ pollution degree II/2	4 kV
Rated impulse voltage for surge voltage class/ pollution degree III/2	4 kV	Rated impulse voltage for surge voltage class/ contamination degree III/3	4 kV
Short-time withstand current resistance	3 x 1s with 120 A		

**OMNIMATE Signal - series BL/SL 5.08
BLZ 5.08/11/180 SN OR BX**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data**CSA rating data**

Institute (CSA)



Certificate No. (CSA)

200039-1121690

Rated voltage (Use group B) 300 V

Rated current (use group B) 15 A

Rated voltage (use group D) 300 V

Rated current (use group D) 10 A

Wire cross-section, AWG, min. AWG 26

Wire cross-section, AWG, max. AWG 12

UL 1059 rating data

Institute (UR)



Certificate No. (UR)

E60693

Rated voltage (use group B) 300 V

Rated current (use group B) 15 A

Rated voltage (use group D) 300 V

Rated current (use group D) 10 A

Wire cross-section, AWG, min. AWG 26

Wire cross-section, AWG, max. AWG 12

Classifications

ETIM 3.0

EC001284

ETIM 4.0

EC002637

ETIM 5.0

EC002637

ETIM 6.0

EC002637

UNSPSC

30-21-18-10

eClass 5.1

27-26-07-04

eClass 6.2

27-26-07-04

eClass 7.1

27-44-04-02

Notes

Notes

- Additional colours on request
- Gold-plated contact surfaces on request
- Rated current related to rated cross-section & min. No. of poles.
- Wire end ferrule without plastic collar to DIN 46228/1
- Wire end ferrule with plastic collar to DIN 46228/4
- P on drawing = pitch
- Rated data refer only to the component itself. Clearance and creepage distances to other components are to be designed in accordance with the relevant application standards.

IPC conformity

The products are developed, manufactured and delivered according to the internationally recognised IPC-A-610 standard, category "permissible". More extensive demands on the products can be evaluated on request.

Approvals

Approvals




ROHS

Conform

OMNIMATE Signal - series BL/SL 5.08 BLZ 5.08/11/180 SN OR BX

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Drawings

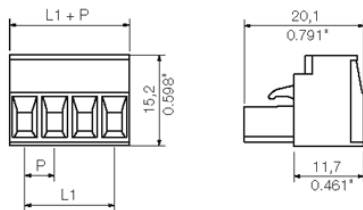

OMNIMATE Signal - series BL/SL 5.08 BLZ 5.08/11/180 SN OR BX

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Mating connector (conditionally pluggable)

SL 5.08/90B



Male connectors with 90° outlet direction. The solder pin length is optimised for wave flow soldering. The pin headers provide space for labelling and can be coded.

- 400 V (IEC) / 300 V (UL)
- 18 A (IEC) / 15 A (UL)

General ordering data

Delivery status Available until	Type	Order No.	Version	GTIN (EAN)	Qty.
This article will no longer be available in the future.	SL 5.08/11/90B 3.2SN OR BX	1511260000	PCB plug-in connector, male header, Dovetails for fixing blocks, Solder connection, 5.08 mm, No. of poles: 11, Solder pin length (l): 3.2 mm, tinned, Orange, Box	4008190052584	50 pc(s).

SLZF 5.08/180F



Male plugs with tension-clamp wire connection. The male plugs provide space for labelling and can be coded.

- 0.2 - 2.5 mm² (IEC) / 26 - 14 AWG (UL)
- 400 V (IEC) / 300 V (UL)
- 23 A (IEC) / 15 A (UL)

General ordering data

Delivery status Available until	Type	Order No.	Version	GTIN (EAN)	Qty.
This article will no longer be available in the future.	SLZF 5.08/11/180F SN OR BX	1847060000	PCB plug-in connector, male plug, 5.08 mm, No. of poles: 11, 180°, Tension clamp connection, Clamping range, rated connection, max.: 3.31 mm ² , Box	4032248363209	50 pc(s).

OMNIMATE Signal - series BL/SL 5.08 BLZ 5.08/11/180 SN OR BX

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Mating connector (conditionally pluggable)

SL 5.08/135B



Male connectors with 135° outlet direction. The solder pin length is optimised for wave flow soldering. The pin headers provide space for labelling and can be coded.

- 400 V (IEC) / 300 V (UL)
- 17 A (IEC) / 15 A (UL)

General ordering data

Type	Order No.	Version	GTIN (EAN)	Qty.	Product data	Packaging
SL	1605620000	PCB plug-in connector, male	4008190177508	50 pc(s).	IEC: 400 V / 17 A	Box
5.08/11/135B		header, Dovetails for fixing			UL: 300 V / 15 A	
3.2SN OR BX		blocks, Solder connection,				
		5.08 mm, No. of poles: 11,				
		135°, Solder pin length (l):				
		3.2 mm, tinned, Orange,				
		Box				

SL-SMT 5.00HC/90LF Box



High-temperature-resistant pin header, packed in box or tape. On tape, with 1.5 mm solder pin, optimised for automatic assembly. 3.2 mm solder pin suitable for reflow and wave soldering. The pin headers provide space for labelling and can be coded. HC = High Current.

General ordering data

Type	Order No.	Version	GTIN (EAN)	Qty.	Product data	Packaging
SL-SMT	1840440000	PCB plug-in connector,	4032248351282	50 pc(s).	IEC: 400 V / 27.5 A	Box
5.00HC/11/90LF		male header, Solder flange,			UL: 300 V / 18.5 A	
3.2SN BK BX		Reflow solder connection,				
		5.00 mm, No. of poles: 11,				
		90°, Solder pin length (l):				
		3.2 mm, tinned, Black, Box				
2014-05-20T08:50:00 SL-SMT 5.00HC/11/90LF 1.5SN BK BX	1797320000	PCB plug-in	4032248238101	50 pc(s).	IEC:	
		connector, male			400	
		header, Solder			V /	
		flange, Reflow			27.5	
		solder connection,			A	
		5.00 mm, No.			UL:	
		of poles: 11,			300	
		90°, Solder pin			V /	
		length (l): 1.5 mm,			18.5	
		tinned, Black, Box			A	

OMNIMATE Signal - series BL/SL 5.08 BLZ 5.08/11/180 SN OR BX

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Mating connector (conditionally pluggable)

SLT 5.08B



Male plugs with screw TOP wire connection. The male plug provides space for labelling and can be coded.

- 0.2 - 2.5 mm² (IEC) / 26 - 14 AWG (UL)
- 400 V (IEC) / 300 V (UL)
- 16 A (IEC) / 10 A (UL)

General ordering data

Type	Order No.	Version	GTIN (EAN)	Qty.	Product data	Packaging
SLT 5.08/11/180B SN OR BX	1611800000	PCB plug-in connector, male plug, 5.08 mm, No. of poles: 11, 180°, TOP connection, Clamping range, rated connection, max.: 2.5 mm ² , Box	4008190192686	50 pc(s).	IEC: 400 V / 16 A / 0.2 - 2.5 mm ² UL: 300 V / 15 A / AWG 26 - AWG 14	Box

SLZF 5.08/180FI



Male plugs with tension-clamp wire connection. The male plugs provide space for labelling and can be coded.

- 0.2 - 2.5 mm² (IEC) / 26 - 14 AWG (UL)
- 400 V (IEC) / 300 V (UL)
- 23 A (IEC) / 15 A (UL)

General ordering data

Available until	Type	Order No.	Version	GTIN (EAN)	Qty.	Product data
2014-06-23	SLZF 5.08/180FI SN OR BX	1846600000	PCB plug-in connector, male plug, 5.08 mm, No. of poles: 11, 180°, Tension clamp connection, Clamping range, rated connection, max.: 3.31 mm ² , Box	4032248362905	50 pc(s).	IEC: 400 V / 23 A / 0.2 - 2.5 mm ² UL: 300 V / 15 A / AWG 26 -


OMNIMATE Signal - series BL/SL 5.08 BLZ 5.08/11/180 SN OR BX

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Mating connector (conditionally pluggable)

AWG
12

SLS 5.08/180B



Male plugs with clamping-yoke screw wire-connect system. The male plugs provide space for labelling and can be coded.

- 0.2 - 2.5 mm² (IEC) / 26 - 12 AWG (UL)
- 400 V (IEC) / 300 V (UL)
- 21.5 A (IEC) / 15 A (UL)

General ordering data

Type	Order No.	Version	GTIN (EAN)	Qty.	Product data	Packaging
SLS	1627330000	PCB plug-in connector,	4008190199845	30 pc(s).	IEC: 400 V / 21.5 A / 0.2 - 2.5 mm ²	Box
5.08/11/180B		male plug, 5.08 mm, No. of			UL: 300 V / 14 A / AWG 26 - AWG 12	
SN OR BX		poles: 11, 180°, Clamping				
		yoke connection, Clamping				
		range, rated connection,				
		max.: 3.31 mm ² , Box				

SLZF 5.08/90B



Male plugs with tension-clamp wire connection. The male plugs provide space for labelling and can be coded.

- 0.2 - 2.5 mm² (IEC) / 26 - 14 AWG (UL)
- 400 V (IEC) / 300 V (UL)
- 23 A (IEC) / 15 A (UL)

General ordering data

Available until	Type	Order No.	Version	GTIN (EAN)	Qty.	Product data
2014-06-23	SLZF 5.08/90B SN OR BX	1673640000	PCB plug-in connector, male plug, 5.08 mm, No. of poles: 11, 90°, Tension clamp connection, Clamping range, rated connection, max.: 3.31 mm ² , Box	4008190435356	50 pc(s).	IEC: 400 V / 20.5 A / 0.2 - 2.5 mm ² UL: 300 V / 15 A /

OMNIMATE Signal - series BL/SL 5.08

BLZ 5.08/11/180 SN OR BX

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Mating connector (conditionally pluggable)

AWG
26
-
AWG
12

SL-SMT 5.08HC/90LF Box



High-temperature-resistant pin header, packed in box or tape. On tape, with 1.5 mm solder pin, optimised for automatic assembly. 3.2 mm solder pin suitable for reflow and wave soldering. The pin headers provide space for labelling and can be coded. HC = High Current.

General ordering data

Type	Order No.	Version	GTIN (EAN)	Qty.	Product data	Packaging
SL-SMT	1780500000	PCB plug-in connector,	4032248165827	50 pc(s).	IEC: 400 V / 27.5 A	Box
5.08HC/11/90LF		male header, Solder flange,			UL: 300 V / 18.5 A	
3.2SN BK BX		Reflow solder connection,				
		5.08 mm, No. of poles: 11,				
		90°, Solder pin length (l):				
		3.2 mm, tinned, Black, Box				
2014-05-20T08:05:00	1775322001	PCB plug-in	4032248157303	50 pc(s).	IEC:	
SL-SMT 5.08HC		connector, male			400	
		header, Solder			V /	
		flange, Reflow			27.5	
		solder connection,			A	
		5.08 mm, No.			UL:	
		of poles: 11,			300	
		90°, Solder pin			V /	
		length (l): 1.5 mm,			18.5	
		tinned, Black, Box			A	

OMNIMATE Signal - series BL/SL 5.08 BLZ 5.08/11/180 SN OR BX

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Mating connector (conditionally pluggable)

SL-SMT 5.08/180F Box



High-temperature-resistant pin header, packed in box or tape. On tape, with 1.5 mm solder pin, optimised for automatic assembly. 3.2 mm solder pin suitable for reflow and wave soldering. The pin headers provide space for labelling and can be coded. HC = High Current.

General ordering data

Type	Order No.	Version	GTIN (EAN)	Qty.	Product data	Packaging
SL-SMT	1837900000	PCB plug-in connector, male	4032248347711	50 pc(s).	IEC: 400 V / 27.5 A	Box
5.08HC/11/180F		header, Flange, Reflow			UL: 300 V / 18.5 A	
3.2SN BK BX		solder connection, 5.08 mm, No. of poles: 11, 180°, Solder pin length (l): 3.2 mm, tinned, Black, Box				

SLS 5.08/180F



Male plugs with clamping-yoke screw wire-connect system. The male plugs provide space for labelling and can be coded.

- 0.2 - 2.5 mm² (IEC) / 26 - 12 AWG (UL)
- 400 V (IEC) / 300 V (UL)
- 21.5 A (IEC) / 15 A (UL)

General ordering data

Type	Order No.	Version	GTIN (EAN)	Qty.	Product data	Packaging
SLS	1846450000	PCB plug-in connector, male plug, 5.08 mm, No. of poles: 11, 180°, Clamping yoke connection, Clamping range, rated connection, max.: 3.31 mm ² , Box	4032248362752	24 pc(s).	IEC: 400 V / 21.5 A / 0.2 - 2.5 mm ²	Box
5.08/11/180F					UL: 300 V / 14 A / AWG 26 - AWG 12	
SN OR BX						

OMNIMATE Signal - series BL/SL 5.08

BLZ 5.08/11/180 SN OR BX

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Mating connector (conditionally pluggable)

SL 5.00/90B



Male connectors with 90° outlet direction. The solder pin length is optimised for wave flow soldering. The pin headers provide space for labelling and can be coded.

- 400 V (IEC) / 300 V (UL)
- 18 A (IEC) / 15 A (UL)

General ordering data

Type	Order No.	Version	GTIN (EAN)	Qty.	Product data	Packaging
SL	1580950000	PCB plug-in connector, male	4008190029739	50 pc(s).	IEC: 400 V / 18 A	Box
5.00/11/90B		header, Dovetails for fixing			UL: 300 V / 15 A	
3.2SN OR BX		blocks, Solder connection,				
		5.00 mm, No. of poles: 11,				
		90°, Solder pin length (l):				
		3.2 mm, tinned, Orange,				
		Box				

SLDV-THR 5.08/180FLF



High-temperature resistant, double level, laterally offset, male connector with flange or solder flange. 1.5 mm solder pin is suitable for reflow soldering. 3.2 mm solder pin suitable for reflow and wave soldering. The pin headers provide space for labelling and can be coded.

- 400 V (IEC) / 300 V (UL)
- 15 A (IEC) / 10 A (UL)

General ordering data

Type	Order No.	Version	GTIN (EAN)	Qty.	Product data	Packaging
SLDV-THR	1829100000	PCB plug-in connector,	4032248335794	10 pc(s).	IEC: 400 V / 15 A	Box
5.08/22/180FLF		male header, Flange /			UL: 300 V / 10 A	
3.2SN BK BX		Solder flange, Reflow solder				
		connection, 5.08 mm, No.				
		of poles: 22, 180°, Solder				
		pin length (l): 3.2 mm,				
		tinned, Black, Box				
2014-05-20T08:00:00	1829220000	PCB plug-in	4032248335916	10 pc(s).	IEC:	
SLDV-THR 5.08/22/180FLF 1.5SN BK BX		connector, male			400	
		header, Flange /			V /	
		Solder flange,			15	
		Reflow solder			A	
		connection, 5.08			UL:	
		mm, No. of poles:			300	
		22, 180°, Solder			V /	
		pin length (l): 1.5			10	
					A	

OMNIMATE Signal - series BL/SL 5.08 BLZ 5.08/11/180 SN OR BX

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Mating connector (conditionally pluggable)

mm, tinned, Black,
Box

SLZF 5.08/180B



Male plugs with tension-clamp wire connection. The male plugs provide space for labelling and can be coded.

- 0.2 - 2.5 mm² (IEC) / 26 - 14 AWG (UL)
- 400 V (IEC) / 300 V (UL)
- 23 A (IEC) / 15 A (UL)

General ordering data

Delivery status Available until	Type	Order No.	Version	GTIN (EAN)	Qty.
This article will no longer be available in the future.	SLZF 5.08/11/180B SN OR BX	1710300000	PCB plug-in connector, male plug, 5.08 mm, No. of poles: 11, 180°, Tension clamp connection, Clamping range, rated connection, max.: 3.31 mm ² , Box	4008190319618	50 pc(s).

SL 5.08/180B



Male connectors with straight outlet direction. The solder pin length is optimised for wave flow soldering. The pin headers provide space for labelling and can be coded.

- 400 V (IEC) / 300 V (UL)
- 18 A (IEC) / 15 A (UL)

General ordering data

Delivery status Available until	Type	Order No.	Version	GTIN (EAN)	Qty.
This article will no longer be available in the future.	SL 5.08/11/180B 3.2SN OR BX	1520460000	PCB plug-in connector, male header, Dovetails for fixing blocks, Solder connection, 5.08 mm, No. of poles: 11, Solder pin length (l): 3.2 mm,	4008190023560	50 pc(s).

OMNIMATE Signal - series BL/SL 5.08

BLZ 5.08/11/180 SN OR BX

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Mating connector (conditionally pluggable)

tinned, Orange,
 Box

SLS 5.08/180FI



Male plugs with clamping-yoke screw wire-connect system. The male plugs provide space for labelling and can be coded.

- 0.2 - 2.5 mm² (IEC) / 26 - 12 AWG (UL)
- 400 V (IEC) / 300 V (UL)
- 21.5 A (IEC) / 15 A (UL)

General ordering data

Type	Order No.	Version	GTIN (EAN)	Qty.	Product data	Packaging
SLS	1846300000	PCB plug-in connector,	4032248362585	24 pc(s).	IEC: 400 V / 21.5 A / 0.2 - 2.5 mm ²	Box
5.08/11/180FI		male plug, 5.08 mm, No. of			UL: 300 V / 14 A / AWG 26 - AWG 12	
SN OR BX		poles: 11, 180°, Clamping				
		yoke connection, Clamping				
		range, rated connection,				
		max.: 3.31 mm ² , Box				

SL-SMT 5.08/180LF Box



High-temperature-resistant pin header, packed in box or tape. On tape, with 1.5 mm solder pin, optimised for automatic assembly. 3.2 mm solder pin suitable for reflow and wave soldering. The pin headers provide space for labelling and can be coded. HC = High Current.

General ordering data

Available until	Type	Order No.	Version	GTIN (EAN)	Qty.	Product data
2014-05-20	SL-SMT 5.08/11/180LF 1.5SN BK BX	1776452001	PCB plug-in connector, male header, Solder flange, Reflow solder connection, 5.08 mm, No. of poles: 11, 180°, Solder pin length (l): 1.5 mm, tinned, Black, Box	4032248159338	50 pc(s).	IEC: 400 V / 27.5 A UL: 300 V / 18.5 A
	SL-SMT 5.08HC/11/180LF 3.2SN BK BX	1838530000	PCB plug-in connector, male header, Solder flange, Reflow solder connection, 5.08 mm, No. of poles: 11,	4032248348596	50 pc(s).	IEC: 400 V / 27.5 A UL: 300 V / 18.5 A

Creation date February 17, 2015 11:43:07 PM CET

OMNIMATE Signal - series BL/SL 5.08
BLZ 5.08/11/180 SN OR BX

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Mating connector (conditionally pluggable)

180°, Solder pin length (l):
 3.2 mm, tinned, Black, Box

SLDV-THR 5.08/180F

High-temperature resistant, double level, laterally offset, male connector with flange or solder flange. 1.5 mm solder pin is suitable for reflow soldering. 3.2 mm solder pin suitable for reflow and wave soldering. The pin headers provide space for labelling and can be coded.

- 400 V (IEC) / 300 V (UL)
- 15 A (IEC) / 10 A (UL)

General ordering data

Type	Order No.	Version	GTIN (EAN)	Qty.	Product data	Packaging
SLDV-THR 5.08/22/180F 1.5SN BK BX	1828980000	PCB plug-in connector, male header, Flange, Reflow solder connection, 5.08 mm, No. of poles: 22, 180°, Solder pin length (l): 1.5 mm, tinned, Black, Box	4032248335671	10 pc(s).	IEC: 400 V / 15 A UL: 300 V / 10 A	Box
SLDV-THR 5.08/22/180F 3.2SN BK BX	1828860000	PCB plug-in connector, male header, Flange, Reflow solder connection, 5.08 mm, No. of poles: 22, 180°, Solder pin length (l): 3.2 mm, tinned, Black, Box	4032248335558	10 pc(s).	IEC: 400 V / 15 A UL: 300 V / 10 A	Box

SLZF 5.08/270B

Male plugs with tension-clamp wire connection. The male plugs provide space for labelling and can be coded.

- 0.2 - 2.5 mm² (IEC) / 26 - 14 AWG (UL)
- 400 V (IEC) / 300 V (UL)
- 23 A (IEC) / 15 A (UL)

General ordering data

Available until	Type	Order No.	Version	GTIN (EAN)	Qty.	Product data
2014-06-23	SLZF 5.08/270B SN OR BX	1706230000	PCB plug-in connector, male plug, 5.08 mm, No. of poles: 11, 270°, Tension clamp connection, Clamping range, rated connection,	4032248197712	50 pc(s).	IEC: 400 V / 20.5 A / 0.2 -

OMNIMATE Signal - series BL/SL 5.08 BLZ 5.08/11/180 SN OR BX

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Mating connector (conditionally pluggable)

max.: 3.31 mm²,
Box

2.5
mm²
UL:
300
V /
15
A /
AWG
26
-
AWG
12

SL-SMT 5.08HC/90F Box



High-temperature-resistant pin header, packed in box or tape. On tape, with 1.5 mm solder pin, optimised for automatic assembly. 3.2 mm solder pin suitable for reflow and wave soldering. The pin headers provide space for labelling and can be coded. HC = High Current.

General ordering data

Type	Order No.	Version	GTIN (EAN)	Qty.	Product data	Packaging
SL-SMT	1837720000	PCB plug-in connector, male	4032248347537	50 pc(s).	IEC: 400 V / 27.5 A	Box
5.08HC/11/90F		header, Flange, Reflow			UL: 300 V / 18.5 A	
3.2SN BK BX		solder connection, 5.08 mm, No. of poles: 11, 90°, Solder pin length (l): 3.2 mm, tinned, Black, Box				

OMNIMATE Signal - series BL/SL 5.08 BLZ 5.08/11/180 SN OR BX

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Mating connector (fully pluggable)

SL-SMT 5.08HC/90G Box



High-temperature-resistant pin header, packed in box or tape. On tape, with 1.5 mm solder pin, optimised for automatic assembly. 3.2 mm solder pin suitable for reflow and wave soldering. The pin headers provide space for labelling and can be coded. HC = High Current.

General ordering data

Type	Order No.	Version	GTIN (EAN)	Qty.	Product data	Packaging
SL-SMT	1780270000	PCB plug-in connector, male	4032248165599	50 pc(s).	IEC: 400 V / 27.5 A	Box
5.08HC/11/90G		header, closed side, Reflow			UL: 300 V / 18.5 A	
3.2SN BK BX		solder connection, 5.08 mm, No. of poles: 11, 90°, Solder pin length (l): 3.2 mm, tinned, Black, Box				
2014-05-20	1775092001	PCB plug-in connector, male	4032248156566	50 pc(s).	IEC: 400 V / 27.5 A	Box
SL-SMT 5.08HC/11/90G 1.5SN BK BX		header, closed side, Reflow solder connection, 5.08 mm, No. of poles: 11, 90°, Solder pin length (l): 1.5 mm, tinned, Black, Box			UL: 300 V / 18.5 A	

SLS 5.08/180 SN



Male plugs with clamping-yoke screw wire-connect system. The male plugs provide space for labelling and can be coded.

- 0.2 - 2.5 mm² (IEC) / 26 - 12 AWG (UL)
- 400 V (IEC) / 300 V (UL)
- 21.5 A (IEC) / 15 A (UL)

General ordering data

Type	Order No.	Version	GTIN (EAN)	Qty.	Product data	Packaging
SLS	1627180000	PCB plug-in connector, male plug, 5.08 mm, No. of poles: 11, 180°, Clamping yoke connection, Clamping range, rated connection, max.: 3.31 mm ² , Box	4008190199692	30 pc(s).	IEC: 400 V / 21.5 A / 0.2 - 2.5 mm ²	Box
5.08/11/180 SN OR BX					UL: 300 V / 14 A / AWG 26 - AWG 12	

OMNIMATE Signal - series BL/SL 5.08 BLZ 5.08/11/180 SN OR BX

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Mating connector (fully pluggable)

SL 5.08/90



Male connectors with 90° outlet direction. The solder pin length is optimised for wave flow soldering. The pin headers provide space for labelling and can be coded.

- 400 V (IEC) / 300 V (UL)
- 18 A (IEC) / 15 A (UL)

General ordering data

Delivery status Available until	Type	Order No.	Version	GTIN (EAN)	Qty.
This article will no longer be available in the future.	SL 5.08/11/90 3.2SN OR BX	1508960000	PCB plug-in connector, male header, open side, Solder connection, 5.08 mm, No. of poles: 11, 90°, Solder pin length (l): 3.2 mm, tinned, Orange, Box	4008190143459	50 pc(s).

SL-SMT 5.08/180G Box



High-temperature-resistant pin header, packed in box or tape. On tape, with 1.5 mm solder pin, optimised for automatic assembly. 3.2 mm solder pin suitable for reflow and wave soldering. The pin headers provide space for labelling and can be coded. HC = High Current.

General ordering data

Available until	Type	Order No.	Version	GTIN (EAN)	Qty.	Product data
2014-05-20	SL-SMT 5.08/11/180G 1.5SN BK BX	1776012001	PCB plug-in connector, male header, closed side, Reflow solder connection, 5.08 mm, No. of poles: 11, 180°, Solder pin length (l): 1.5 mm, tinned, Black, Box	4032248159000	50 pc(s).	IEC: 400 V / 27.5 A UL: 300 V / 18.5 A
SL-SMT 5.08HC/11/180G 3.2SN BK BX	1838300000	PCB plug-in connector, male header, closed side, Reflow solder connection, 5.08	4032248348367	50 pc(s).	IEC: 400 V / 27.5 A UL: 300 V / 18.5 A	Box

OMNIMATE Signal - series BL/SL 5.08 BLZ 5.08/11/180 SN OR BX

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Mating connector (fully pluggable)

mm, No. of poles: 11, 180°,
Solder pin length (l): 3.2
mm, tinned, Black, Box

SLD 5.08/180G



2-tier male header with parallel pin arrangement. The solder pin length is optimised for wave flow soldering. The pin headers provide space for labelling and can be coded.

- 400 V (IEC) / 300 V (UL)
- 11 A (IEC) / 10 A (UL)

General ordering data

Type	Order No.	Version	GTIN (EAN)	Qty.	Product data	Packaging
SLD	1602480000	PCB plug-in connector, male header, closed side, Solder connection, 5.08 mm, No. of poles: 22, 180°, Solder pin length (l): 3.2 mm, tinned, Orange, Box	4008190045180	10 pc(s).	IEC: 400 V / 11 A UL: 300 V / 10 A	Box
5.08/22/180G						
3.2SN OR BX						

SLZF 5.08/180



Male plugs with tension-clamp wire connection. The male plugs provide space for labelling and can be coded.

- 0.2 - 2.5 mm² (IEC) / 26 - 14 AWG (UL)
- 400 V (IEC) / 300 V (UL)
- 23 A (IEC) / 15 A (UL)

General ordering data

Delivery status Available until	Type	Order No.	Version	GTIN (EAN)	Qty.
This article will no longer be available in the future.	SLZF 5.08/11/180 SN OR BX	1709460000	PCB plug-in connector, male plug, 5.08 mm, No. of poles: 11, 180°, Tension clamp connection, Clamping range, rated connection, max.: 3.31 mm ² , Box	4008190950286	50 pc(s).

OMNIMATE Signal - series BL/SL 5.08 BLZ 5.08/11/180 SN OR BX

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Mating connector (fully pluggable)

SL-SMT 5.08HC/90 Box



High-temperature-resistant, 90° angled, open male header. Packed in box or tape. On tape, with 1.5 mm solder pin, optimised for automatic assembly. 3.2 mm solder pin suitable for reflow and wave soldering. The pin headers provide space for labelling and can be coded. HC = High Current.

General ordering data

Type	Order No.	Version	GTIN (EAN)	Qty.	Product data	Packaging
SL-SMT 5.08HC/11/90 3.2SN BK BX	1780040000	PCB plug-in connector, male header, open side, Reflow solder connection, 5.08 mm, No. of poles: 11, 90°, Solder pin length (l): 3.2 mm, tinned, Black, Box	4032248165360	50 pc(s).	IEC: 400 V / 27.5 A UL: 300 V / 18.5 A	Box
2014-05-20 to 2016-05-01	SL-SMT 5.08HC/11/90 1.5SN BK BX	1774852001	PCB plug-in connector, male header, open side, Reflow solder connection, 5.08 mm, No. of poles: 11, 90°, Solder pin length (l): 1.5 mm, tinned, Black, Box	4032248155897	50 pc(s).	IEC: 400 V / 27.5 A UL: 300 V / 18.5 A

SL-SMT 5.08/180 Box



High-temperature-resistant, straight, open pin header. Packed in box or tape. On tape and with 1.5 mm solder pin, optimised for automatic assembly. 3.2 mm solder pin suitable for reflow and wave soldering. The pin headers provide space for labelling and can be coded. HC = High Current.

General ordering data

Available until	Type	Order No.	Version	GTIN (EAN)	Qty.	Product data
2014-05-20 to 2016-05-01	SL-SMT 5.08/180 1.5SN BK BX	1775692001	PCB plug-in connector, male header, open side, Reflow solder connection, 5.08 mm, No. of poles: 11, 180°, Solder	4032248158331	50 pc(s).	IEC: 400 V / 27.5 A UL: 300


OMNIMATE Signal - series BL/SL 5.08 BLZ 5.08/11/180 SN OR BX

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Mating connector (fully pluggable)

		pin length (l): 1.5 mm, tinned, Black, Box	V / 18.5 A
SL-SMT	1838070000	PCB plug-in connector, male	4032248348138 50 pc(s).
5.08HC/11/180		header, open side, Reflow	IEC: 400 V / 27.5 A
3.2SN BK BX		solder connection, 5.08 mm, No. of poles: 11, 180°, Solder pin length (l): 3.2 mm, tinned, Black, Box	UL: 300 V / 18.5 A

SLDF 5.08



Male connector for through-panel mounting with optional locking function. Internal connection as flat-blade or solder connection. These male connectors provide space for labelling and can be coded.

- 400 V (IEC) / 300 V (UL)
- 15 A (IEC) / 10 A (UL)

General ordering data

Type	Order No.	Version	GTIN (EAN)	Qty.	Product data	Packaging
SLDF 5.08 L/F	1599220000	PCB plug-in connector,	4008190164089	50 pc(s).	IEC: 400 V / 15 A	Box
11 SN OR BX		male header, 5.08 mm, No. of poles: 11, 180°, Flat- blade connection, Solder connection, Box			UL: 300 V / 10 A	

SLD 5.08/90G



2-tier male header with parallel pin arrangement. The solder pin length is optimised for wave flow soldering. The pin headers provide space for labelling and can be coded.

- 400 V (IEC) / 300 V (UL)
- 11 A (IEC) / 10 A (UL)

General ordering data

Type	Order No.	Version	GTIN (EAN)	Qty.	Product data	Packaging
SLD	1601880000	PCB plug-in connector, male	4008190085001	10 pc(s).	IEC: 400 V / 11 A	Box
5.08/22/90G		header, closed side, Solder			UL: 300 V / 10 A	
3.2SN OR BX		connection, 5.08 mm, No. of poles: 22, 90°, Solder pin length (l): 3.2 mm, tinned, Orange, Box				

OMNIMATE Signal - series BL/SL 5.08 BLZ 5.08/11/180 SN OR BX

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Mating connector (fully pluggable)

SL 5.00/90



Male connectors with 90° outlet direction. The solder pin length is optimised for wave flow soldering. The pin headers provide space for labelling and can be coded.

- 400 V (IEC) / 300 V (UL)
- 18 A (IEC) / 15 A (UL)

General ordering data

Type	Order No.	Version	GTIN (EAN)	Qty.	Product data	Packaging
SL	1571220000	PCB plug-in connector, male	4008190015787	50 pc(s).	IEC: 400 V / 18 A	Box
5.00/11/90		header, open side, Solder connection, 5.00 mm, No. of poles: 11, 90°, Solder pin length (l): 3.2 mm, tinned, Orange, Box			UL: 300 V / 15 A	
3.2SN OR BX						
SL	1626070000	PCB plug-in connector, male	4008190197377	50 pc(s).	IEC: 400 V / 18 A	Box
5.00/11/90		header, open side, Solder connection, 5.00 mm, No. of poles: 11, 90°, Solder pin length (l): 4.5 mm, tinned, Black, Box			UL: 300 V / 15 A	
4.5SN BK BX						

SL 5.08/135



Male connectors with 135° outlet direction. The solder pin length is optimised for wave flow soldering. The pin headers provide space for labelling and can be coded.

- 400 V (IEC) / 300 V (UL)
- 17 A (IEC) / 15 A (UL)

General ordering data

Type	Order No.	Version	GTIN (EAN)	Qty.	Product data	Packaging
SL	1603150000	PCB plug-in connector, male header, open side, Solder connection, 5.08 mm, No. of poles: 11, 135°, Solder pin length (l): 3.2 mm, tinned, Orange, Box	4008190011673	50 pc(s).	IEC: 400 V / 17 A	Box
5.08/11/135					UL: 300 V / 15 A	
3.2SN OR BX						

OMNIMATE Signal - series BL/SL 5.08 BLZ 5.08/11/180 SN OR BX

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Mating connector (fully pluggable)

SL 5.08/180



Male connectors with straight outlet direction. The solder pin length is optimised for wave flow soldering. The pin headers provide space for labelling and can be coded.

- 400 V (IEC) / 300 V (UL)
- 18 A (IEC) / 15 A (UL)

General ordering data

Delivery status Available until	Type	Order No.	Version	GTIN (EAN)	Qty.
This article will no longer be available in the future.	SL 5.08/11/180 3.2SN OR BX	1518160000	PCB plug-in connector, male header, open side, Solder connection, 5.08 mm, No. of poles: 11, 180°, Solder pin length (l): 3.2 mm, tinned, Orange, Box	4008190115449	50 pc(s).

Adressen weltweit

Let's connect.

AE	Vereinigte Arabische Emirate Weidmüller Middle East FZE Warehouse Q3-79 SAIF-Zone P.O. BOX 8591 Sharjah Telefonnummer +971 65572723 Faxnummer +971 65572724 wme.info@weidmuller.com	BH	Bahrain Khayber Trading Company P.O Box 1976 Manama Telefonnummer +973 720747 Faxnummer +973 720331 khayber@batelco.com.bh	CO	Kolumbien Automatización Avanzada S. A. Carrera 97 No., 24 c - 23 Bodega 4 110911 Bogotá-D.C. Telefonnummer +57 (1) 547-8510 Faxnummer +57 (1) 422-3044 comercial@automatizacionavanzada.com www.automatizacionavanzada.com	FI	Finnland Weidmüller Suomi, Weidmüller Aktiebolagetin siivliike Koy Plaza Vivace Äyritie 8C FI 1510 Vantaa Telefonnummer +358 20 7351300 Faxnummer +358 800 114 667 asiakaspalvelu@weidmuller.fi www.weidmuller.fi	ID	Indonesien PT. Nego Electrindo Ruko Mega Grosir Cempaka Mas Blok 1 No. 20 - 22 Jakarta 10640 Telefonnummer +62 21 42882255 Faxnummer +62 21 42882266 sales@negoelectrindo.co.id
AO	Angola Bitte kontaktieren Sie Phambili Interface Südafrika	BR	Brasilien Weidmüller Conexel do Brasil Conexões Elétricas Ltda. Av. Presidente Juscelino, 642 - Piraporinha Diadema, São Paulo 09950-370 Telefonnummer +55 (11) 4366-9600 Faxnummer +55 (11) 4362-1677 vendas@weidmuller.com.br www.weidmuller.com.br	CR	Costa Rica S. A. ELVATRON S. A. la Uruca 400 Norte Banco Costa Rica San Jose Costa Rica Telefonnummer +506 2961-060 Faxnummer +506 5200-609 dirk.haase@elvatron.com www.elvatron.com	FR	Frankreich Weidmüller E. U. R. L. 12, Chaussée Jules César BP 263 Osnay 95523 Cergy-Pontoise Cedex Telefonnummer +33 1 34 24 55 00 Faxnummer +33 1 34 24 55 01 mail@weidmuller.fr	IE	Irland Bitte kontaktieren Sie Weidmüller Ltd. Großbritannien
AR	Argentinien CPI SA Bauness 2660 C1431DOF Buenos Aires Telefonnummer +54 11 4523 8008 Faxnummer +54 11 4522 0546 info@cpi.com.ar www.cpi.com.ar	BW	Botswana Bitte kontaktieren Sie Phambili Interface Südafrika	CZ	Tschechische Republik Weidmüller s.r.o. Lomnického 5/1705 140 00 Praha 4 Telefonnummer +420 244 001 400 Faxnummer +420 244 001 499 office@weidmuller.cz www.weidmuller.cz	GB	Großbritannien Weidmüller Ltd. Klippon House Centurion Court Office Park, Meridian East, Meridian Business Park Leicester LE19 1TP Telefonnummer +44 116 282 3470 Faxnummer +44 116 289 3582 marketing@weidmuller.co.uk www.weidmuller.co.uk	IL	Israel A. U. Shay Ltd. 23/25, Embar Street 49222 Petach-Tikva P.O. Box 1 00 49 49222 Petach-Tikva Telefonnummer +972 3-923-3601 Faxnummer +972 3-923-4601 shay@uriel-shay.com www.uriel-shay.com
AT	Österreich Weidmüller GmbH IZ NOE Süd Straße 2b, Obj M 59 2355 Wiener Neudorf Telefonnummer +43 2236 67080 Faxnummer +43 2236 6708-899 office.at@weidmuller.com www.weidmuller.com	BY	Weißrussland TECHNIKON Ltd. Nezavisimosti pr. 177-9 220125 Minsk Telefonnummer +375 17 393-11-77 Faxnummer +375 17 3930080 wm@technikon.by	DE	Deutschland Weidmüller GmbH & Co. KG Ohmstraße 9 32758 Detmold Postfach 30 54 32720 Detmold Telefonnummer +49 5231 1428-0 Faxnummer +49 5231 14-292083 weidmuller@weidmuller.de www.weidmuller.de	GE	Georgien Bitte kontaktieren Sie unser Representative Office Rashad Mahmudov Aserbaidshan.	IN	Indien Repräsentanz Büro Weidmüller Electronics India Pvt. Ltd. 12th Lane North Avenue, Opp Joggers Park, Kalyani Nagar, Pune 411 006 Telefonnummer +91 20-41290090 wmi.pune@weidmuller.in www.weidmuller.com
AU	Australien Weidmüller Pty. Ltd. PO BOX 6944 Huntingwood 2148 Huntingwood Drive 43 Huntingwood NSW 2148 Telefonnummer +61 2 9671 9999 Faxnummer +61 2 9671 9911 info@weidmuller.com.au www.weidmuller.com.au	CA	Kanada W Interconnections Canada Inc. 10 Spy Court Markham Ontario L3R 5H6 Telefonnummer +1 (905) 475-1507 Ext. 9836 Faxnummer +1 (905) 475-2798 support@weidmuller.ca www.weidmuller.ca	DK	Dänemark Weidmüller Danmark Vallensbækvej 18A 2605 Brøndby Telefonnummer +45 27747800 kundeservice@weidmuller.dk www.weidmuller.dk	GR	Griechenland G.A. Solutions Ippokratous 11 Metamorfosi 144 52 Athen Telefonnummer +30 210 2823233 Faxnummer +30 210 2823233 info@weidmuller.gr www.weidmuller.gr	IS	Island Samey Automation Center Lyngas 13 210 Garabær Telefonnummer +354 510 5200 Faxnummer +354 510 5201 Samey@samey.is www.samey.is
AZ	Aserbaidshan Repräsentanz Büro Rashad Mahmudov Demirchi Tower, 4th floor 37, Khojali ave. AZ 1025 Baku Telefonnummer +994 12 488 80 36 Faxnummer +994 12 488 80 37 rashad.mahmudov@weidmuller.com	CG	Kongo Bitte kontaktieren Sie Phambili Interface Südafrika	EC	Ecuador Elsystec S. A., Electricidad Sistemas y Tecnología Vasco de Contreras N35-251 y Mañosa Quito - Pichincha Telefonnummer +593 22456510 Faxnummer +593 22456755 Elsystec@uiio.satnet.net	GT	Guatemala Prestelectro, Prestegard Electro, S.A. Avenida Petapa 44-22, Zona 12 Guatemala City Telefonnummer +502 2442-3346 Faxnummer +502 2476-8945 ventas@prestelectro.com	IT	Italien Weidmüller S. r.l. Via Albert Einstein 4 20092 Cinisello Balsamo Milano Telefonnummer +39 02 660681 Faxnummer +39 02 6124945 weidmuller@weidmuller.it www.weidmuller.it
BA	Bosnien und Herzegowina Bitte kontaktieren Sie unser Representative Office Weidmüller Interface GmbH & Co. KG Serbien oder BIG electric d.o.o Mladena Stojanovića 117A 78000 Banja Luka Telefonnummer +387 51926277 Faxnummer +387 51926277 bigelectric@blic.net www.bigelectric.ba	CH	Schweiz Weidmüller Schweiz AG Rundbuckstraße 2 8212 Neuhausen am Rheinfall SH Telefonnummer +41 52 674 07 07 Faxnummer +41 52 674 07 08 info@weidmuller.ch www.weidmuller.ch	EE	Estland Bitte kontaktieren Sie unser Representative Office Weidmüller Interface GmbH & Co. KG Lettland oder Soots Interface OÜ Pärnu mnt 142 11317 Tallinn Telefonnummer +372 609 6933 Faxnummer info@sootsinterface.ee www.sootsinterface.ee	HK	Hong Kong Weidmüller (Hong Kong) Limited Co. Ltd. Unit 1617, Metropolis Tower No. 10 Metropolis Drive, Hunghom, Kowloon Telefonnummer +852 3154 8088 Faxnummer +852 31548099 Info-hk@weidmuller.com.hk	JM	Jamaika Bitte kontaktieren Sie W Interconnections Inc. USA
BE	Belgien Weidmüller Benelux B. V. Mechelsesteenweg 519 bus 6 en 7 1930 Nossegem Telefonnummer +32 2 752 40 70 Faxnummer +32 2 751 36 06 info@weidmuller.be www.weidmuller.be	CL	Chile ATS- INTECH Maria Luisa Santander 0475 Santiago Providencia 7500859 Telefonnummer +56 2 341 1271 Faxnummer +56 2 341 1275 felipe@atsintech.com www.atsintech.com CPI CHILE LTDA Av. Presidente Frei Montalva 6001, 47 complejo el cortijo Santiago - Conchalí Telefonnummer +562 963 8440 Faxnummer +562 963 8440 cpi@cpichile.cl www.cpichile.cl	EG	Ägypten Standard Electric (OMEGA) 87, Mohamed Farid Street Heliopolis Cairo Telefonnummer +202 26229000 Faxnummer +202 26221555 stdelec@rite.com	HR	Kroatien ElektroPARTNER d.o.o. Slavonska avenija 24/6 HR-10000 Zagreb Telefonnummer +385 (1) 6184 793 Faxnummer +385 (1) 6184 795 elektropartner@zg.t-com.hr www.elektropartner.hr	JO	Jordanien Trans Jordan for Electro PO Box 33 06 07 Amman Telefonnummer +962 6 533 2020 Faxnummer +962 6 533 5800 transjordan@batelco.jo
BG	Bulgarien Weid-Bul EOOD Bul. "Kliment Ohridski" 13 1756 Sofia Telefonnummer +359 2 963 2560 Faxnummer +359 2 963 1098 sofia@weidbul.com www.weidbul.com	CN	China Weidmüller Interface (Shanghai) Co. Ltd. 100 Yutong Road 25 F. BM Intercontinental Business Center 200070 Shanghai Telefonnummer +86 21-22195008 Faxnummer +86 512-68417505 customer.hotline@weidmuller.com.cn www.cnweidmuller.com	ES	Spanien Weidmüller, S. A. Narcis Monturiol 11-13, Pol. Ind. Sudoste 8960 Sant Just Desvern - Barcelona Telefonnummer +34 934 803 386 Faxnummer +34 933 718 055 weidmuller@weidmuller.es www.weidmuller.es	HU	Ungarn Weidmüller Kereskedelmi Kft. Budapest Gibacs út 6. 1097 Telefonnummer +36 1 382 7700 Faxnummer +36 1 382 7701 info@weidmuller.hu www.weidmuller.hu	JP	Japan Nihon Weidmüller Co. Ltd. Sphere Tower Tennoz 2-2-8 Higashi-Shinagawa, Shinagawa-ku Tokyo 140-0002 Telefonnummer +81 3 6711 5300 Faxnummer +81 3 6711 5333 weidmullerjapan@weidmuller.co.jp www.weidmuller.co.jp



Let's connect.

Alle Weidmüller Adressen sowie Ihren lokalen Ansprechpartner finden Sie im Internet unter: www.weidmueller.com/countries

Vertriebsgesellschaft

Auslandsvertretung

ohne Auslandsvertretung

KE Kenia Bitte kontaktieren Sie Phambili Interface Südafrika	MG Madagaskar Bitte kontaktieren Sie Phambili Interface Südafrika	NO Norwegen Sivilingenier J.F. Knudtzen AS Billingstadsletta 97 1396 Billingstad PO Box 160 1378 Nesbru Telefonnummer +47 66 98 33 50 Faxnummer +47 66 98 09 55 firmapost@jfkudtzen.no www.jfkudtzen.no	PT Portugal Weidmüller Sistemas de Interface S. A. Estrada Outeiro Polima, R. Augusto Dias da Silva, Lote B - Esct. 2 São Domingos de Rana 2785-515 Abóboda Telefonnummer +351 214 459 191 Faxnummer +351 214 455 871 weidmuller@weidmuller.pt www.weidmuller.pt	SE Schweden Weidmüller AB Axel Danielssons väg 271 BOX 31025 SE-200 49 Malmö Telefonnummer +46 77-143 00 44 Faxnummer +46 40-37 48 60 info@weidmuller.se www.weidmuller.se
KR Korea Weidmüller Korea Co. Ltd. 9th floor, Wonbang B/D Samseong 2-Dong, Gangnam- Gu Seoul 143-42 Telefonnummer +82 2-516- 0003 Faxnummer +82 2-516-0090 info@weidmuller.co.kr www.weidmuller.co.kr	MK Mazedonien Bitte kontaktieren Sie unser Representative Office Weidmüller Interface GmbH & Co. KG Serbien oder ELEKTRO - SMK dool UL. III Makedonska brigada b.b. 1000 Skopje Telefonnummer +389 22460295 Faxnummer Elektro-smk@telekabel.net.mk	NZ Neuseeland Cuthbert S. Steward Ltd. 27 Te Puni Street Petone PO Box 38496 Wellington Mail Centre 5054 Telefonnummer (04) 568 6156 Faxnummer (09) 489 1752 csl@cuthbertsteward.co.nz Cuthbert S. Steward Ltd 4 Fred Thomas Drive Aon Building, Ground Floor, South Entry Takapuna PO Box 100 338 North Shore City 745 Telefonnummer (09) 489 1751 Faxnummer (04) 568 6056 cslak@cuthbertsteward.co.nz	PY Paraguay Bitte kontaktieren Sie CPI SA Argentinien	SG Singapur Weidmüller Pte. Ltd. 70 Bendemeer Road # 04-03 Luzerne Building Singapore 339940 Telefonnummer +65 6841 5311 Faxnummer +65 6841 5377 info@weidmuller.com.sg www.weidmuller.com.sg
KW Kuwait Kana Controls General Trading & Contracting Co. W. L. L. Al Rai Industrial Area, Plot 28-30, St. 31 13016 Safat B.P. 25593 Telefonnummer +965 4741373 Faxnummer +965 4741537 info@kanacontrols.com	MT Malta E. S. S., Electrical Supplies & Services Ltd. San Gwakkin Road Mrieħel Telefonnummer +356 21255777 Faxnummer +356 21255999 robert.agius@ess.com.mt	OM Oman DAN INTERNATIONAL LLC. Ghala St. 111 BP 2901 Seeb Telefonnummer +968 5036 77 Faxnummer +968 5037 55 yedu@danintl.com	QA Katar Petroleum Technology Co. W.L.L. PO Box 16069 5th Floor Toyota tower Telefonnummer +974 444 19603 Faxnummer +974 444 19604 petrotec@qatar.net.qa www.petrotec.com.qa	SI Slowenien Elektrospoji d. o. o. Stegne 27 SI- 1000 Ljubljana Osrednješlovenska Telefonnummer +386 1 511 3810 Faxnummer +386 1 511 1604 info@elektrospoji.si www.elektrospoji.si
KZ Kasachstan Bitte kontaktieren Sie OOO Weidmüller Russland	MU Mauritius Mubelo Electrical Ltd. Office 26, Gateway building, St Jean Road Quatre Bornes Mauritius Telefonnummer +230 4670989 Faxnummer +230 4654051 richard.mubelo@orange.mu	PE Peru IMPEXINCA S.A.C. Calle Ortiz de Zevallos No. 105, Urb. San Antonio 18 Lima, Miraflores Telefonnummer +51 1 447 5608 info@impexinca.pe www.impexinca.pe J & W CIA. S. A. Calle 6 Mz. D Lte. 23, Urb. Ind. Grimanesa 01 Callao Telefonnummer +51 1 572 2539 Faxnummer +51 1 572 0152 contacto@jwcia.com www.jwcia.com	RO Rumänien Repräsentanz Büro Weidmüller Interface GmbH & Co. KG Ionescu Crum Street, No. 1, 1st Tower, 1st Floor, Office 4 500446 Brasov - Brasov Business Park Telefonnummer +40 (268) 446 222 Faxnummer +40 (262) 205 410 claudiu.totea@weidmueller. com www.weidmueller.com	SK Slowakei ELEKTRIS s.r.o. Elektrárenská 1 831 04 Bratislava Telefonnummer +421 2/4920 0113 Faxnummer +421 2/4920 0119 bratislava@elektris.sk
LB Libanon Progress Engineering & Trading Enterprises Al Nahr Street Beirut 11-1111 Telefonnummer +961 1 444 664 Faxnummer +961 1 561 880 progress@inco.com.lb	MW Malawi Bitte kontaktieren Sie Phambili Interface Südafrika	PH Philippinen Enclosure Systems Specialists Inc. 2276 Don Chino Roces Avenue Extension Room 103/105 Narra Building 1231 Makati City Telefonnummer +63 2 813 8580 Faxnummer +63 2 813 8596 sales_encsys@pltdsl.net www.enclosuresystemsph. com	RS Serbien Repräsentanz Büro Weidmüller Interface GmbH & Co. KG Ustanička 189, III sprat Iokal 7a 11050 Beograd Telefonnummer +381 112885274 Faxnummer +381 112885274 zoran.rabrenovic@ weidmueller.com TeLa Elektrik d.o.o. Ul.Dr Drage Ljočić 6 Beograd Telefonnummer +381 11 2772 415 Faxnummer +381 11 2772 850 office@tela.rs www.tela.rs	SV El Salvador Prestegard Electro 11 Avenida Norte No. 240 Edificio Salazar No. 2 San Salvador Telefonnummer +503 2271 1690 Faxnummer +503 2221 3851 prestegard@navegante.com.sv
LT Litauen Bitte kontaktieren Sie unser Representative Office Weidmüller Interface GmbH & Co. KG Lettland oder ELEKTROS IRANGA Tinklų g. 29 a LT-5319 Panevezys Telefonnummer +370 (45) 582 828 Faxnummer info@eliranga.lt	MX Mexiko W Interconnections S. A. DE C. V. Blvd. Hermanos Serdán 698, Col. San Rafael Oriente 72029 Puebla Telefonnummer +52 (222) 268 6227 Faxnummer +52 (222) 286 6242 clientes@weidmuller.com.mx	PK Pakistan Automation Controls (Pak) Apartment No. 33 C III, Chenab Block, Allama Iqbal Town Lahore Telefonnummer +92 42 37809948 Faxnummer +92 42 37809950 nadeem@acpak.com.pk www.acpak.com.pk	RU Russland OOO Weidmüller Warschavskoye highway, 25 A, bld. 6 Moskau 117105 Telefonnummer +7 (495) 771-69-40 Faxnummer +7 (495) 771- 69-41 Info@weidmueller.ru www.weidmueller.ru	SY Syrien Bitte kontaktieren Sie Weidmüller Middle East FZE Vereinigte Arabische Emirate
LU Luxemburg Bitte kontaktieren Sie Weidmüller Benelux B. V. Niederlande	MY Malaysia Connect Plus Technology Sdn Bhd No. 43, Jalan PJS 11/22, Bandar Sunway 46150 Petaling Jaya Selangor Darul Ehsan Telefonnummer +60 3 5633 7363 Faxnummer +60 3 5633 6562 paul@cptech.com.my www.cptech.com.my	PL Polen Weidmüller Sp. z o. o. ul. Ogrodowa 58 00-876 Warszawa Telefonnummer +48 22 510 09 40 Faxnummer +48 22 510 09 41 biuro@weidmuller.com.pl www.weidmuller.pl	SA Saudi-Arabien Al Abdulkarim Holding Co. P.O. Box 4 Dammam 31411 Telefonnummer +966 3 8337110 Faxnummer +966 3 8829547 E-Mail salehsk@akh.com.sa www.weidmueller.ae Saudi Electric Supply Company (SESCO) P.O. Box 32 98 Al Khobar 31952 Telefonnummer +966 3 8829546 Ext. 3030 Faxnummer E-Mail Safdar.Malik@sesco- gex.com www.sesco-gex.com	SZ Swasiland Bitte kontaktieren Sie Phambili Interface Südafrika
LV Lettland SIA Abi4 Daugavgrivas 31b Riga, LV-1007 Telefonnummer +371 674 70999 Faxnummer +371 676 24562 abi_4@tvnet.lv Repräsentanz Büro Weidmüller Interface GmbH & Co. KG Udens str. 12-118 Riga, LV-1007 Telefonnummer +371 29254766 Faxnummer +371 674 65637 lgonis.rudaks@weidmueller. com www.weidmueller.com	MZ Mosambik Bitte kontaktieren Sie Phambili Interface Südafrika	PR Puerto Rico Bitte kontaktieren Sie W Interconnections Inc. USA	TH Thailand Pisanu Engineering Co. Ltd. Kwang Dingaeng, Khet Dingdaeng 800/2 Soi Trakulsuk, Asoke- dindaeng Road Dingdaeng, Bangkok 10400 Telefonnummer +66 2 248 2896 Faxnummer +662 105 6301 ecsales@pisanu.co.th www.pisanu.co.th Repräsentanz Büro Weidmüller Pte. Ltd. 37/F, Sathorn Square Building 98 North Sathorn Road Bangkok, Silom Bangrak 10500 Telefonnummer +66 2 105 6300 Faxnummer +66 2 642 9220 info@weidmuller.com.sg	SV El Salvador Prestegard Electro 11 Avenida Norte No. 240 Edificio Salazar No. 2 San Salvador Telefonnummer +503 2271 1690 Faxnummer +503 2221 3851 prestegard@navegante.com.sv
MD Moldawien BERHORD A & D srl 79/1, str. Milescu Spartaru MD-2075 Chisinau Moldova Telefonnummer +373 (22) 815002 Faxnummer +373 (22) 815007 atiuleanu@berhord.com www.ad.berhord.com	NA Namibia Bitte kontaktieren Sie Phambili Interface Südafrika	TR Türkei Weidmüller Elektronik Ticaret Ltd. Sirketi Kavacak Mah. Orhan Veli Kanik Caddesi 9/1 34810 Beykoz / Istanbul Telefonnummer +90 (216) 537 10 70 Faxnummer +90 (216) 537 10 77 info@weidmuller.com.tr www.weidmuller.com.tr	RU Russland OOO Weidmüller Warschavskoye highway, 25 A, bld. 6 Moskau 117105 Telefonnummer +7 (495) 771-69-40 Faxnummer +7 (495) 771- 69-41 Info@weidmueller.ru www.weidmueller.ru	SK Slowakei ELEKTRIS s.r.o. Elektrárenská 1 831 04 Bratislava Telefonnummer +421 2/4920 0113 Faxnummer +421 2/4920 0119 bratislava@elektris.sk
ME Montenegro Bitte kontaktieren Sie unser Representative Office Weidmüller Interface GmbH & Co. KG Serbien.	NG Nigeria Bitte kontaktieren Sie	PT Portugal Weidmüller Sistemas de Interface S. A. Estrada Outeiro Polima, R. Augusto Dias da Silva, Lote B - Esct. 2 São Domingos de Rana 2785-515 Abóboda Telefonnummer +351 214 459 191 Faxnummer +351 214 455 871 weidmuller@weidmuller.pt www.weidmuller.pt	QA Katar Petroleum Technology Co. W.L.L. PO Box 16069 5th Floor Toyota tower Telefonnummer +974 444 19603 Faxnummer +974 444 19604 petrotec@qatar.net.qa www.petrotec.com.qa	SE Schweden Weidmüller AB Axel Danielssons väg 271 BOX 31025 SE-200 49 Malmö Telefonnummer +46 77-143 00 44 Faxnummer +46 40-37 48 60 info@weidmuller.se www.weidmuller.se

Adressen weltweit

Let's connect.

TW**Taiwan**

Weidmüller (Hong Kong)
Limited
No. 3, Lane 89, ChaungYang
N. Rd.
24148 SanChuang City,
Taipei
Telefonnummer +886 921
949 751
roy.lin@weidmueller.com.hk

TZ**Tansania**

Bitte kontaktieren Sie
Phambili Interface
Südafrika

UA**Ukraine**

LLC WM UKRAINE
Levanevskogo str. 6
Kiev
3058
Telefonnummer +38 044
490 32 48
Faxnummer
info@wm-ua.com.ua
wm-ua.com.ua/

Repräsentanz Büro
Weidmüller Interface GmbH
& Co. KG
Z. office 303
7-D, Zdolbunivska str.
Kiev, 2081
Telefonnummer (Mobil) +38
050 440 25 24
info.ua@weidmueller.com

US**USA**

W Interconnections Inc.
821 Southlake Boulevard
Richmond Virginia 23236
Telefonnummer +1 (804)
794-2877
Faxnummer +1 (804) 379-
2593
info@weidmuller.com
www.weidmuller.com

UY**Uruguay**

REWO Uruguay S. A.
AV. Bolivia 2001 Esq
Rocafuerte
11300 Carrasco Montevideo
Telefonnummer +598 2604
8439
Faxnummer +598 2604
8439
rewo@rewouruguay.com.uy

UZ**Usbekistan**

Bitte kontaktieren Sie
OOO Weidmüller
Russland

VE**Venezuela**

Somerinca C. A.
Corazon de Jesus - 3ra
Transversal con calle el
Carmen- Los Dos Caminos
Caracas 1070-A
Telefonnummer +58
2122352748
Faxnummer +58
2122399341
klocmoeller@cantv.net
www.somerinca.com

VN**Vietnam**

AUMI Industrial Equipment &
Automation Company Limited
E1, La Thanh Hotel
218 Doi Can Street
Lieu Giai Ward, Ba Dinh
District
Hanoi City
Telefonnummer +84 4
37628601
Faxnummer +84 4
62661391
aumi@aumi.com.vn
www.aumi.com.vn

Repräsentanz Büro
Weidmüller Pte. Ltd.
Level 16 Saigon Tower
Building
29 Le Duan Street
District 1
Ho Chi Minh
Telefonnummer +848 3520
7717
Faxnummer +848 3520
7604
info@weidmuller.com.sg

ZA**Südafrika**

Phambili Interface
PO Box 193
1609 Johannesburg, Edenvale
5 Bundo Road, Sebenza
1610 Johannesburg
Telefonnummer +27 (11)
4521930
Faxnummer
info@weidmuller.co.za
www.weidmuller.co.za

ZM**Sambia**

Bitte kontaktieren Sie
Phambili Interface
Südafrika

ZW**Simbabwe**

Bitte kontaktieren Sie
Phambili Interface
Südafrika