


Number of contacts

64

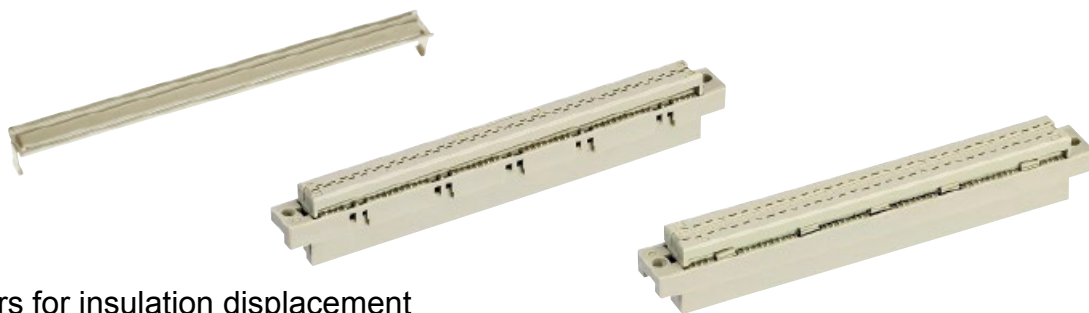

Female connectors for insulation displacement

Identification	No. of contacts	Part number	Drawing	Dimensions in mm									
Female connector for insulation displacement													
Type B	64	performance level 2 09 02 264 6828 performance level 3 09 02 264 7828	Lead number 1 of flat cable on contact 1 b Contact arrangement View from termination side										
Type C	64	performance level 2 09 03 264 6828 09 03 764 6828 ^{c)} performance level 3 09 03 264 7828	Lead number 1 of flat cable on contact 1 c Contact arrangement View from termination side										
Strain relief for types B and C		09 03 000 9940	Mateable with 3-row male connector Type C. No female contact in middle row. Panel cut out <table><tr><td></td><td>a</td><td>b</td></tr><tr><td>Type B</td><td>8.3</td><td>10.16</td></tr><tr><td>Type C</td><td>10.8</td><td>12.7</td></tr></table>		a	b	Type B	8.3	10.16	Type C	10.8	12.7	
	a	b											
Type B	8.3	10.16											
Type C	10.8	12.7											

Male connectors see DIN 41612 catalogue

^{c)} Connectors with coding