

4

3

2



1

D

D



C

C

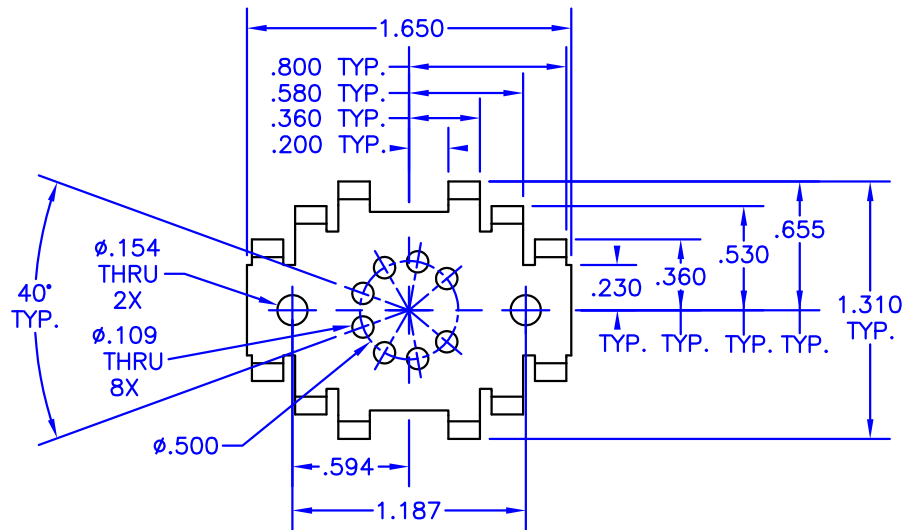

B

B

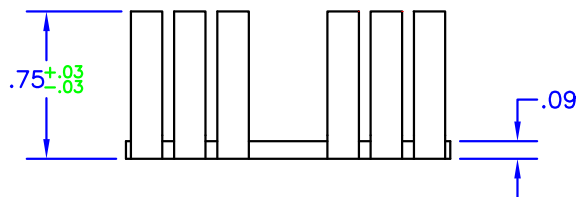**NOTES:**

1. Unless otherwise noted, all dimensions are in inches.
2. Break all sharp edges, de-burr & remove loose chips.
3. Material: Aluminum alloy.
4. Finish: Anodize per MIL-A-8625, Type II, Class 2, Black
Typical breakdown voltage > 300V.
5. Mark with contrasting ink as shown, if specified by P.O.
6. Approximate Weight: 0.4 oz [11g].
7. Vendor: Aavid Thermalloy Extrusion 329241.
8. Thermal rating: 11.7 °C/W

A

A

TOLERANCES - UNLESS
OTHERWISE SPECIFIED

.XX = ±.01 [.254]
.XXX = ±.005 [.127]
ANG. = ±5°



TITLE:

HEATSINK, T03

MODEL:

HS09

SUBJECT:

MECHANICAL DRAWINGENGINEER:
D-MDRAWN BY:
RMORDCA: **14295**

SH. 1 OF 1

FILENAME: **HS09**REV: **H**DATE: **02SEP14**

4

3

2

1

THIS PAGE LEFT BLANK