

# TABLE 2


## SOCKET SPECIFICATION

| LEAD STYLE                     | 'B'  |       | "C"  |         | STANDARD INSERTION FORCE |     |              |     | -L OPTION |                                | LOW INSERTION FORCE (-Z OPTION) |     |              |     |
|--------------------------------|------|-------|------|---------|--------------------------|-----|--------------|-----|-----------|--------------------------------|---------------------------------|-----|--------------|-----|
|                                |      |       |      |         | ICA                      | FIG | ICO          | FIG | ICA,ICO   | FIG                            | ICA                             | FIG | ICO          | FIG |
| A                              | .038 | [.96] | .353 | [8.97]  | SC-6P1-XX                | 3   | SC-6P1-XX    | 2   | N/A       |                                | EZ-6P1-XX                       | 3   | EZ-6P1-XX    | 2   |
| B                              | .038 | [.96] | .203 | [5.16]  | N/A                      |     | ** SC-1S1-XX | 2   | N/A       |                                | N/A                             |     | ** EZ-1S1-XX | 2   |
| C                              | .016 | [.41] | .165 | [4.19]  | N/A                      |     | SC-8P1-XX    | 2   | N/A       |                                | N/A                             |     | EZ-8P1-XX    | 2   |
| E                              | .038 | [.96] | .542 | [13.76] | **SC-2P3-XX              | 3   | ** SC-2P3-XX |     | N/A       |                                | ** EZ-2P3-XX                    | 3   | N/A          |     |
| F                              | .008 | [.20] | .293 | [7.44]  | N/A                      |     | SC-1P2-XX    | 3   | N/A       |                                | N/A                             |     | N/A          |     |
| H                              | .038 | [.96] | .703 | [17.86] | N/A                      |     | N/A          |     | N/A       |                                | EZ-2P2-XX                       | 3   |              |     |
| J                              | .038 | [.96] | .600 | [15.24] | **SC-1P3-XX              | 3   | ** SC-1P3-XX | 2   | N/A       |                                | N/A                             |     | N/A          |     |
| L                              | .038 | [.96] | .230 | [5.84]  | N/A                      |     | SC-3P1-XX    | 2   | N/A       |                                | N/A                             |     | EZ-3P1-XX    | 2   |
| M                              | .028 | [.71] | .240 | [6.10]  | N/A                      |     | SC-4P1-XX    | 2   | N/A       |                                | N/A                             |     | EZ-4P1-XX    | 2   |
| N                              | .028 | [.71] | .190 | [4.83]  | N/A                      |     | SC-5P1-XX    | 2   | N/A       |                                | N/A                             |     | EZ-5P1-XX    | 2   |
| S                              | .038 | [.96] | .300 | [7.62]  | SC-1P1-XX                | 3   | SC-1P1-XX    | 2   | SC-1L1-GT | 4                              | EZ-1P1-XX                       | 3   | EZ-1P1-XX    | 2   |
| W                              | .038 | [.96] | .703 | [17.86] | SC-1W1-XX-1              | 3   | N/A          |     | N/A       |                                | EZ-1W1-XX-1                     | 3   | N/A          |     |
| W2                             | .038 | [.96] | .553 | [14.05] | SC-1W1-XX-2              | 3   | N/A          |     | N/A       |                                | EZ-1W1-XX-2                     | 3   | N/A          |     |
| W3                             | .038 | [.96] | .453 | [11.51] | SC-1W1-XX-3              | 3   | N/A          |     | N/A       |                                | EZ-1W1-XX-3                     | 3   | N/A          |     |
| PINS TO HAVE 4 FINGER CONTACTS |      |       |      |         |                          |     |              |     |           | PINS TO HAVE 6 FINGER CONTACTS |                                 |     |              |     |

\*\*SEE NOTES 3 &amp; 4


### FIGURE 2

#### NON-FLUSH ASSY.

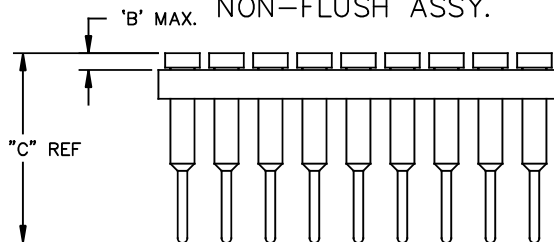

### FIGURE 3

#### FLUSH ASSY.

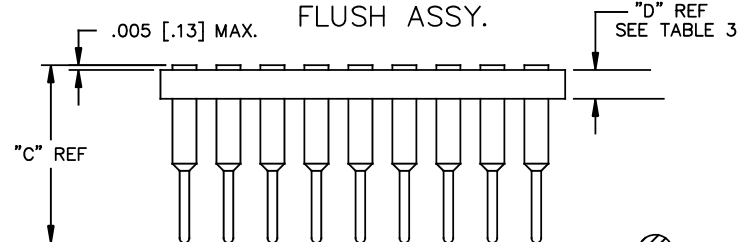

### FIGURE 4

#### -L OPTION


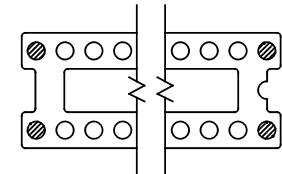


TABLE 4

| SERIES     | LEAD STYLES                  | PACKAGING TUBE | PLUG  |
|------------|------------------------------|----------------|-------|
| -3 (ICA)   | -A, -B, -C, -F, -L, -M, -S   | PT-3-24-01-01  | TP-03 |
| -4, -6, -9 | -A, -B, -C,                  | PT-4-24-02-01  |       |
| -4, -6, -9 | -F, -L, -M,                  | PT-6-24-07-01  | TP-03 |
| -4, -6, -9 | -S                           | PT-9-24-04-01  |       |
| -3         | -E, -H, -J, -W, -W2, -W3     | PT-3-24-05-01  | TP-09 |
| -4         | -E, -H, -J, -W, -W2, -W3     | PT-1-24-01-121 | TP-25 |
| -6         | -E, -H, -J, -N, -W, -W2, -W3 | PT-6-24-07-01  | TP-03 |
| -3         | -C, -N                       | PT-1-24-01-14  | TP-03 |
| -3 (ICO)   | -A, -B, -C, -F, -L, -M, -S   | PT-ICX001      | TP-03 |

⊗ : FILL POSITION WITH SC-1L1-GT  
(EZ-1L1-GT FOR -Z OPTION)  
(STYLE -S, -Z)

FIGURE 5

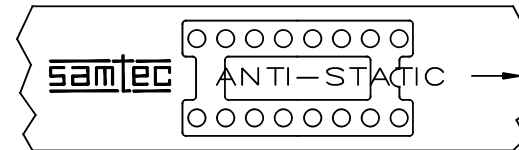

NOTCH IN BODY TO BE LOADED IN DIRECTION OF ARROW.  
(SEE FIG 5)

TABLE 3

| BODY STYLE | "D" REF |
|------------|---------|
| ICA        | .100    |
| ICO        | .050    |

\* PROPRIETARY NOTE \*

THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION AND ALL DESIGN, MANUFACTURING, REPRODUCTION, USE, PATENT RIGHTS AND SALES RIGHTS ARE EXPRESSLY RESERVED BY SAMTEC, INC. THIS DOCUMENT SHALL NOT BE DISCLOSED, IN WHOLE OR PART, TO ANY UNAUTHORIZED PERSON OR ENTITY NOR REPRODUCED, TRANSMITTED OR INCORPORATED IN ANY OTHER PROJECT IN ANY MANNER WITHOUT THE EXPRESS WRITTEN CONSENT OF SAMTEC, INC.

**samtec**

520 PARK EAST BLVD. NEW ALBANY, INDIANA 47150  
PHONE (812) 944-6733 P.O. BOX 1147  
CODE 55322

EXISPROD\ASSEMBLY\DIPI  
ICX-ASM2

ICX-XXX-XXXX-X  
SHEET 2 OF 2