

# BXA40 Series

## Triple output

- Meets telecom power supply interface standard ETS300-132-2
- EN60950, CSA950 and UL1950 safety approvals
- EN61000-4-2, -3, -4, -5, -6 immunity compliant
- Fixed frequency operation at 400 kHz
- MTBF in excess of 500,000 hours
- Basic insulation system with 1500 Vdc isolation
- Pin-compatible with NFC40 Series
- Available RoHS compliant



The BXA40-48T05-12-MJ provides 40 Watts of output power, has been conceived as an applications-specific range of dc-dc converters, specifically addressing telecommunications, industrial electronics, test equipment, mobile telecommunications and distributed power applications. The series offers a wide input voltage range, of 36 Vdc to 75 Vdc, and is available with a 5/±12 V triple output. The BXA40 series is designed to meet ETSI telecoms interface standard ETS300-132-2. With safety approval to IEC950 and basic insulation, the 48 Vdc model is ideal for telecommunications applications. Other features include low output ripple, overvoltage protection, short circuit protection and remote enable.



2 YEAR WARRANTY

All specifications are typical at nominal input, full load at 25 °C unless otherwise stated

### SPECIFICATIONS

#### OUTPUT SPECIFICATIONS

Line regulation (See Note 2)	Main output Auxiliary output	±0.5% ±2.0%
Load regulation (See Note 3)	Main output Auxiliary output	±1.0% ±3.0% typ., ±5.0% max.
Load cross regulation (See Note 4)	Main output Aux. output	±1.0% ±3.0% typ., ±5.0% max.
Ripple and noise (20 MHz bandwidth)	Main output Auxiliary output	50 mV pk-pk, 20 mV rms 100 mV pk-pk, 20 mV rms
Temperature coefficient		±0.02%/°C
Overvoltage protection transorbs fitted	Main output Auxiliary outputs	6.8 V (nom.) 16/20 V (nom.)
Short circuit protection (See Note 5)	Main output Auxiliary output	11 A 5 A
Transient response	25% to 100% load	4.0%
Voltage accuracy	Main output Auxiliary output	±1.0% ±3.0%
Minimum load	Main output Auxiliary outputs	0.6 A 0.03 A/0.04 A

#### INPUT SPECIFICATIONS

Input voltage range	48 Vin nominal	36-75 Vdc
Reverse voltage protection	External fuse	(See Note 7)
Max. input rise and fall time		5 V/ms ETS300-132
Start-up time		30 ms typ.
Remote ON/OFF Logic compatibility ON OFF		CMOS/TTL Open-circuit <1 Vdc

#### EMC CHARACTERISTICS

Conducted emissions	EN55022, FCC part 15, (See Notes 6, 9)	Level B
Radiated emissions	EN55022, FCC part 15	Level A
ESD air	EN61000-4-2, level 3	Perf. criteria 1
ESD contact	EN61000-4-2, level 4	Perf. criteria 1
Surge	EN61000-4-5, level 3	Perf. criteria 1
Fast transients	EN61000-4-4, level 3	Perf. criteria 1
Radiated immunity	EN61000-4-3, level 3	Perf. criteria 1
Conducted immunity	EN61000-4-6, level 3	Perf. criteria 1

#### GENERAL SPECIFICATIONS

Efficiency		83%
Isolation voltage	Input/output Basic insulation, input/case	1500 Vdc 1500 Vdc
Switching frequency	Fixed	400 kHz (typical)
Approvals and standards (pending)		EN60950, UL1950 CSA C22.2 No. 950
Case material		Aluminum substrate with plastic case
Material flammability		UL94V-0
Weight		85 g typ. (3.0 oz)
MTBF	MIL-HDBK-217F	500,000 hours
Size		2.2 x 2.2 x 0.5 inches 55.9 x 55.9 x 12.7 mm

#### ENVIRONMENTAL SPECIFICATIONS

Thermal performance	Baseplate operating temperature Non-operating	-40 °C to +105 °C -55 °C to +105 °C
Thermal impedance (See Note 8)	No air flow, no heatsink No air flow, with heatsink	8.5 °C/W 7.2 °C/W

# BXA40 Series

## Triple output


For the most current data and application support visit [www.artesyn.com/powergroup/products.htm](http://www.artesyn.com/powergroup/products.htm)

INPUT VOLTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT (MAX.)	INPUT CURRENT (1)	TYPICAL EFFICIENCY	MODEL NUMBER (10,11,12)
36-75 Vdc	5 V/±12 V	6 A/±0.4 A	30 mA	83%	BXA40-48T05-12-MJ

### Notes

- Nominal line, at no load.
- Nominal line to high line, nominal line to low line.
- Load regulation:  
Main output (V1): 25 to 100% with 25% to 100% balanced on auxiliaries.  
Auxiliary outputs (V2 and V3): 25% to 100% balanced on all outputs.
- Cross regulation:  
Main output 100% load, auxiliary 100%, other auxiliary 25% to 100%.  
Auxiliary outputs (V2 and V3): main output 100% load, auxiliary 100%, other auxiliary 25% to 100% or main output 25%, auxiliary 25%, other auxiliary 25% to 100%.
- Short circuit protection, ≤ 1 minute on auxiliary outputs.
- For EMI compliance to EN55022 level B please consult factory for details.  
For EMI compliance to EN55022 level A, refer to BXA40 Design Note 101.
- Reverse voltage protection, refer to BXA40 Design Note 101.
- The maximum operating ambient temperature, without derating depends on internal power dissipation and module efficiency and cooling method. Download BXA40 Design Note 101 which provides detailed thermal calculations and design-in hints from the Artesyn website.
- It is suggested that an external filter capacitor be used. A 4 µF (or greater) film capacitor such as: ITW Paktron Capstick series, part number 405K100CS4 4 µF/100 V is recommended, if filtering is not used. See BXA40 Design Note 101.
- The unit with the suffix '-M' at the end of the model number is offered as standard with metric threaded inserts (M3). To order a unit with imperial threaded inserts (4-40 UNC) please remove the suffix '-M' from the model number. These inserts are used for bolting the unit to a PCB and/or fixing heatsinks.
- The 'J' suffix indicates that these parts are Pb-free (RoHS 6/6) compliant. TSE RoHS 5/6 (non Pb-free) compliant versions may be available on special request, please contact your local sales representative for details.
- NOTICE: Some models do not support all options. Please contact your local Artesyn representative or use the on-line model number search tool at <http://www.artesyn.com/powergroup/products.htm> to find a suitable alternative.

PIN CONNECTIONS	
PIN NUMBER	TRIPLE OUTPUT
1	+ Input
2	- Input
3	Control
4	+ Output (V2)
5	Common
6	- Output (V3)
7	+ Output (V1)
8	- Output (V1)
9	No Connection

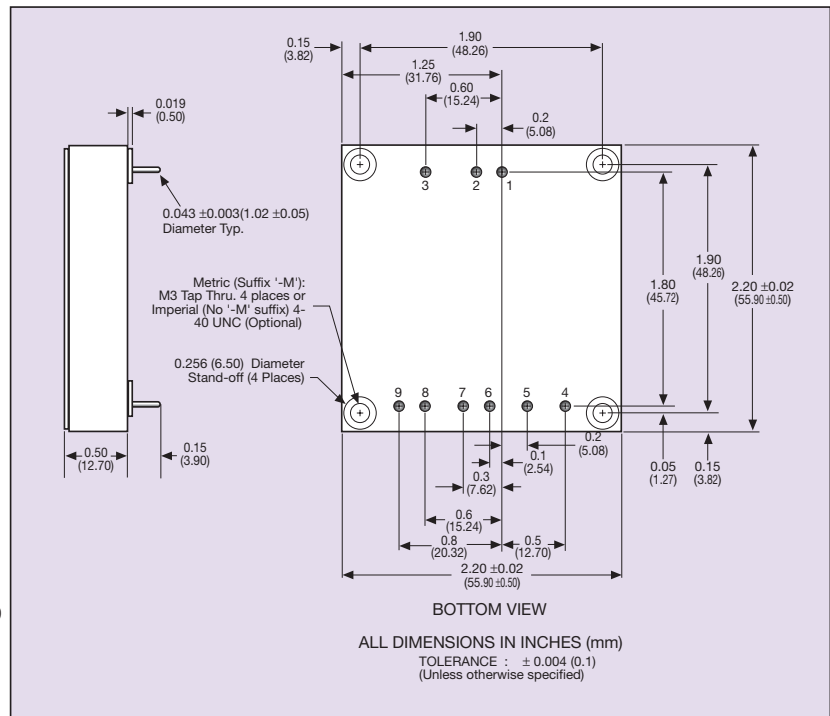

### International Safety Standard Approvals



VDE0805/EN60950/IEC950 File No. 14501-3336-7009  
Licence No. 6296



UL1950 File No. E174104



CSA C22.2 No. 950 File No. LR41062C

Datasheet © Artesyn Technologies® 2005

The information and specifications contained in this datasheet are believed to be correct at time of publication. However, Artesyn Technologies accepts no responsibility for consequences arising from printing errors or inaccuracies. Specifications are subject to change without notice. No rights under any patent accompany the sale of any such product(s) or information contained herein.

Please consult our website for the following items: ✓ Design Note

[www.artesyn.com](http://www.artesyn.com)